



**INDOCTRINATION WORKBOOK**  
**FOR**  
**AIR CONTROLMAN SCHOOL**  
**CLASS A1**



**CNTT-M1235 Rev. 9-84**

**PREPARED BY**

**NAVAL AIR TECHNICAL TRAINING CENTER**  
**NAVAL AIR STATION MEMPHIS**  
**MILLINGTON, TENNESSEE**

**PREPARED FOR**

**CHIEF OF NAVAL TECHNICAL TRAINING**

**OCTOBER 1984**



---

## FOREWORD

This workbook is an indoctrination into the Naval Air Traffic Control training program.

You will learn the various aspects of the air traffic service, its equipment, terminology, and the methods employed by controllers. This indoctrination is designed to present a broad picture of air traffic control and does not attempt to teach all the facets of the subjects discussed. Specific areas mentioned will be taught in detail when it is necessary for you to have a detailed knowledge of them.

Upon completion of this booklet, an examination will be administered by an instructor. This examination is designed to give you a better insight into the areas which may prove to be more difficult later as you progress into the more difficult specific knowledge areas, and which you may wish to review.

---

Throughout this workbook, portions of pages have been left blank for your personal notetaking.



## A LOOK AT AIR TRAFFIC CONTROL

The impact of the industrial revolution in the nineteenth century so changed our economic structure that professional specialization has become essential in our complex and continually changing society. The members of most professions must achieve a knowledge of technical skill and adhere to regulated standards in order to perform the duties of their chosen vocations. The Air Traffic Controller is no exception. Air Traffic Control is an occupation which had its origin scarcely 50 years ago in the wake of budding commercial aviation. During the years following World War II, aviation was regarded by many as a lark, something reserved for daredevils and fools. Foolish as it may have seemed, more and more aviation enthusiasts began to take to the sky. No longer satisfied with remaining within a few miles of the local landing field, pilots began to venture farther and farther away, participating in what is known as a "cross-country flight". However, to fly cross-country, especially during poor weather conditions, or at night, some means of navigational guidance was needed. The U.S. Post Office saw this need while flying transcontinental mail flights in 1921.

### NAVIGATIONAL AIDS (NAVAIDS)

The Post Office began experiments with a NAVAID called a radio direction finder. By using a cockpit instrument, this aid allowed the pilot to "home-in-on" or "fly toward" a device located on the ground. Modern versions are called "radio beacons" and are still in use today. In the 1920's, only a few of these aids were installed and the navigational system remained inadequate. As a result, some interesting methods of navigation were devised for cross-country flying. Pilots flying mail at night followed successive bonfires built by obliging farmers along the route of flight. Another device was the airways beacon. It consisted of a rotating beacon light placed on tall structures along commonly used air routes. The obvious disadvantage to both the fires and the beacons was that both required visual sighting by the pilot.

In areas of bad weather, the two aids listed above were of little use. An all weather system was needed. A system through which the pilot could relay on radio signals received in the cockpit. From this need was born the low frequency radio range. By identifying a radio range signal, a pilot could tell which course of the radio range he was on.

During the mid 1920's, the government began to establish "civil airways" or highways in the sky. At last pilots were able to fly cross-country day or night, in good or bad weather. Range stations have since given way to modern navigational aids such as the VOR and TACAN. These aids will be discussed in later chapters.

## AIRPORT TRAFFIC CONTROL

As aircraft and NAVAIDS improved, air traffic increased to the point that a definite collision hazard existed at major terminals. In 1930, local airport operators began to establish regulations and issue radio advisories to aircraft. In 1941, these duties became the responsibility of the Civil Aeronautics (CAA), forerunner of the FAA.

## EN ROUTE CONTROL

In 1935, a frightening situation came to light. Air transportation was reaching the threshold of self-destruction. Aircraft flying on instruments produced traffic congestion on the airways. No one had ever dreamed of such a thing. The first form of control was established in 1935 by an airline company which made an effort to separate its aircraft by advising them of other known air traffic. Shortly afterwards, several other airlines decided to establish a consolidated office to handle airways traffic information. This in effect became the first Air Route Traffic Control Center. Today there are 25 Centers in operation across the United States.

## FLIGHT SERVICE STATIONS

Control towers and Air Route Traffic Control Centers comprise two of the three options in the Air Traffic Service today. The third is the Flight Service Station. Stations originated in the 1920's and were staffed by men who tended the airway's beacons and range stations and in many cases, seeing that the airport itself was in useable condition.

Today there are over 340 Flight Service Stations in operation. The specialists in these facilities provide preflight and inflight weather and NAVAID status briefings, and process flight movement messages. In general, stations provide pilots information and assistance, in cases of emergency, which aid them in the completion of safe flight.

## RESPONSIBILITY

As an Air Controlman you are primarily concerned with the movement of air traffic. Air traffic controllers have a serious obligation regarding the use of airspace. Airspace is a natural resource which cannot be enlarged, and it will be your responsibility to utilize this airspace to the best advantage. Viewed in this light, you can see the demands of this responsibility. As air traffic continues to increase, more and more facilities will be commissioned. Thousands of military and civilian controllers are being trained to work in these facilities. Probably the most dramatic improvement being made is the implementation of computers. In the future, the automated air traffic system will increase controller productivity by reducing coordination and workload.

## LOOKING AHEAD

To this point, you have had a brief look at the development of aviation and air traffic control. Future chapters and lessons will deal more closely with your responsibilities and obligations as an AIR TRAFFIC CONTROLLER. A closer look will be taken at the three Air Traffic options; what they do and how they work together; what tools of the trade are used, and how all of this will affect you in your chosen position as an AIR TRAFFIC CONTROLLER.


The following pages show the typical working quarters of each air traffic option and describe the primary duties performed by the Air Traffic Controllers.

The structures that house each of the Air Traffic Facilities are unique in appearance.




CONTROL TOWER

Interior view of a tower.

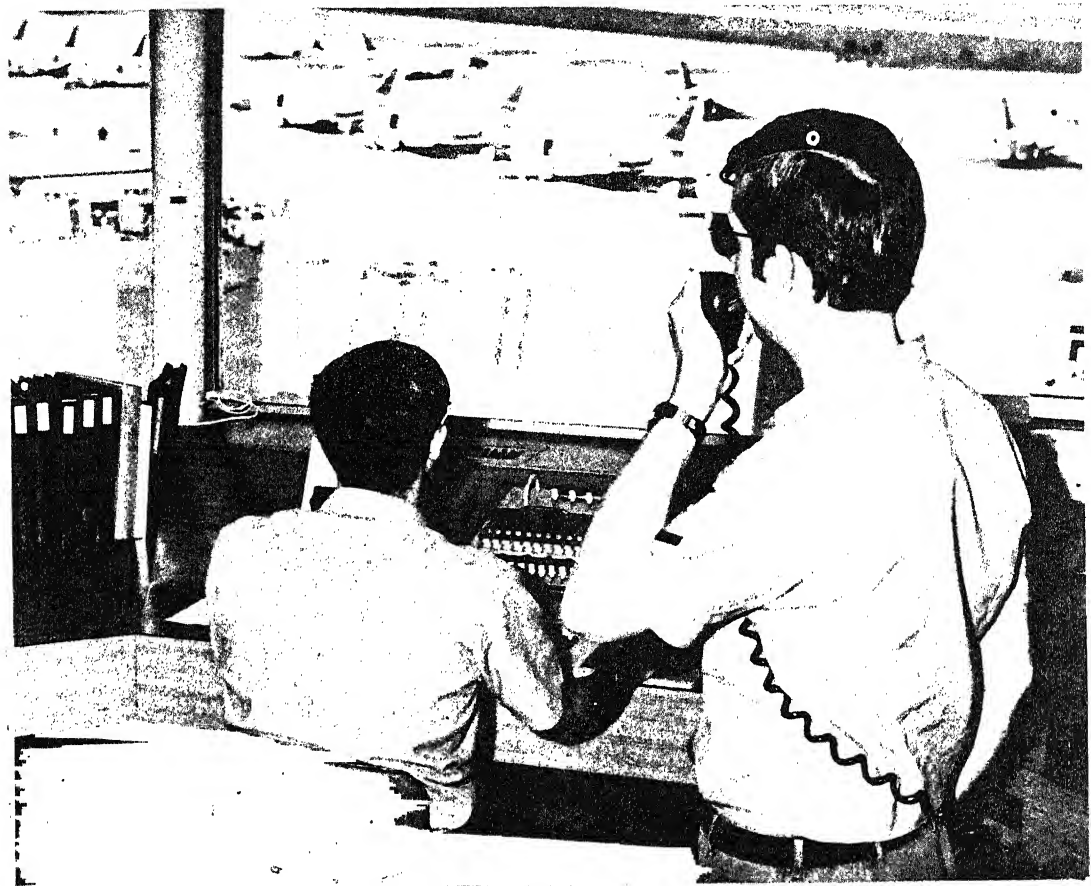


The terminal specialist controls air and ground traffic on and around an airport.

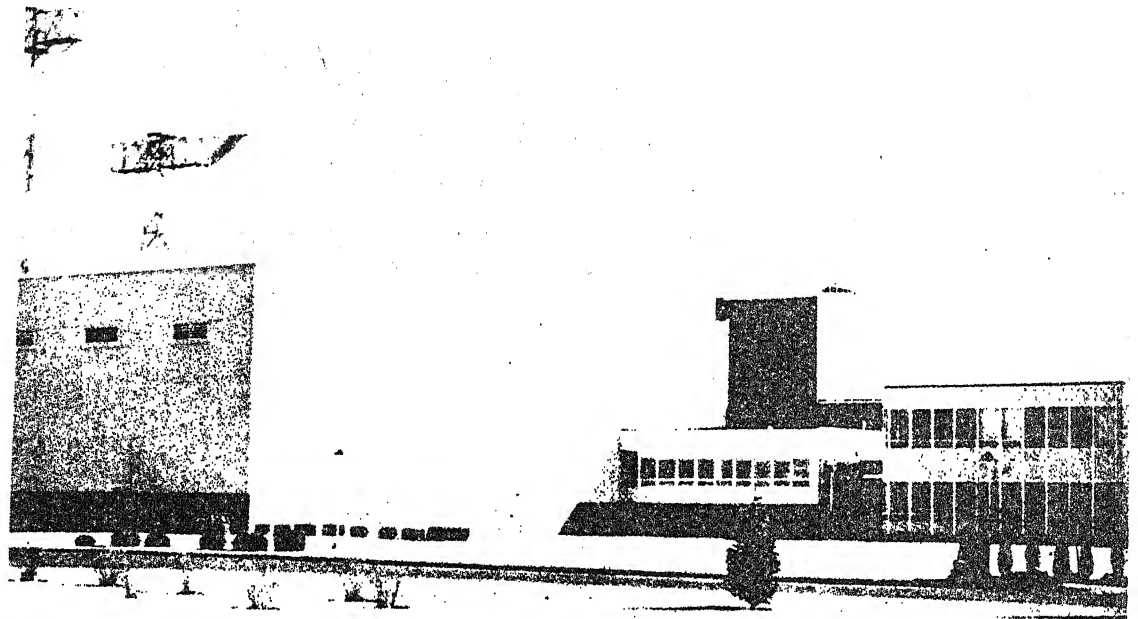

AIR ROUTE TRAFFIC CONTROL CENTER

Interior view of an Air Route Traffic Control Center.

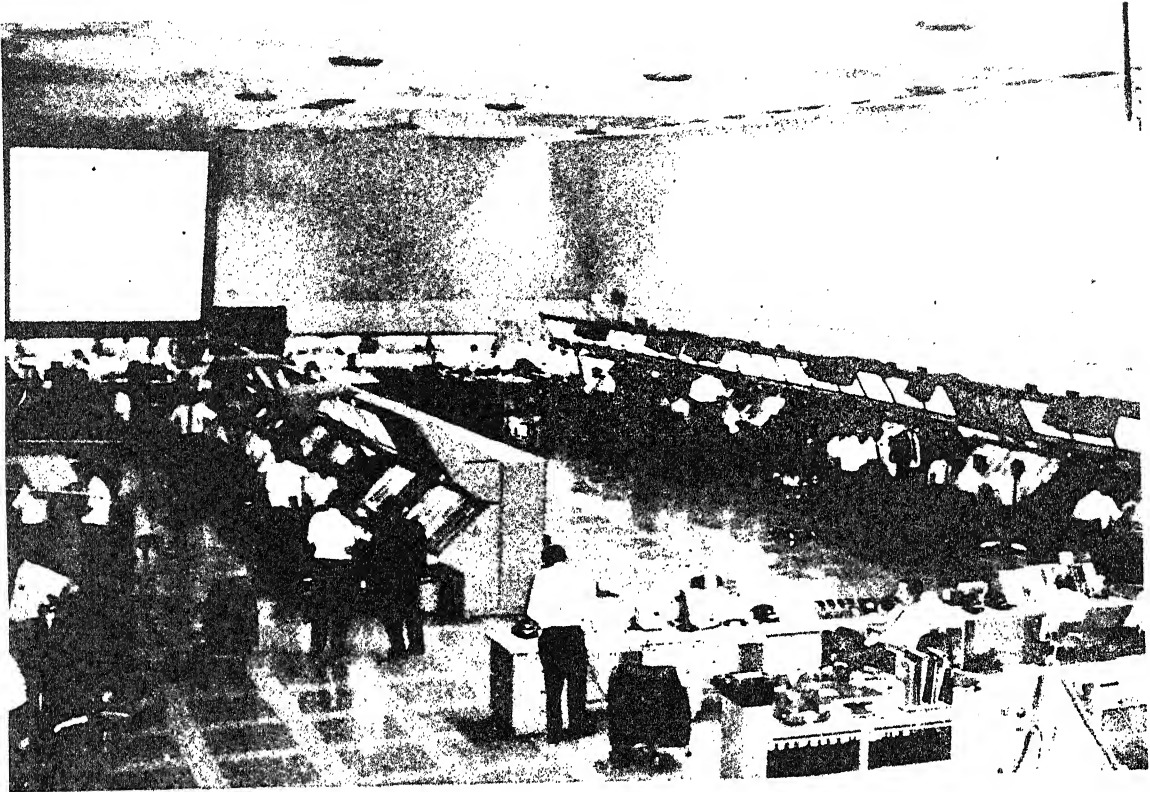


The center controller separates air traffic between airports when this service has been requested by the pilot.






FLIGHT SERVICE STATION

Interior view of a Flight Service Station.

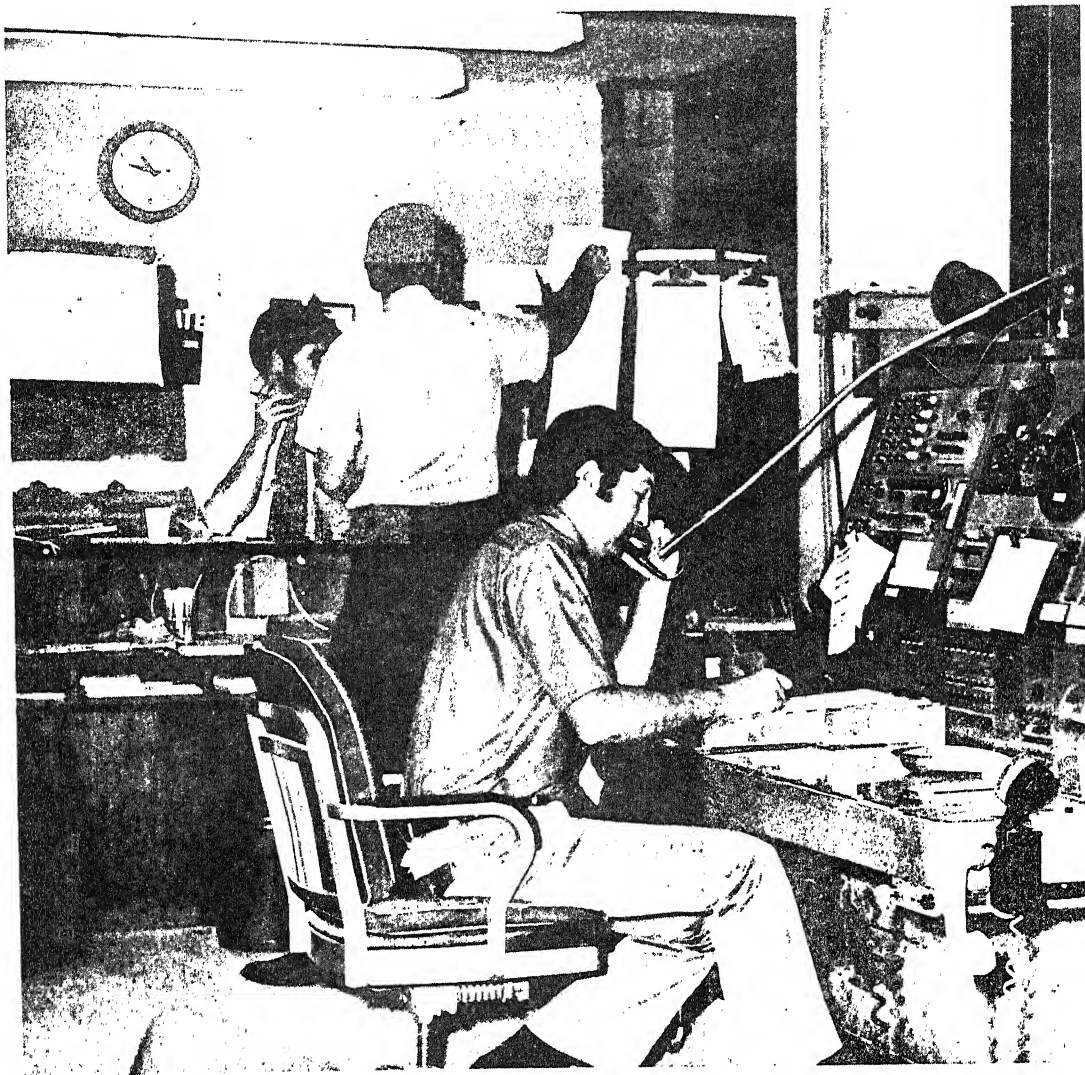

The station specialist has the most in-person contact with the pilot and provides him with information about weather, air navigation, and airport conditions before and during flight.

Illustrated below is an example of a pilot using the air traffic system.

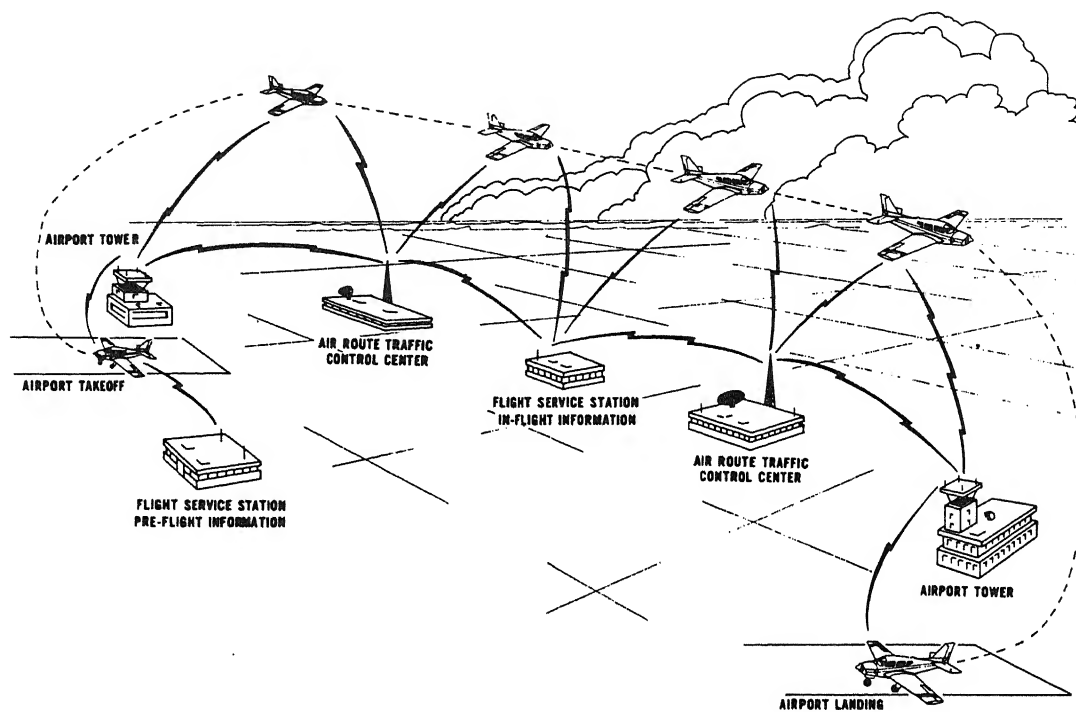

## AIR TRAFFIC SYSTEM

## DIRECTIONS

Use this booklet as a workbook and write your responses to the questions in the space provided. The format is explained below.

Information and/or problems are presented in a sequence called frames and each frame is contained within a set of solid lines.

Information and/or problems are presented in this space and are frequently supported by pictures or illustrations.

A question is usually asked about the information and requires that you respond to the information or problem.

There is a space below each question for you to write your answer.

It may look like this:

\_\_\_\_\_ A.

\_\_\_\_\_ B.

or this:

\_\_\_\_\_  
\_\_\_\_\_


or it may be blank.

A broken line indicates that the correct response is printed below the line. A perforated cardboard is located at the front of this workbook. Remove this and use it as a mask. You should place the mask on the broken line completely covering the answer until you have written your response. After you have written your response, slide the mask down and look below the broken line to compare your response with the answer. If your response is incorrect, review the pertinent frames and correct your response. Then continue to the next set of solid lines.

-----

The correct response appears below this broken line.

# EXAMPLE

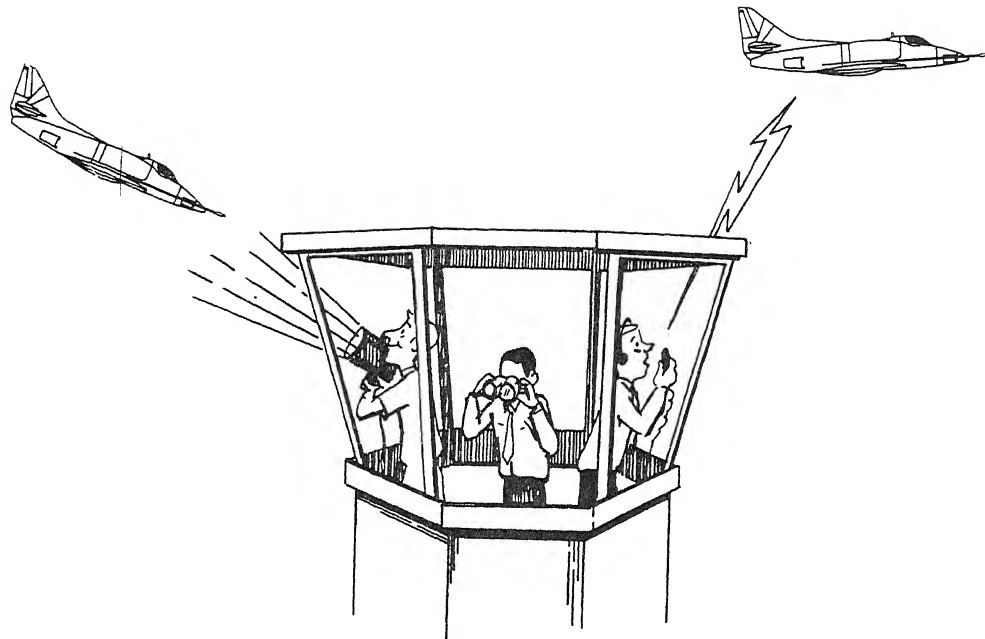

In the above illustration, what two methods are being used by the tower to communicate with aircraft?

---

---

Radio and light signals.

---

SECTION 1  
VFR AND IFR

---


1

Let us now discuss the responsibilities of the pilot as he uses the National Airspace System. Just as motorists must conform to certain regulations while driving-pilots conform to rules of flight established by the FAA. As a motorist you are somewhat affected by changing weather conditions but to a much lesser degree than the pilot. As weather conditions change, the rules of flight affecting pilots also change. To learn more about these rules turn to page 2 and begin with frame #2.

---

Pilots may operate under two different sets of flight rules depending upon the weather. The first is called Visual Flight Rules (VFR) and is generally associated with good weather.

To fly VFR in a Control Zone, the pilot must have at least 3 miles visibility and cannot fly under clouds that are less than 1000 feet above the surface. See illustration below.

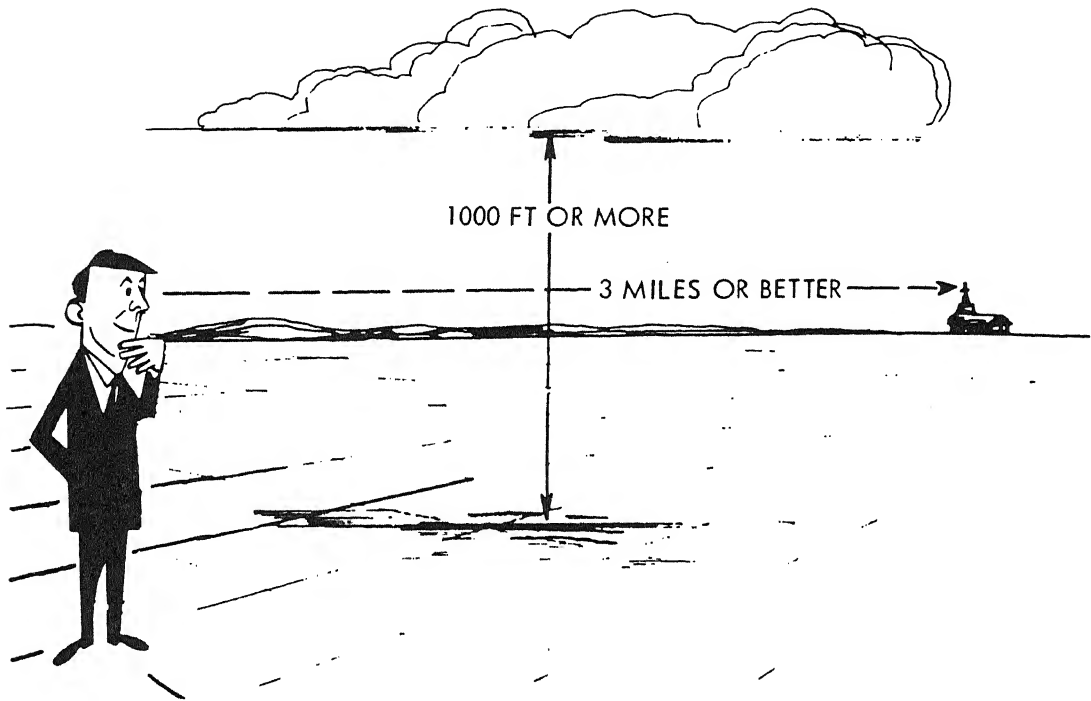


#### VFR MINIMUMS

What minimum height above the ground must the clouds be for a pilot to fly VFR in a Control Zone?

.....

1000 feet

VFR requires that a pilot be able to see and be seen by other aircraft. This see and be seen rule requires 3 miles visibility for aircraft operating on or in the vicinity of a controlled airport.

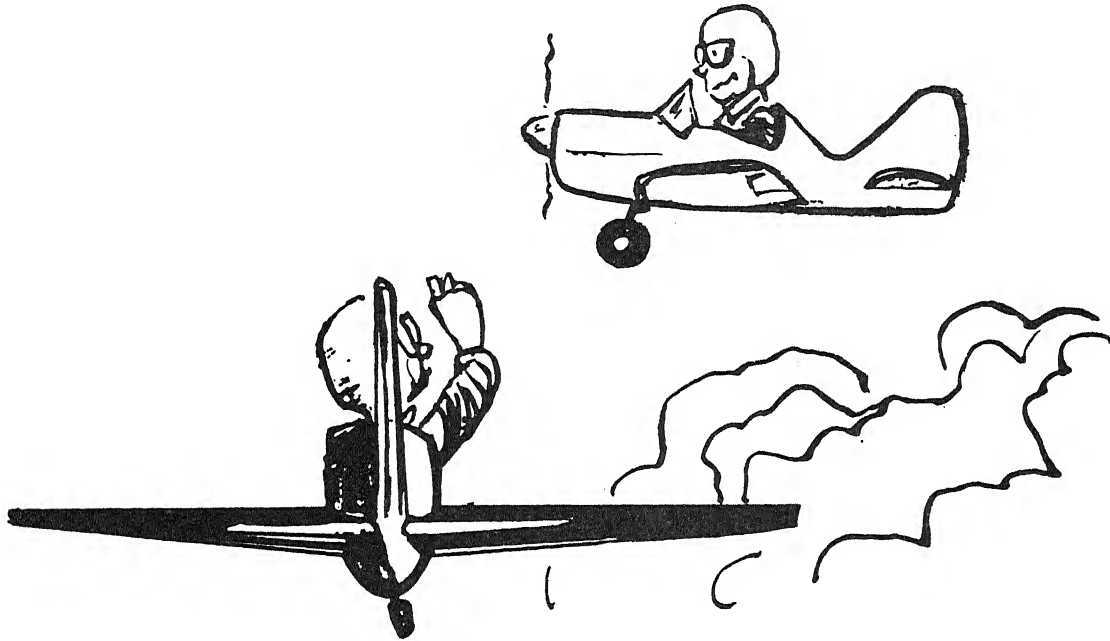

What is one requirement of VFR as shown in the illustration above?

.....

---

Pilots should be able to see other aircraft and be seen.



---

4

What is the contraction for Visual Flight Rules?

.....

---

VFR

---

5

When the weather is such that the pilot cannot fly VFR, he must follow the second rule, Instrument Flight Rules (IFR), however, the pilot must have received special training that qualifies him to fly in poor weather conditions.




The illustration above shows an aircraft flying IFR in a rain shower. He is flying IFR because the visibility is less than how many miles?

---

---

3

When a pilot is flying in an area with less than 3 miles visibility he must fly in accordance with IFR.

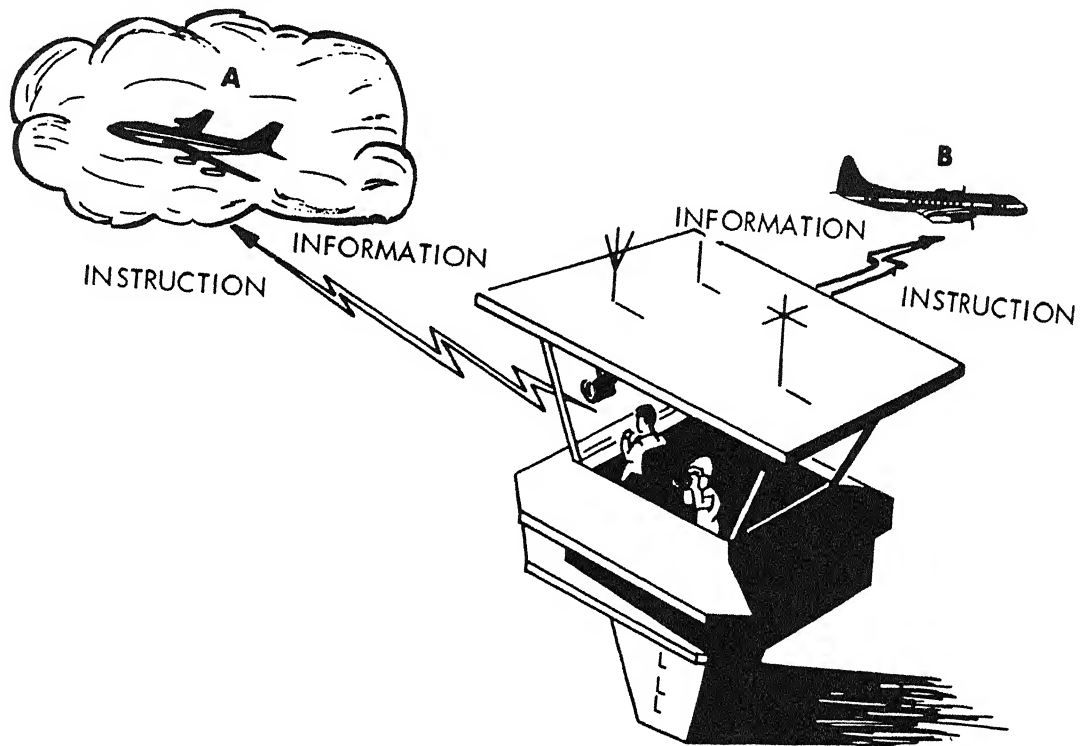

Identify the flight rules by which the aircraft are operating in the above illustration.


..... Aircraft A

..... Aircraft B

IFR Aircraft A

VFR Aircraft B


Instrument Flight Rules (IFR) allow a pilot to operate his aircraft in clouds and in reduced visibility conditions.

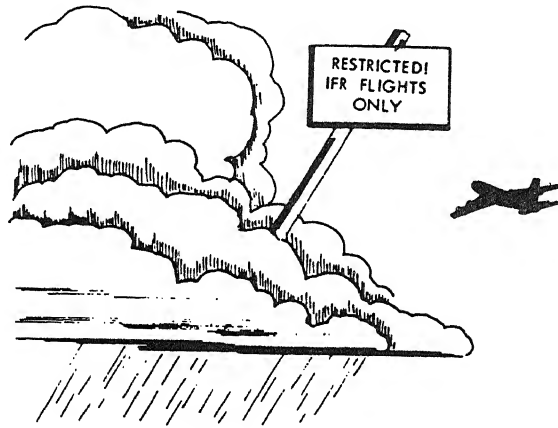

What rules must be followed if the pilot desires to operate in the clouds shown above?

.....


IFR

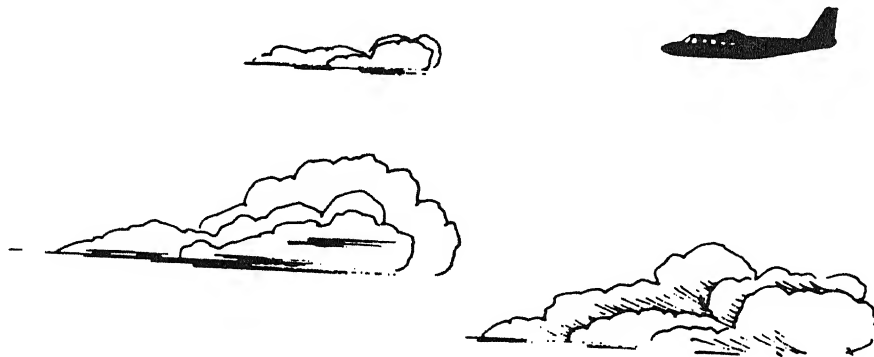

In the above illustration is the aircraft VFR or IFR?

.....

VFR

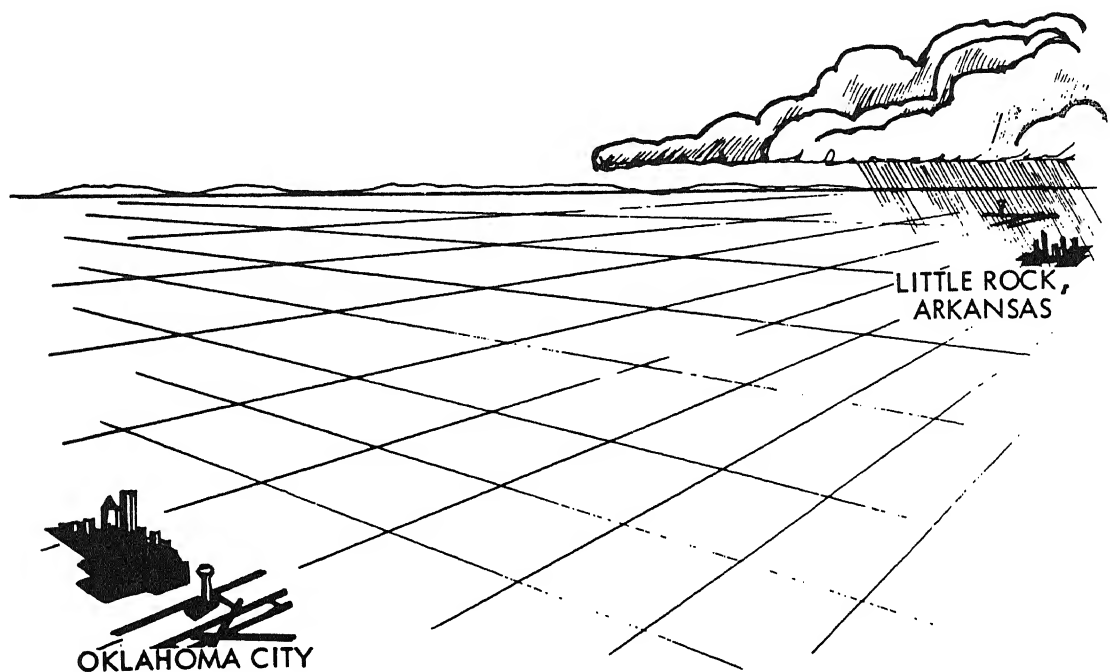

A pilot is flying VFR from Oklahoma City to Little Rock, Arkansas. Rain showers are occurring at Little Rock and are expected to continue for the next 24 hours with low ceilings and poor visibilities. The latter portion of this flight would be conducted in accordance with:

..... A. IFR

or

..... B. VFR

A.


---

10

Since weather conditions have such an important effect upon flight, it follows that pilots must have access not only to current information, but to forecasted weather conditions along their proposed route of flight. The next section will discuss the various types of aviation weather information available to pilots.




---

Weather service to aviation is a joint effort of the National Weather Service (NWS), the Federal Aviation Administration (FAA), the military weather services, and other aviation oriented groups and individuals.

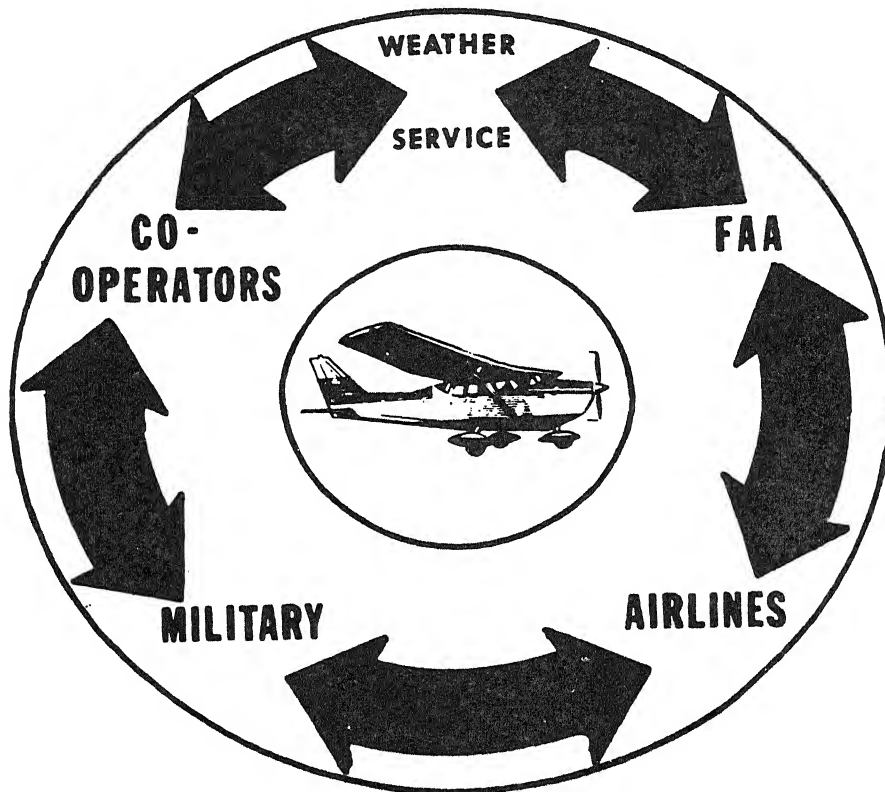


These sources are composed of private as well as governmental agencies. The National Oceanic and Atmospheric (NOAA) oversees and controls the National Weather System.

The weather observation is a measurement and/or estimate of the existing weather conditions which gives us a picture of the weather at the time of observation. Surface weather observations are taken each hour at the locations shown below.

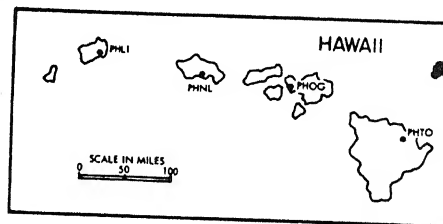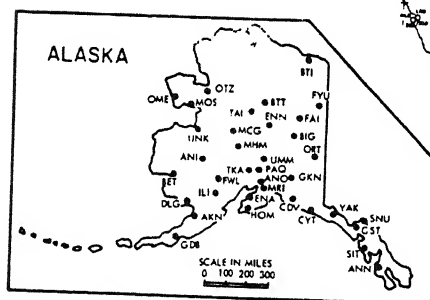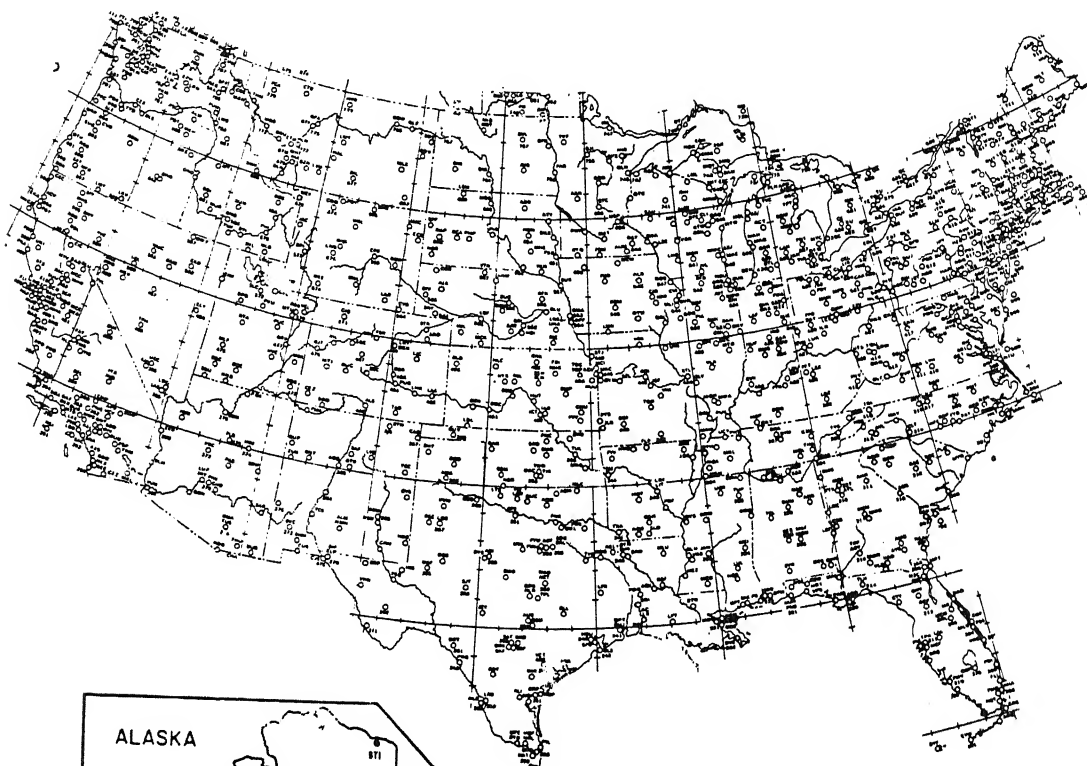


The weather observer normally takes a weather observation once each hour. However, any weather changes which affect flying are reported immediately. When taking weather observations, the observer may use ceilometer, ceiling lights, or balloons to determine cloud heights.

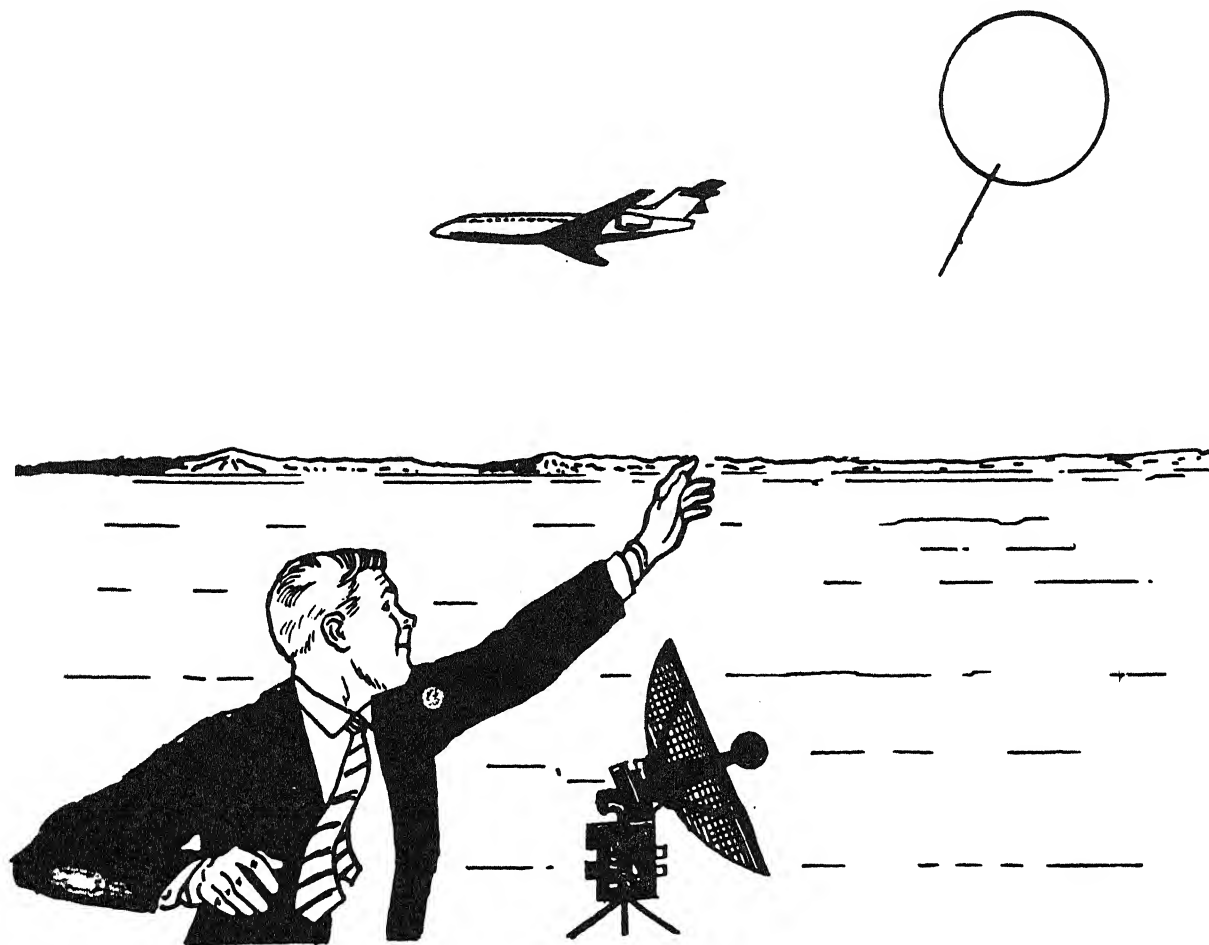



We have different kinds of weather occurring across the country simultaneously.

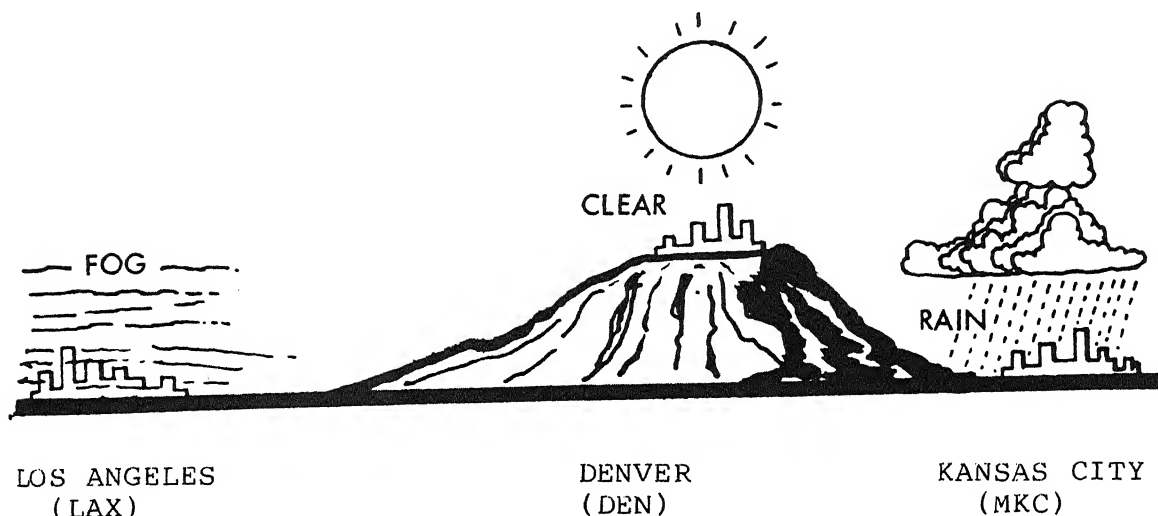

Over which city would the pilot most likely encounter VFR weather?

.....

-----

Denver

15

A weather observation reflects the:

..... A. Current weather.

..... B. Weather that may occur.

-----

A.

-----

---

16

Which of the following are characteristics of a surface weather observation?

- ..... A. A weather forecast.
- ..... B. Is made every hour at individual locations throughout the United States.
- ..... C. Predicts if a Tornado will occur.
- ..... D. A report on local weather conditions.
- ..... E. Reflects if the weather is good or bad.

---

B.

D.

E.

---

17

Previously in frame 14 we emphasized the weather is quite different at various locations. Scan this example of a teletypewriter message supplying surface weather observations.

```
DEN CLR 15 170/36/35/1905/006/PATCHES SHLW GF ALQDS
FSR M20 BKN 90 BKN 10 28/25/2304/009/CLDS TPG MTNS E-S-SW
GLD S W2 X 1RLF 201/44/42/1412/012
HLC M9 BKN 15 OVC 9 239/46/44/1613/021
RSL S E9 BKN 20 OVC 10 260/44/42/1810G20/27
SLN M50 OVC 12 263/45/42/1410/029
CNK M36 OVC 15 263/44/42/1710/029
TOP M40 OVC 10R-286/45/41/1007/036
MKC M60 OVC 7R-283/45/38/0909/035
MCI M70 OVC 12R-44/35/1407/034
STJ E70 OVC 7R-42/38/1306/033
COS CLR 15 207/36/31/0406/013
PUB CLR 7 185/41/37/0000/011
LAX S W5 X 2F 176/39/36/2905/010
```

Note that each weather report begins with a 3-letter identifier. These 3 letters identify the airports from which weather is available. The surface weather reports above contain current weather information from:

- .... A. Los Angeles (LAX), Denver (DEN), Kansas City (MKC), and many other cities.
- .... B. Los Angeles (LAX), Denver (DEN), Kansas City (MKC), only.

---

A.


In addition to the surface observations made by the observer, the weather system also provides for the detection of precipitation by using radar. The weather radar locations are shown below:

#### WEATHER RADAR NETWORK



Through the combined reporting of these radar locations, we are able to plot on a map the areas affected by precipitation.

Precipitation echoes appear on the radar scope as bright spots. The illustration below shows an area of precipitation would appear on a typical radar scope.

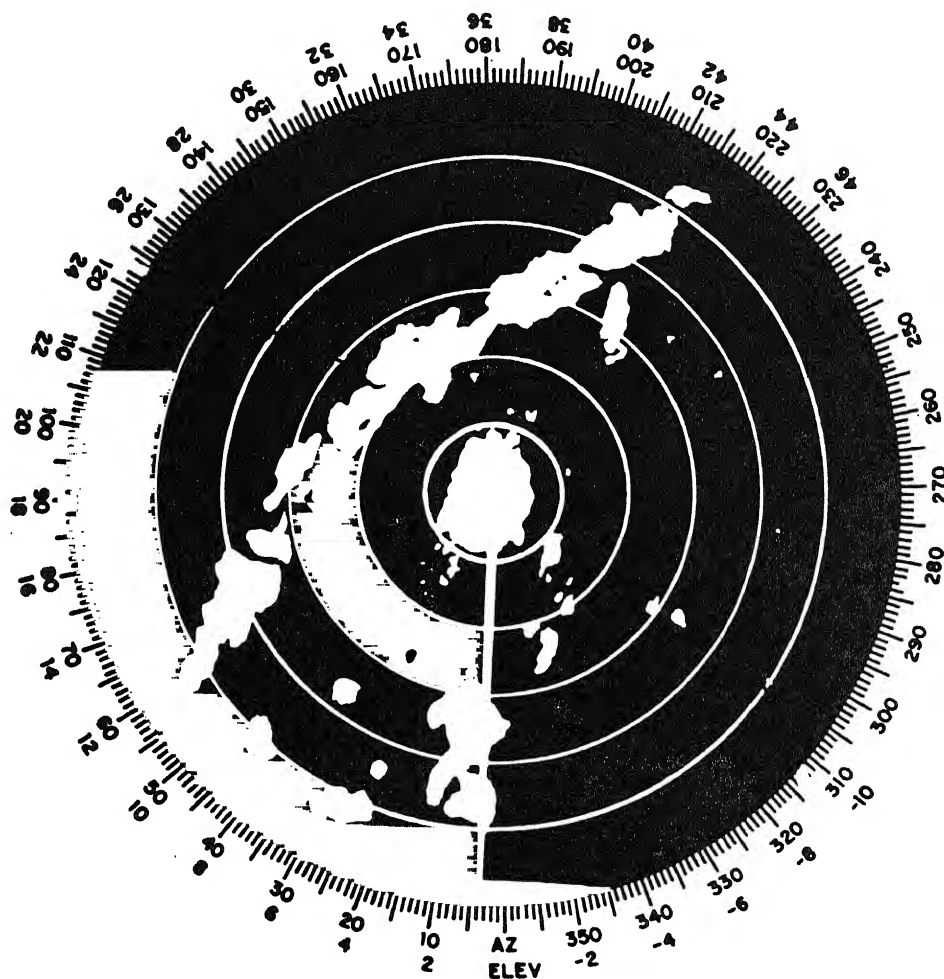

---

20

Under what conditions would the observer make a weather observation more often than once each hour?

.....

---

When certain weather changes affect flying.

---

21

What equipment is used disseminate surface weather observations?

.....

---

Teletypewriter

---

22

What is the purpose of making weather observations by using radar?

.....

---

To locate areas of precipitation

---

---

23

The following are examples of radar weather reports as they appear on the teletypewriter network.

AQQ 1333 AREA3TRWX/NC 278/185 134/110 153/195 232/170 C1208 MT 420  
AT 186/66 TOP 410 AT 143/113 and 221/108  
00 000 000 6410 888

SIL 1331 SPL AREA2TRWX3R/NC 284/210 33/50 119/160 188/215 C1312  
MT 540 AT 197/88 TOP 450 AT 227/89 TROP 500 AREA2RW-/NC 353/120  
315/100 18W C2312 MT 240 AT 333/111  
1011 4114 6464 4622

GLS 1332 AREA2TRW + 1R-/NC 12/230 95/250 176/225 260/245 C2115 MT  
380 67/40  
0 202 200 2144 0002

---

24

What is the difference between a radar observation and a surface observation?


.....

---

A surface observation is the weather as seen by the observer. A radar observation shows a precipitation pattern.

---

In addition to the surface observation and radar observation, the weather system receives Pilot Weather Reports (PIREPS). Pilots report the weather they see or encounter to stations, towers, and centers. See illustration below.

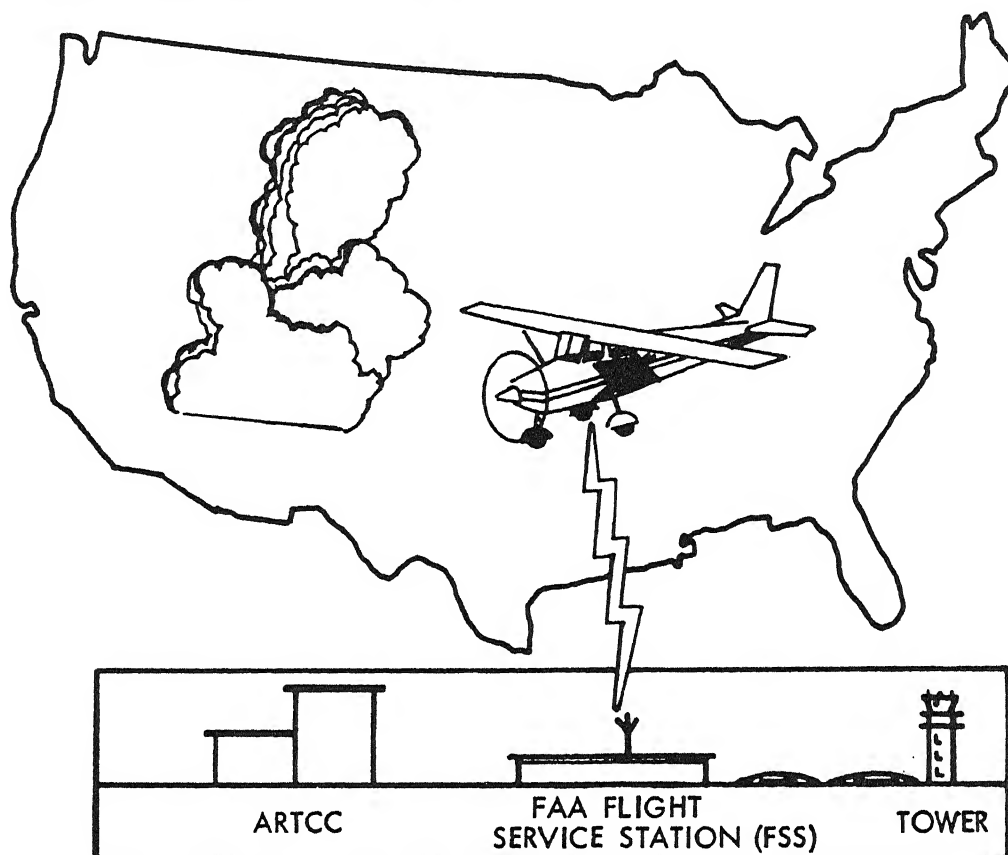


26

This is what the pilot says: "AT SIXTEEN TWENTY ZULU I ENCOUNTERED LIGHT RIME ICE AT FIVE THOUSAND FEET, TWENTY MILES SOUTH OF ALBUQUERQUE. I'M FLYING A CESSNA ONE SEVENTY TWO".

Station specialists receive these reports and transmit them by teletypewriter. The message may look like this:

ABQ PIREP 20S ABQ 1620 LGT RIME ICE 50 C172

FAA FLIGHT SERVICE STATION

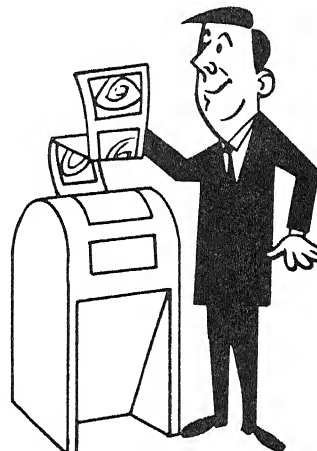

All air traffic facilities may receive PIREPS. Which facility would most likely handle the majority of the messages?

.....

-----  
Flight Service Station.

27

A radar weather report comes from observing radar. A PIREP comes from:

.....

-----  
The pilot.  
-----



28

What does the contraction PIREP stand for?

.....

Pilot Weather Report.

29

What are the three types of current weather information that are made available to pilots and aircraft operators?

A. ....

B. ....

C. ....


A. Surface observations

B. Radar observations

C. Pilot weather reports

30

The National Weather Service System also includes weather forecasts, which are weather conditions expected to occur. Forecasts aid pilots and aircraft operators. One type of forecast is the Area Forecast. The Area Forecast is simply a forecast which covers specific geographical area. Shown below are the Weather Bureau offices which prepare area forecasts (FA) for transmission.

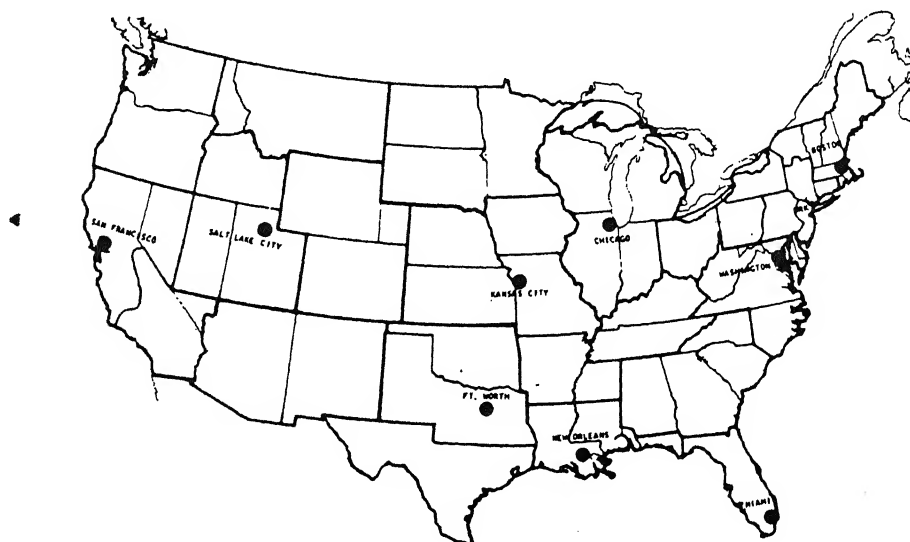

31

Is a weather forecast:

..... A. A prediction of weather expected to occur?

or

..... B. An observation of weather conditions as they exist at a given location?

-----

A.

32

What is meant by "current weather"?

.....

-----

The weather at observation time. (Observed weather.)

33

If current weather occurring at observation time, what is forecast weather?

.....


-----

Forecast weather indicates conditions that are expected to occur.

34

After the Aviation Weather Forecaster prepares the Area Forecast (FA), it is transmitted to the various offices for use by pilots, aircraft operators, and Air Traffic Control Specialists as illustrated below.

WSFO

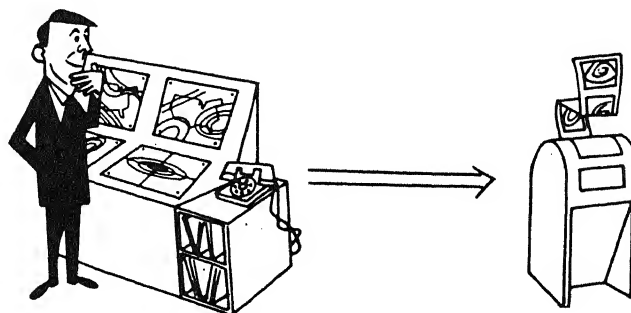

Below is an example of an Area Forecast (FA) message. The area covered is Minnesota (MINN), Iowa (IA), Missouri (MO), Wisconsin (WIS), Illinois (ILL), Michigan (MICH), Indiana (IND), Kentucky (KY), Lake Michigan (LK MICH), U.S. portions Lake Superior (LK SUPR), and Huron.

Scan this example.

CHI FA 091240  
13Z WED-07Z THU.  
OTLK 07Z-19Z THU.

MINN IA MO WIS ILL MICH IND KY LK MICH U.S. PTN LKS SUPR AND HURON  
HGTS ASL UNLESS NOTED...

SYNS...CDFNT S OHIO WSWWD ACRS S ILL S MO MOVG SLOLY SWD TO EXTRM  
KY NW TENN N ARK BY 07Z THU.

SIGCLD AND WX...

SE HLF MO S THIRD ILL S IND AND KY...  
AHD CDFNT 30-50 SCT VRBL BKN 80-120 BKN LYRS TO 180 WDLY SCT 3-5  
TRW/RW CB TOPS 450. BHD CDFNT 40-50 SCT VRBL BKN MCHG ARND 00Z  
NO SIGGLD AND WX. E9...O S KY CIGS OCLY BLO 10 AND VSBYS FQTLY BLO  
3 MIS IN FOG AND H TIL 15Z. OTLK...KY MVFR/CIGS. ELSW VFR.

LK SUPR UPR MICH N HLF LK MICH N THIRD LWR MICH LK HURON...CIGS  
40-50 SOME WDLY SCTD RW TOPS 120-150. BMG AFT 00Z OVR LAND AREAS  
40-50 SCT. OTLK...VFR.

MINN IA NW HLF MO WIS N TWO THIRDS ILL S HLF LK MICH S TWO THIRDS  
LWR MICH N IND...  
NO SIGCLD AND WX BCMG 15Z-17Z 40-50 SCT VRBL BKN. AFT 00Z NO SIGCI  
AND WX. OTLK...VFR.

ICG...SVR MXD ICG IN CBS. FRZLVL 80 N MINN SLPG UP TO 150 S MO KY.


The fourth line in this message represents the states included  
in the message.

Name the forecast that indicates weather expected to occur over a  
wide area.

.....

Area Forecast.

A second type of forecast is the Terminal Forecast (FT). As indicated by the name, it is the weather forecaster's prediction of what the weather is expected to be at a specific airport during a specified time. Shown below are the Weather Bureau officers that issue Terminal Forecasts.

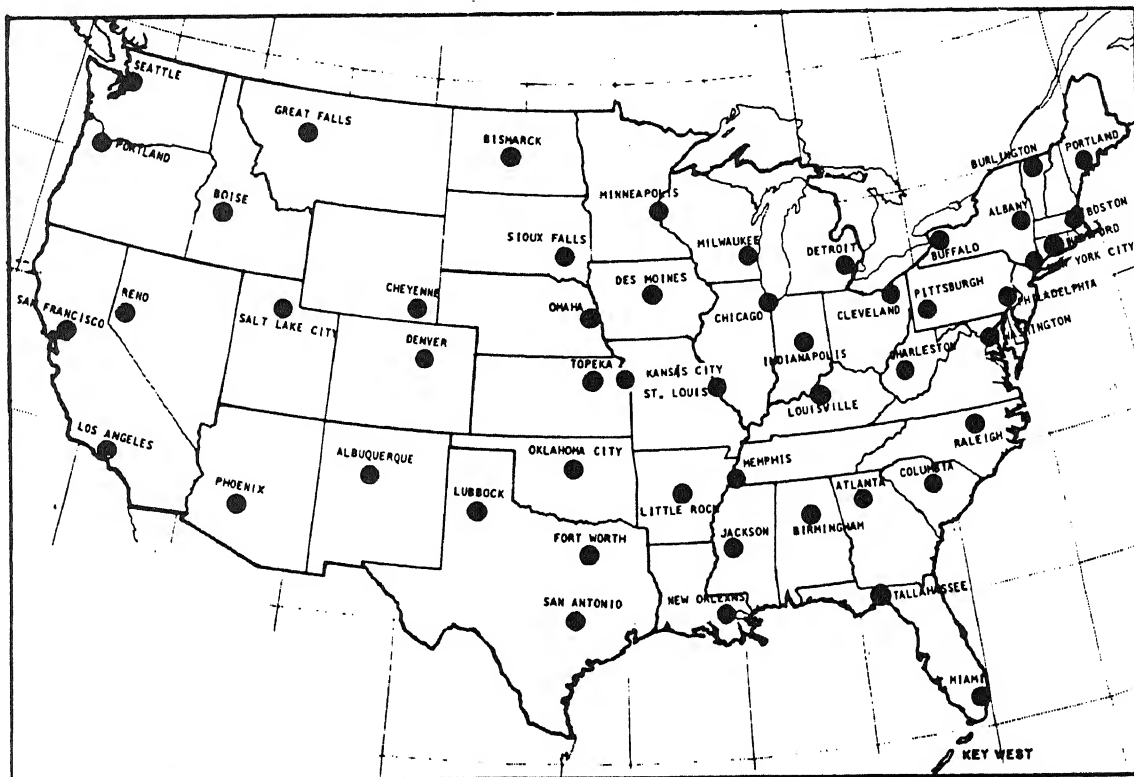

38

The Terminal Forecasts (FT) are transmitted to the various offices throughout the United States for use by pilots, aircraft operators, and Air Traffic Control Specialists. A Terminal Forecast message looks like this:

OKLAHOMA 041445

ADM 041515 CLR 6H. 17Z SCT. 01Z CLR. 09Z MVFR GF..

GAG 041515 CLR..

HBR 041515 CLR..


MLC 041515 CLR 6H. 17Z 40 SCT. 01Z CLR. 09Z MVFR GF..

OKC 041515 CLR..

PNC 041515 CLR..

TUL 041515 CLR. 18Z 40 SCT. 00Z CLR. 09Z MVFR GF..

FAA FLIGHT SERVICE STATION

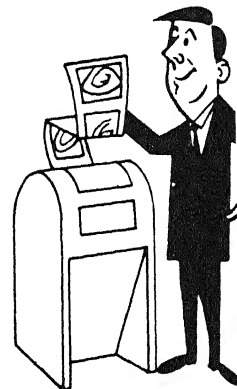

MISSOURI 041450

CGI 041515 C10 BKN 3GFH. 17Z 10 SCT C90 BKN 5H. 19Z 50 SCT 80 SCT.

00Z 250-

SCT. 09Z VFR..

Compare the area of coverage between a Terminal Forecast and an Area Forecast.

.....  
.....  
.....

The Terminal Forecast, forecasts the weather for a specific airport, and the Area Forecast indicates expected weather for a large geographical area.

39

A pilot plans to arrive in his private aircraft at Cleveland at 2:30 PM. If he leaves Kansas City at 8:00 AM, what type of forecast will provide him with the expected weather for his landing?

.....

Terminal Forecast.

40



Which type of forecast will give him the weather expected over Indiana, Illinois, and Missouri during his flight?

.....


---

Area Forecast



41



SAN FRANCISCO  
(SFO)



CHICAGO MIDWAY  
(MDW)



ALBUQUERQUE  
(ABQ)


Weather observers report the weather shown above. What is the difference between this report and a Terminal Forecast for these cities?

.....  
.....

---

The observer reports the weather he sees and the Terminal Forecast is for a future time.

The Winds and Temperatures Aloft Forecast (FD) is a third type of forecast. This forecast predicts the winds and temperatures aloft at certain levels above the ground. It is prepared by an electronic computer in Suitland, Maryland and contains information for the locations shown on the map below.

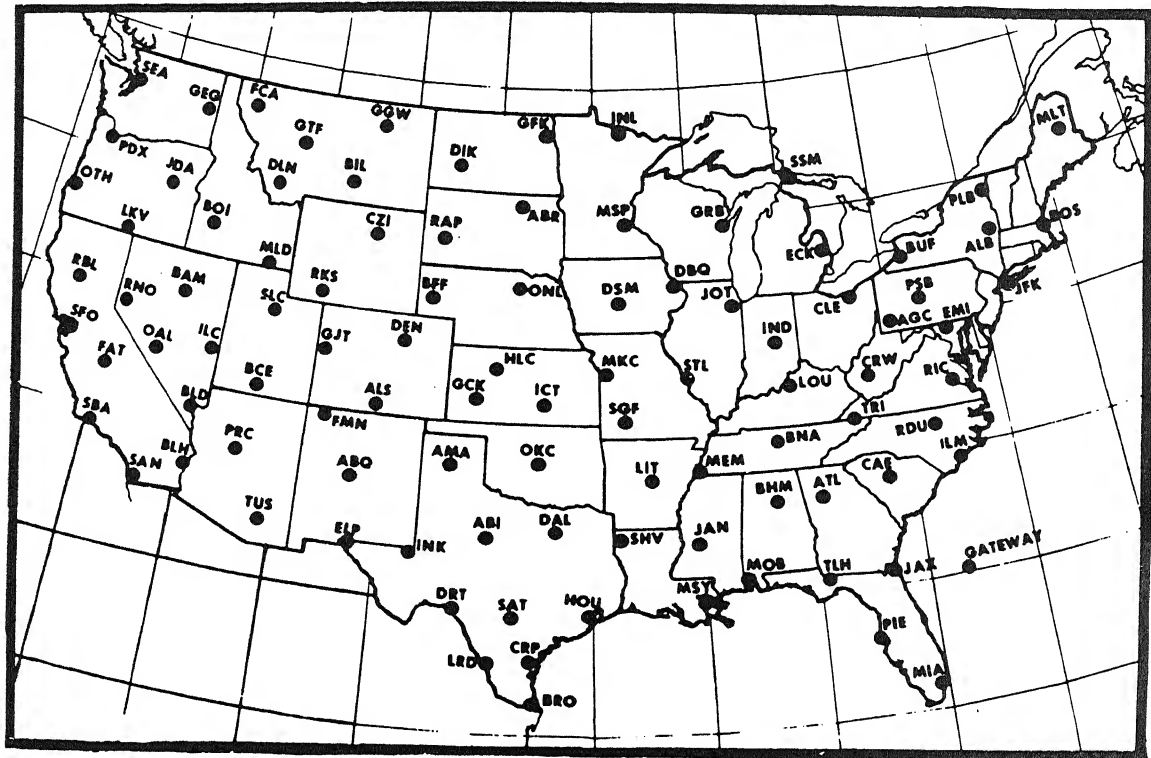

3  
The Winds and Temperatures Aloft Forecast (FD) message looks like this:

Scan this example:

FDUS1 KWBC 110545  
DATA BASED ON 110000Z

VALID 111200Z FOR USE 0600-1500Z. TEMPS NEG ABV 24000

FT	3000	6000	9000	12000	18000	24000	30000	34000	39000
ABI		3610-04	3309-08	3111-14	2716-26	2624-37	263149	273552	274152
ABQ			3415-06	0127-12	3536-24	3557-36	348149	348755	337056
ALS				3625-13	3536-25	3548-37	356650	347457	346258
AMA		3616	0119-09	3519-14	3322-27	3325-38	332851	332854	313154
ATL	0407	9900-03	2516-05	2529-09	2456-17	2480-28	740941	743048	744255
BHM	0205	2605-03	2515-06	2525-09	2451-18	2477-28	740841	743148	743554
BLD	0906	9900+05	3409-01	3319-05	3341-17	3253-30	326846	327755	318164
BNA	3607	2808-08	2716-10	2724-13	2548-22	2575-32	740844	742951	742253
BOI		1815-03	2317-04	2626-07	2832-19	2945-32	296348	297356	297565
BRO	0312	9900+05	2616-01	2731-06	2655-17	2576-26	741541	742549	750854
CRP	0408	9900+02	2611-04	2722-09	2545-20	2467-29	740743	751050	259453
DAL	0216	3311-05	3111-09	2912-14	2523-25	2440-36	245748	246253	255752

---

44

In planning a flight from Oklahoma City, Oklahoma, to St. Louis, Missouri, what type forecast would the pilot use to determine the wind and temperature at 9000 feet?

.....

---

Winds and Temperatures Aloft Forecast.

---



---

45

Below is a list of weather forecast information requested by different pilots. Write the abbreviations of the forecasts in which this information is found.

- ..... A. The forecast for San Francisco (SFO).
- ..... B. The forecast for Arkansas, Tennessee, Kentucky, and Mississippi.
- ..... C. The northwestern half of Texas and the western half of Oklahoma.
- ..... D. Winds for 12,000 feet over Des Moines, Iowa (DSM).
- ..... E. Temperatures at 30,000 feet for Minneapolis, Minnesota (MSP).

-----

FT A.

FA B.

FA C.

FD D.

FD E.

---

46

List the three forecasts available to pilots, aircraft operators, and Air Traffic Control Specialists.

A. ....

B. ....

C. ....

-----

A. Terminal Forecast

B. Area Forecast

C. Winds and Temperatures Aloft Forecast

---

47

Name the three observations that reflect current weather.

A. ....

B. ....

C. ....

A. Surface observations

B. Radar observations

C. Pilot weather reports

48

What equipment is used to prepare Winds and Temperatures Aloft Forecasts (FD)?

.....

Computer

49

When any of the Area Forecast Offices shown below anticipates hazardous weather forming or occurring which may affect all aircraft in flight, they issue a message called a SIG-nificant MET-eorological Information message. The message title is shortened to SIGMET.



---

50

A SIGMET message looks like this.

FL DEN 090230  
090230-090700

SIGMET BRAVO 7. ROCKY MTN AREA COLO AND SRN WYO. STANDING WVS E  
OF RDGS CAUSING EXTNSV AREAS OF STG UP AND DOWN DRAFTS AND LCLY SVR  
TURBC TO 180. CONDS CONTG PAST 0700Z

The SIGMET above warns pilots of strong up and down drafts and  
locally severe turbulence up to 18,000 feet.

---

51

These SIGMET messages are sent to all offices in the affected area  
for delivery to the pilots that are flying through or plan to fly  
through the area outlined in the message.

---

52

The Aviation Weather Forecaster also prepares messages called  
AIRMen's METeorological Information (AIRMET). An AIRMET forecasts  
another type of unfavorable weather. These weather conditions,  
while not as hazardous as SIGMET conditions, could still affect the  
safety of flight. As in the SIGMET, the extent of the weather  
covered by this message is specified in the advisory.

Here is an example of an AIRMET.

FL GSW 240920  
240920-241400

AIRMET CHARLIE 9. OVR NWRN TEX AND WRN OKLA GENLY W OF ENID BIG  
SPRING LN CIGS FQTLY BLO 1 THSD FT VSBYS LCLY BLO 2 MI. CONDS CONTG  
PAST 14Z

---

53

What is the name of the message that warns the pilot of weather  
that could damage his aircraft?

.....

---

SIGMET

54

What is the name of the message that warns the pilot of weather that only affects light aircraft?

.....

---

AIRMET

55

What other kind of forecast is prepared by the Weather Bureau Office issuing SIGMETs and AIRMETs?


.....

---

Area Forecast.

56

Turbulence is the bouncing of an aircraft in flight by sudden changes in directions of airflow. If the forecaster expects these irregular air currents to cause only discomfort to passengers and crew, he would advise pilots by an AIRMET. If however, it is expected that the turbulence could damage the aircraft, the forecaster would warn the pilots through a SIGMET.

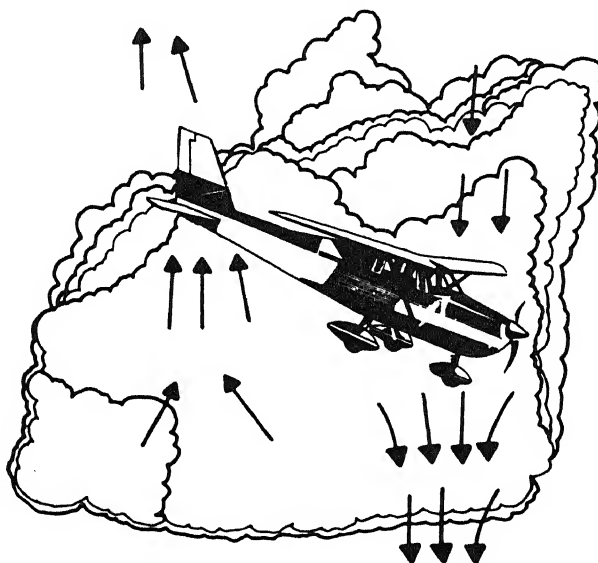

57


If an airplane flies into a strong upward flow it will be forced up. What might be a danger if an aircraft encounters a strong downward flow of air at a low altitude?

.....

Could be forced into a ground object - such as a mountain top or hill.

58

An air mass is a large body of air which contains relatively uniform properties and covers a large area. This could be a cold body of air moving from the Arctic Zone, or a warm body of air from the Tropical Zone. These air masses are usually associated with high pressure systems.

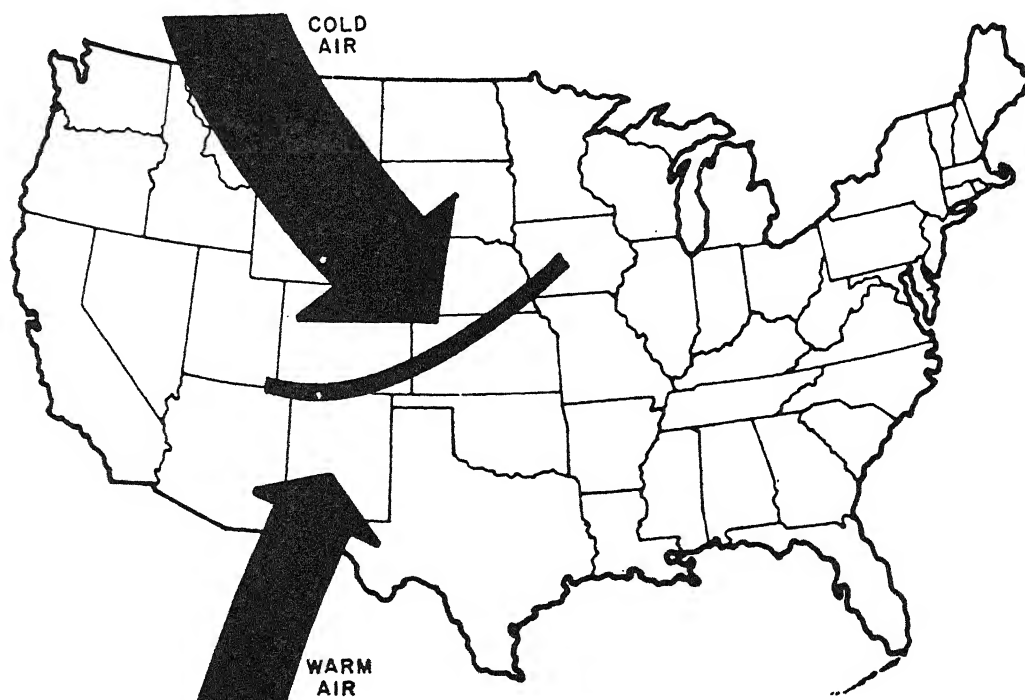

59

An air mass is a body of air covering a large area and is usually associated with what type of pressure system?

.....


High pressure.

60

A frontal zone forms in the contact area between two differing air masses. As shown in frame 58, this frontal zone is the heavy line between the two air masses.

61

Sometimes a low pressure area develops within a frontal zone. Low pressure areas are characterized by counterclockwise flow of air around the center. Place an L in the low pressure area on the illustration below.

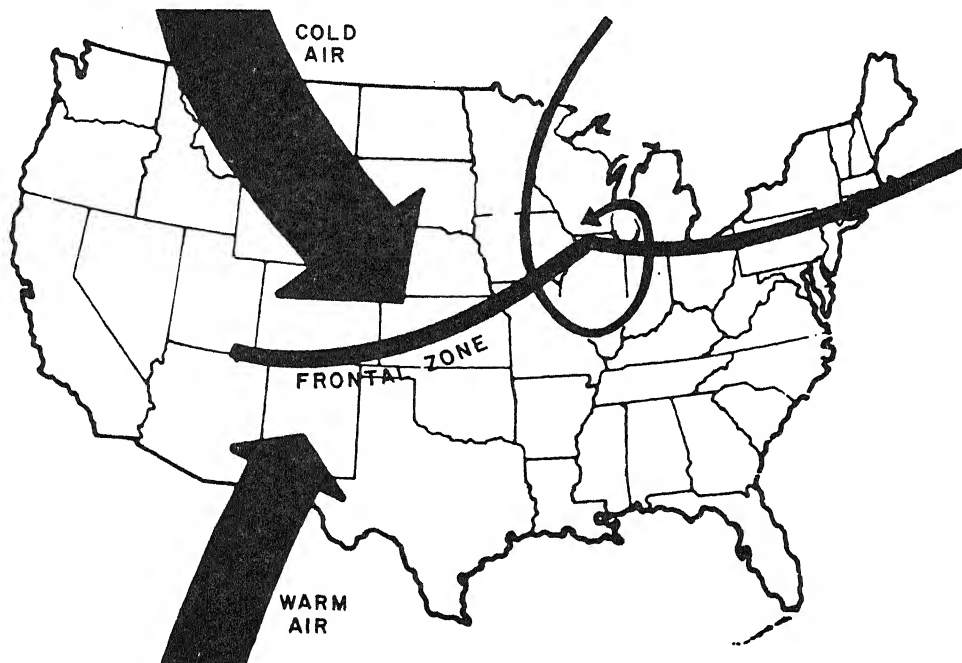

Your answer should look like this.



---

62

What is the direction of air flow around a low pressure center?

.....

---

Counterclockwise.

---

63

What is a frontal zone?


.....

---

The zone of contact between two air masses.

---

The Federal Meteorological Handbook No. 1. (FMH No. 1) is the handbook of uniform instructions for weather observing and reporting. This handbook provides the framework for identifying and reporting meteorological conditions in a standard format.

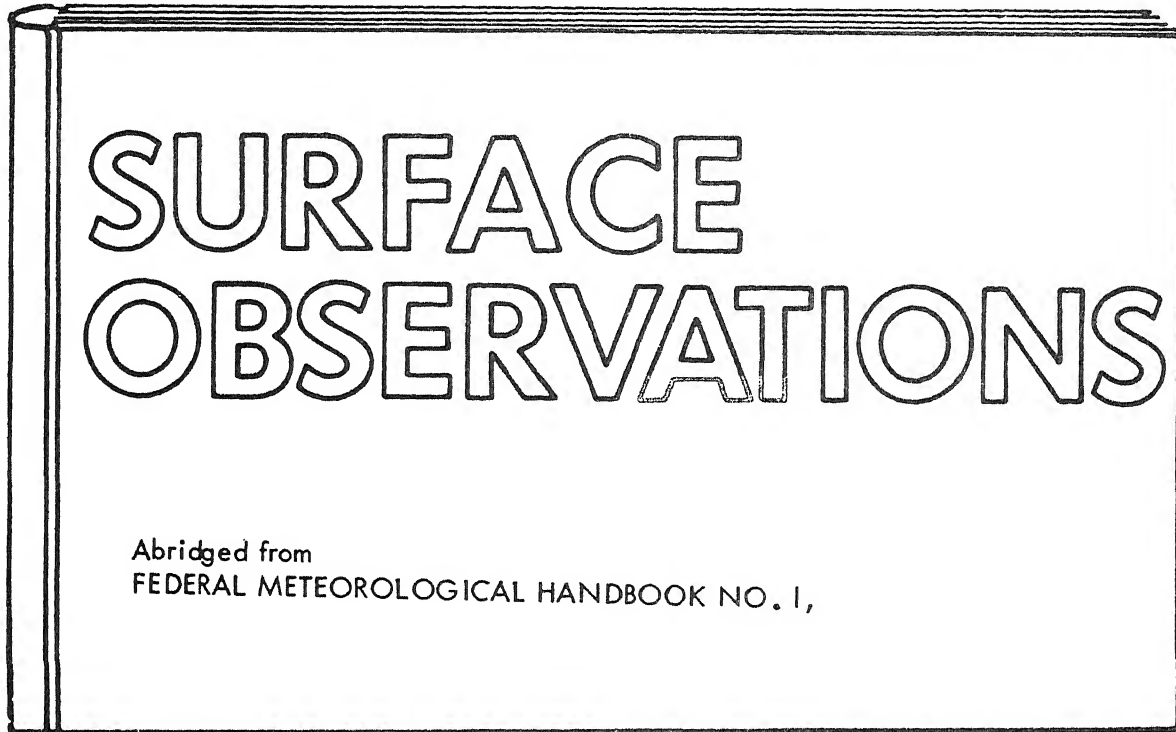

Select from the following reasons why a standard format is desirable.

- ..... A. Rapid transmission.
- ..... B. Rapid coding.
- ..... C. Easy interpretation.

---

A.

B.

C.

---



## SECTION 3

### NAVAIDS

---


65

As mentioned earlier, a vital part of the National Airspace System involves the use of navigational aids. These electronic aids are used by pilots to navigate from point to point and to make landing approaches at airports during IFR conditions. A fundamental knowledge of the various types of navigational aids will help you to provide better service to the flying public.

---

66


There are three types of facilities which provide air traffic service. They are Air Route Traffic Control Centers (ARTCC), Airport Traffic Towers (ATCT), and Flight Service Stations (FSS).

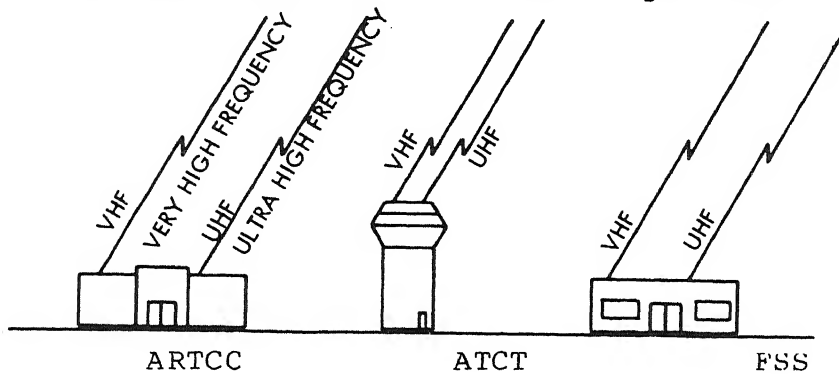

Each of these facilities use two types of radio frequencies to communicate with aircraft. (1) Very High Frequency (VHF), (2) Ultra High Frequency (UHF).

67

Civil aircraft use VHF radio equipment. Military aircraft primarily use UHF; however, some have both UHF and VHF.

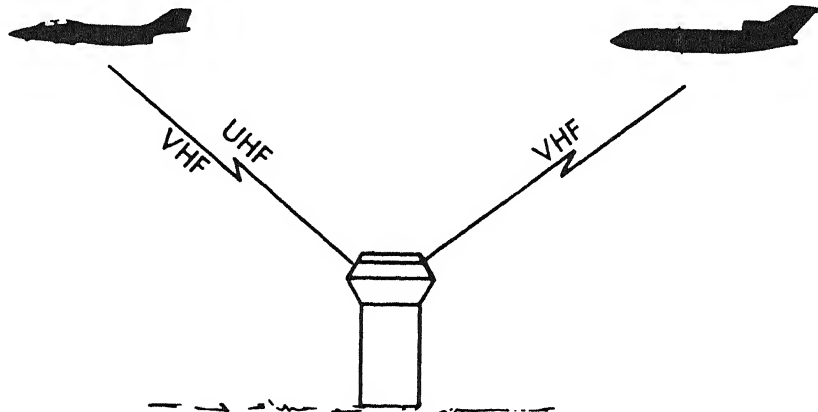

What are two bands of radio frequencies used in the air traffic system?

.....  
 .....

UHF

VHF

---

68

What do VHF and UHF mean?

.....

.....

---

Very High Frequency

Ultra High Frequency

---

69

Which frequency band would an air traffic specialist use to transmit an advisory message to most military aircraft?


.....

---

UHF

---

The VHF Omni-directional Radio Range (VOR) transmits radio signals (azimuth) called radials. There are 360 radials extending outward from a VOR like spokes on a wheel.

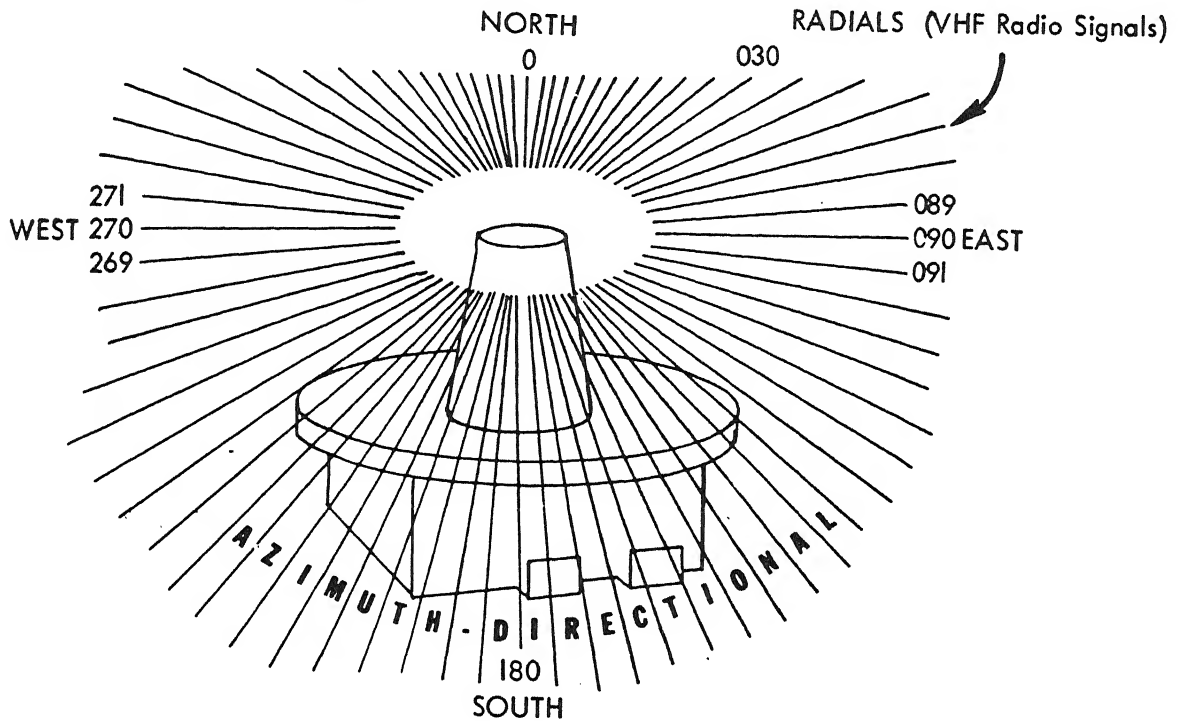

What are radio signals transmitted by a VOR called?

.....


Radials.

How many radials are transmitted by a VOR?

.....

360

The purpose of the VOR is to provide a simple and accurate means of navigation. They are spaced about 80 miles apart because an aircraft flying at the Minimum Enroute Altitude (MEA) can only receive a VOR for about 40 miles; then the pilot must change his VOR receiver in the aircraft in order to navigate to the next VOR. Scan the diagram below.

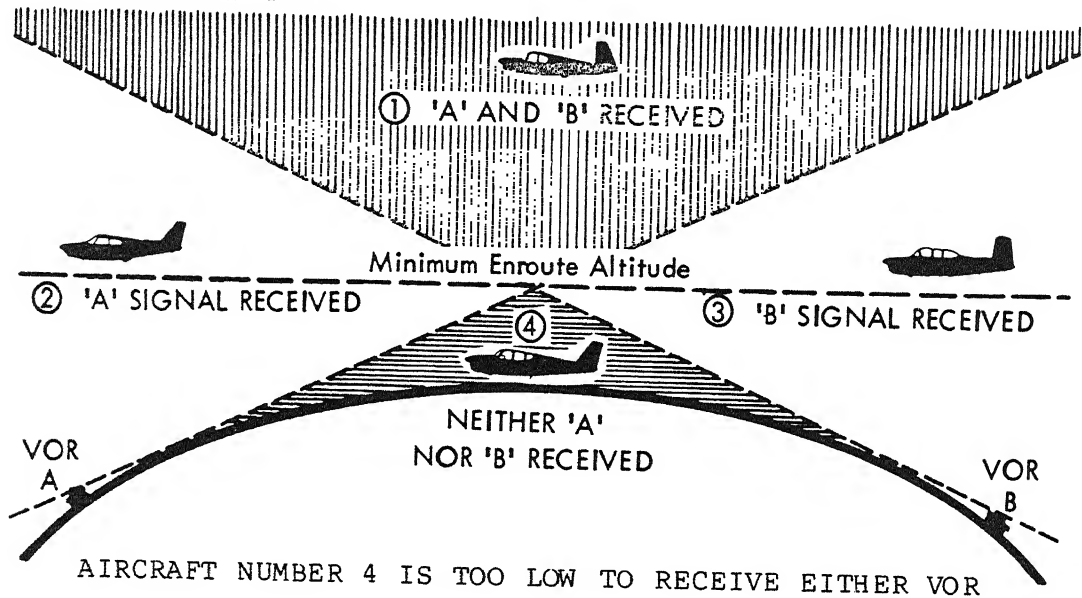

What does MEA mean?

.....

Minimum Enroute Altitude

73


Which aircraft is flying below the MEA and cannot use VOR navigation? Refer to frame 72.

.....

Aircraft number 4.

74

TACTical Air Navigation (TACAN) is the UHF omni-directional radio range. These are located at most military installations. Scan the diagram below:

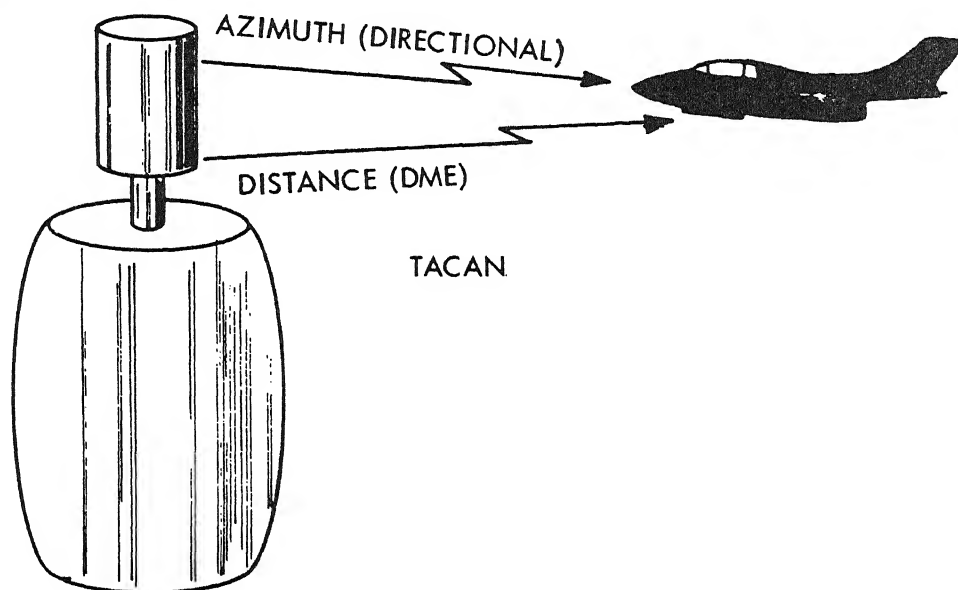

Distance Measuring Equipment (DME) provides distance (miles) from the navigational aid (TACAN) to the aircraft. A signal is transmitted by the DME in the UHF spectrum (wave lengths).

75

What does DME mean?

.....

-----

Distance Measuring Equipment

76

A TACAN provides what kind of information?

.....

-----

Direction and distance.

77

What information is provided by TACAN that is not provided by VOR?

.....

Distance

78

Which can a pilot navigate on when flying an aircraft equipped with VHF?

..... A. TACAN

..... B. VOR

B.

79

Which of the following is normally equipped to use TACAN?

..... A. Air Carriers


..... B. Military


..... C. General Aviation

B.

80

A VORTAC is a navigational aid which has VOR and TACAN located at the same site.

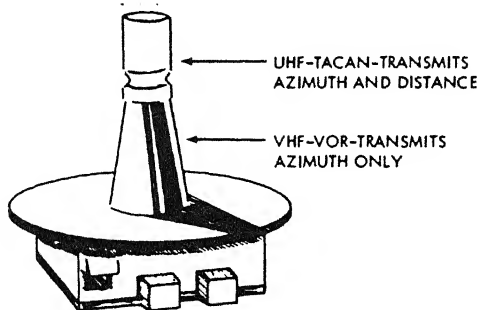

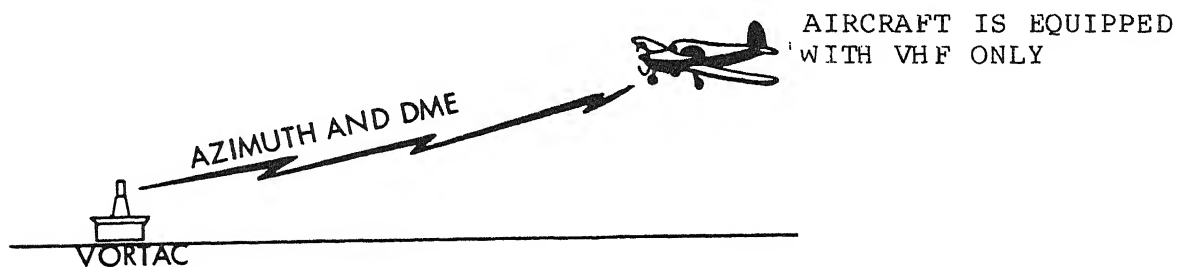

What information can the above aircraft receive from a VORTAC?

- ..... A. Azimuth
- ..... B. DME

-----

A.

82

A military aircraft equipped with a TACAN receiver can receive which of the following from a VORTAC?

- ..... A. Azimuth and DME
- ..... B. Azimuth only
- ..... C. DME only

-----

A.

83

If an aircraft is at the MEA, what is the approximate reception distance from a VOR/VORTAC/TACAN?

- ..... A. 49
- ..... B. 29
- ..... C. 39

-----

C.




84

A homing facility, better known as a radio beacon, is used in the vicinity of an airport as an approach aid. The radiated pattern is circular, i.e., nondirectional, being similar to the pattern produced by a commercial radio station. The radio beacon does not provide radials like a VOR, VORTAC, and TACAN. It is a different type of navigational aid.


85

Pilots must have some means of getting from the en route course to the instrument landing system serving the airport. A pilot will home in on i.e., fly toward the radio beacon which is located near the airport.

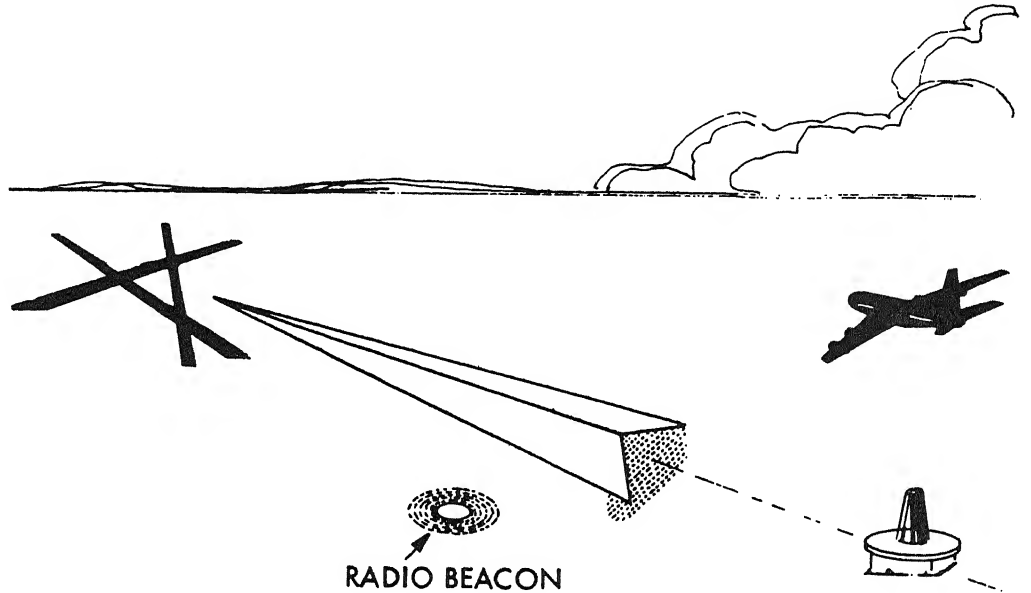

86

These radio beacons are normally associated with the airport landing system.

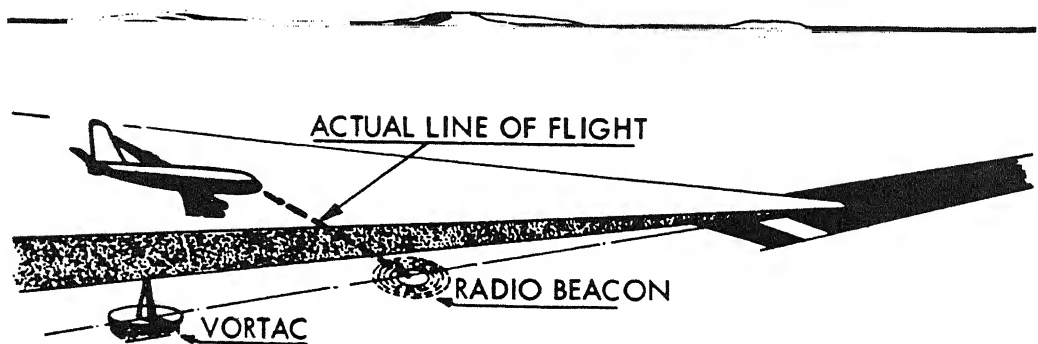

The only information received is a straight course to or from the station.


87 What type of pattern is radiated by the radio beacon?  
.....

Circular or nondirectional

88 A pilot uses what kind of navigational aid to fly from a VOR/VORTAC to the airport?  
.....

Radio beacon


89 The Instrument Landing System (ILS) is the most widely used landing system in operation today. Scan diagram below:

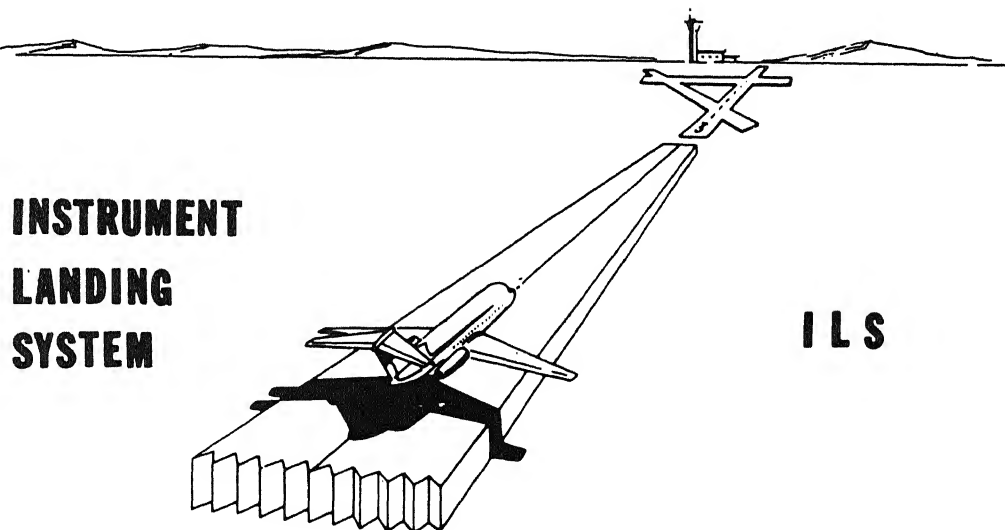

What three words come to mind when you hear ILS?  
.....

Instrument Landing System

This approach aid (ILS) provides the pilot with azimuth (direction), elevation (height), and range (distance) through the use of navigational equipment in the aircraft. An aircraft with ILS receiver equipment can make an approach to an airport by reference to these instruments. Study this diagram.

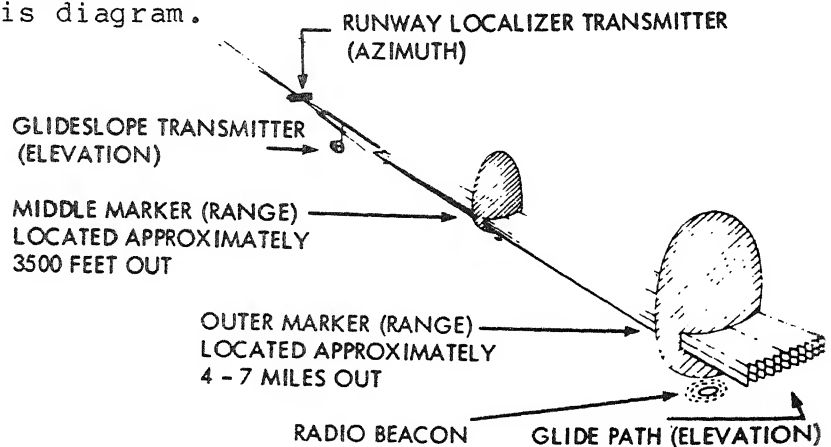

The ILS system has three primary elements: (1) localizer, (2) glide path, (3) and markers. The glideslope produces the glide path, which is elevation. Normally the radio beacon and the markers are located at the same site, however, these are two completely different aids. When the aircraft passes over the outer and middle markers, the pilot receives a flashing light.

91

What is the purpose of the ILS?

.....

To aid the pilot in making an approach to the runway.

92

Which of the following components of an ILS designed is to provide the pilot with directional (azimuth) guidance to the runway? Refer to frame 90.

- ..... A. Markers
- ..... B. Radio Beacons
- ..... C. Glide Path
- ..... D. Localizer

D. (This informs the pilot to turn right or left in order to remain on course.)

---

93

What piece of equipment produces the glide path (elevation)? Refer to frame 90.

.....

---

Glideslope transmitter. (This informs the pilot to climb or descend in order to stay on the glide path.)

---

94

What is the purpose of the ILS middle and outer markers?

.....

---

Informs the pilot of his distance from the landing runway.

---

95

Which of the following aids can a pilot tune in to fly from a VOR/VORTAC to the ILS?

..... A. Localizer

..... B. Glide path

..... C. Radio beacon

---

C.

---

96

Name the three basic components of the ILS.

.....

.....

.....

---

Localizer

Glide Path

Markers

---

## SECTION 4

### AERONAUTICAL CHARTS

---

97

Aeronautical charts are maps which are used extensively by pilots as well as controllers. They are one of the main tools made available to the controller for the movement of air traffic. They are designed for use which involves the application of VFR and IFR. Charts show the pilot and the air traffic specialist the location of navigational aids, airport, terrain, controlled and uncontrolled airspace. A knowledge of their use and limitations is necessary to become a proficient Air Traffic Control Specialist.

---

---

98

You must be able to interpret and use the following four charts:

- (1) Sectional Aeronautical Chart for VFR flights.
- (2) En route Low Altitude Chart for IFR flights.
- (3) En Route High Altitude Chart for IFR flights.
- (4) Approach and Landing Chart.


---

99

The Sectional Aeronautical Chart is used by the pilot who flies VFR.



A sectional chart shows features on the ground which the pilot can recognize and use to assist him in navigation. Examples are rivers, highways, railroad tracks, and towers (radio stations). Below is an example of this chart:

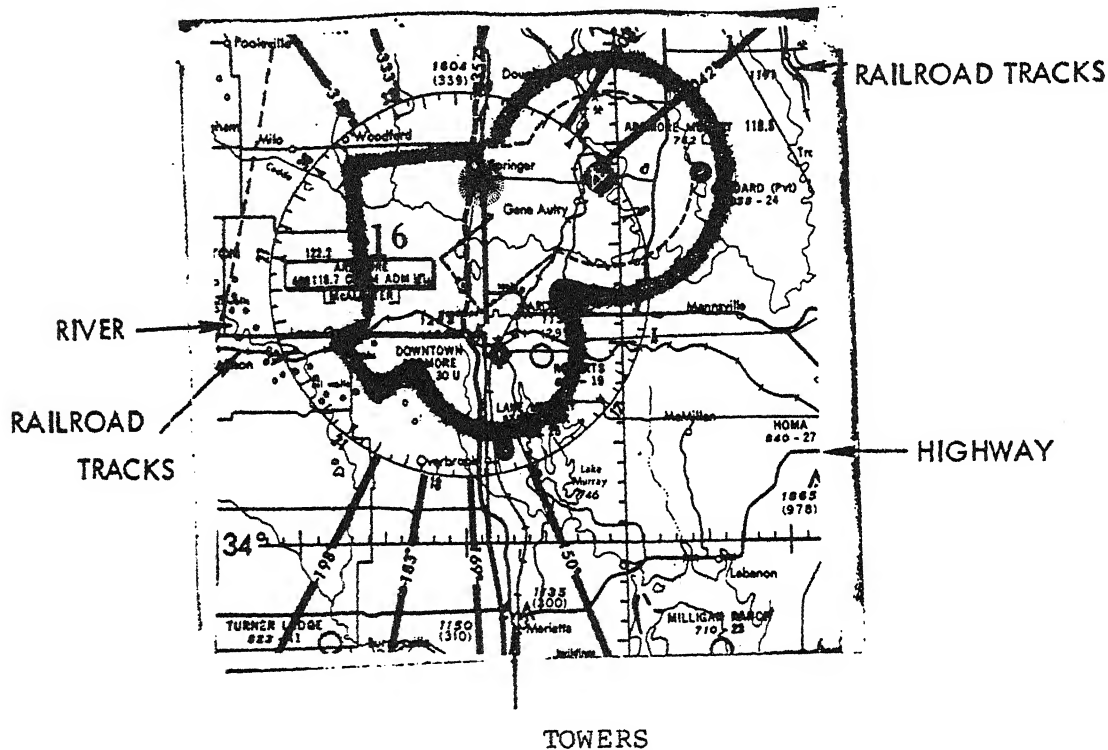

What are some of the major landmarks found on a sectional chart which can be used as navigational aids?

.....

Rivers

Railroad tracks

Highways

Towers

The following example is the front of a sectional chart. Scan and study the dates; they are important.

## DALLAS - FT WORTH SECTIONAL AERONAUTICAL CHART SCALE 1:500,000

Lambert Conformal Conic Projection Standard Parallels 33°20' and 38°40'

Topographic data corrected to April 1976

**16<sup>TH</sup> EDITION July 15, 1976**

Includes airspace amendments effective July 15, 1976

and all other aeronautical data received by May 27, 1976

Consult appropriate NOTAMS and Flight Information


Publications for supplemental data and current information.

This chart will become **OBSOLETE FOR USE IN NAVIGATION** upon publication of  
the next edition scheduled for **JANUARY 27, 1977**

PUBLISHED IN ACCORDANCE WITH INTER-AGENCY AIR CARTOGRAPHIC COMMITTEE

SPECIFICATIONS AND AGREEMENTS APPROVED BY:

DEPARTMENT OF DEFENSE \* FEDERAL AVIATION ADMINISTRATION \* DEPARTMENT OF COMMERCE

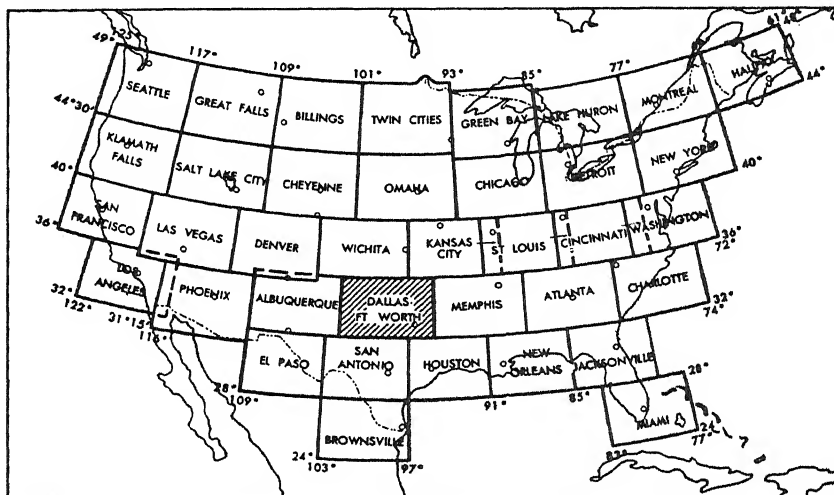

When will the above Dallas-Ft. Worth sectional chart become obsolete?

.....

January 27, 1977




This page is the back cover of the Dallas-Ft. Worth Sectional Chart. Scan this legend of symbols which can be found on the inside of this chart.


## DALLAS - FT WORTH

### AERONAUTICAL SYMBOLS AERODROMES

#### AERODROMES WITH FACILITIES



#### AERODROMES WITH EMERGENCY OR NO FACILITIES



Aerodromes within United States having traffic areas or FSS advisory service are shown in blue, all others in magenta. All recognizable runways, including some which may be closed, are shown for visual identification.

#### AERODROME DATA

CT - 118.3	Control Tower and primary frequency	INTL CT - 118.3	03 Elevation in feet
NFCT - 118.3	Non-Federal Control Tower and primary frequency	ATIS 124.8	L Lighting (see below)
ATIS 124.8	Automatic Terminal Information Service	03 L 92 U-2	92 Length of longest runway in hundreds of feet
		Airport of entry	S Non-sally sheltered take-off area

U-1: Indicates aeronautical advisory station licensed to operate on 122.8; U-2 on 123.0; U-3 on 123.05; U-4 on 122.85; U-5 on 122.95


L - Lighting in operation Sunset to Sunrise

\*L - Lighting available Sunset to Sunrise only on request (by radio call, letter, phone, telegram).


(L) - Lighting in operation part of the night and on request, or not operating thereafter.

When facility or information is lacking, the respective character is replaced by a dash.


#### RADIO AIDS TO NAVIGATION AND COMMUNICATION BOXES

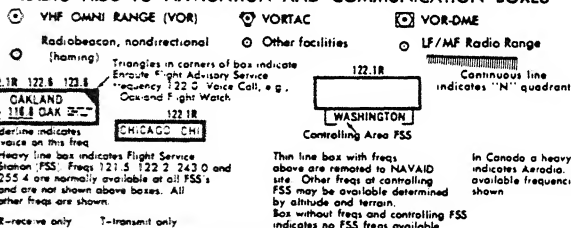


#### AIRSPACE INFORMATION

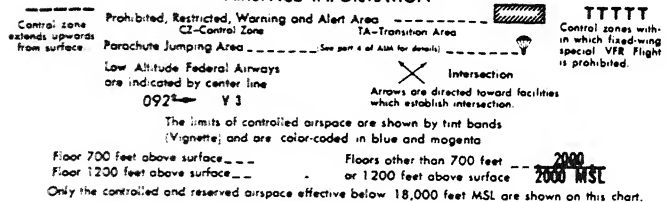

#### OBSTRUCTIONS



#### MISCELLANEOUS



---

103

What chart does a pilot use to fly VFR?

.....

---

Sectional chart

---

104

Why is the sectional chart an ideal aid for the pilot who flies under Visual Flight Rules?

.....

---

It identifies landmarks which can be seen by the pilot.

---

105

Which of the following can be found on a sectional chart? Refer to frame 102.

- ..... A. Aerodromes (airports)
- ..... B. Aerodrome (airport) data
- ..... C. Radio aids to navigation
- ..... D. Airspace information
- ..... E. All of the above

---


E.

---


Normally IFR pilots cannot see one another, nor can they always see the ground. This is the reason for omitting topographical details (cities and towns, railroad tracks, highways, and etc.) from the enroute low and high altitude charts. Scan diagram below:



Below is an example of the front of an IFR low altitude chart. Enroute low altitude charts are used for IFR flights up to but not including flight level (FL) 180 (18,000 feet). Scan.

**L-14**  
1"=12 NM

**UNITED STATES GOVERNMENT  
FLIGHT INFORMATION PUBLICATION  
ENROUTE LOW ALTITUDE - U. S.**  
For use up to but not including 18,000' MSL  
**EFFECTIVE 0901Z 15 JUL 1976  
TO 0901Z 9 SEP 1976**  
PUBLISHED IN ACCORDANCE WITH INTER AGENCY AIR CARTOGRAPHIC COMMITTEE  
SPECIFICATIONS AND AGREEMENTS, APPROVED BY  
DEPARTMENT OF DEFENSE • FEDERAL AVIATION ADMINISTRATION • DEPARTMENT OF COMMERCE

**L-13**  
1"=12 NM

The low altitude charts have an alphabetical listing of all civil airports in the chart area, with the radio frequencies for each.

A/G VOICE COMMUNICATIONS			
Civil airports with terminal A/G communications are listed below, alphabetically by airport name. Airports with proper names are listed by last name. Airports located within the limits of the Area Charts are listed on the Area Chart. Frequencies transmit and receive unless otherwise noted. An asterisk (*) follows the part-time tower freq remoted to the collocated full-time FSS for use as AAS during hours the tower is closed. Radials defining sectors are outbound from facility. Chart panel identification letter is shown to right of listing. For additional communications data, refer to AIM.			
<b>ABILENE, Tex.</b>	App Con—126.5 134.1		<b>B</b>
Twr—120.1*	Gnd Con—121.9	Dep Con—125.0	
<b>ADAMS, Ark.</b>	ATIS *125.6		<b>E</b>
Little Rock App Con—124.2 (041°-220°)	119.5 (221°-040°)		
118.1 113.9T			
Twr—118.7 126.2 123.85	Gnd Con—121.9		
Little Rock Dep Con—124.2 (041°-220°)			
119.5 (221°-040°) 118.1			
<b>ADDISON</b>	ATIS *111.4		<b>C</b>
Regional App and Dep Con—124.5 125.2	Twr—121.1		
Gnd Con—121.6			
<b>ALMYRA</b>			<b>F</b>
Pine Bluff App and Dep Con—118.4 (1200-0400Z)			
Memphis Center App and Dep Con—127.2 (0400-1200Z)			
<b>MEMORIAL</b>			<b>E</b>
Hot Springs App Con—118.85 (1200-0400Z)			
Memphis Center App Con—132.3 (0400-1200Z)			
Hot Springs Twr—120.3	Gnd Con—121.7		
<b>MEMPHIS INTL</b>	ATIS 121.0		<b>F</b>
App Con—119.1 (174°-353°) 125.8 (354°-173°)	126.7		
Twr—118.3 119.7	Gnd Con—121.9 121.65		
Dep Con—124.65 (174°-353°) 124.15 (354°-173°)			
Cinc Del—125.2	VOT 111.0		
<b>MIDLAND</b>	App and Dep Con—119.15		<b>A</b>
<b>MIDLAND REGIONAL AIR TERMINAL</b>	ATIS *126.8		
Midland App and Dep Con—121.1 (161°-009°)			
119.15 (010°-160°)			
Midland Twr—118.7	Gnd Con—121.9		

What is the radio frequency for Abilene Tower (Twr)?

.....

120.1

109


Low altitude charts are used for aircraft flying up to what altitude?

.....

Up to but not including FL 180.

110

Enroute low altitude charts are identified by the letter "L" followed by a number. The chart below is the L-13/L-14 chart, as indicated by the heavily-lined boxes.

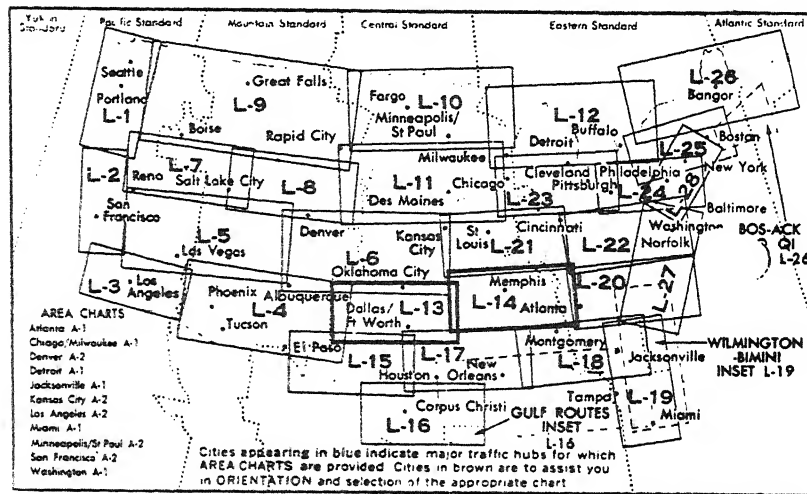

If a pilot wishes to fly IFR to Seattle, which low altitude chart would he need?

.....

L-1

The following symbols are on the inside of a low altitude chart. Scan the legend on this page.


**L-13**  
PANELS  
ABCD  
1"=12 NM

UNITED STATES GOVERNMENT  
FLIGHT INFORMATION PUBLICATION

**ENROUTE LOW ALTITUDE - U. S.**

For use up to but not including 18,000' MSL

**L-14**  
PANELS  
EFGH  
1"=12 NM

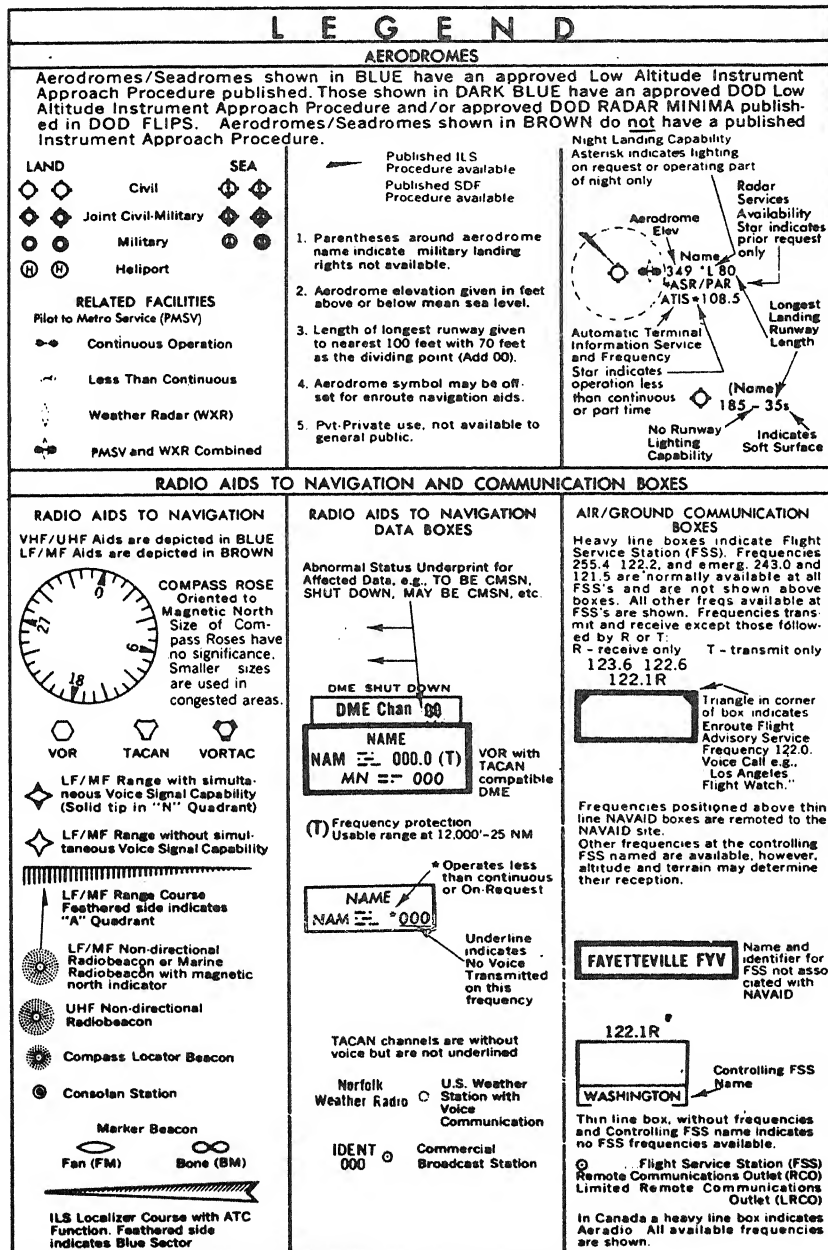

**AIRWAY AND ROUTE DATA**

VHF/UHF Data is depicted in BLUE; LF/MF depicted in BROWN

V4 VOR Airway and Identification

G3 LF/MF Airway and Identification

A RTE 10 Uncontrolled LF/MF Airway

BR 37V VHF/UHF Bahama Route and Identification

BR 10L LF/MF Bahama Route and Identification

A15 ROUTE LF/MF Oceanic Route and Identification

Military IFR Route

Flight Planning Route

Substitute Route Structure (See NOTAMS for facility outages)

All relative and supporting data shown in brown

Unusable or Closed Segment

NME 000.0 Facility Locator used with Radial Line in the formation of a Reporting Point

AME 000 Facility Locator used with Bearing Line in the formation of a Reporting Point

**AIRSPACE SERVICES AND AIRSPACE INFORMATION**

036 Bearing Inbound to a UHF/VHF Radio Aid

036 Bearing Inbound to a LF/MF Radio Aid

123 Total Mileage between Compulsory Reporting Points and/or Radio Aids

23 Mileage between other Reporting Points, Radio Aids, and/or Mileage Breakdown

42 VOR Changeover Point Giving Mileage to Radio Aids (Not shown at mid-point locations)

26 Mileage breakdown

X X Denotes DME fix (Distance same as route mileage)

19 Denotes DME fix (Encircled mileage shown when not otherwise obvious)

MAA-15500 MAA (Maximum Authorized Altitude)

3500 MEA (Minimum Enroute Altitude)

3500 MOCA (Minimum Obstruction Clearance Altitude)

+3000 Canada only - Direction of Flight indicator (Shown when exception to Cruising Alt. Diagram)

EVEN MEA, MAA and/or MOCA Change at other than Radio Aids to Navigation

MRA (Minimum Restriction Altitude)

MCA (Minimum Crossing Altitude)

**REPORTING POINTS**

▲ Compulsory Reporting Point

△ Non Compulsory Reporting Point

Offset Arrows Indicate Facility Forming a Reporting Point Toward LF/MF. Away from VHF/UHF

**BOUNDARIES**

A Altimeter Setting Change

Altimeter Setting Change when not otherwise defined

Air Route Traffic Control Center (ARTCC)

NAME Name 134 3 269 5

ARTCC Remoted Sites with Discrete VHF and UHF Frequ.

T Flight Information Region (FIR)

△ Air Defense Identification Zone (ADIZ)

Combined FIR and ADIZ

Control Area (CTA)

Control Zone

Canadian Positive Control Zone

Control Zones within which fixed wing special VFR flight is prohibited

(Omitted when coincident with ARTCC or FIR)

Area of Enlargement (Contains only data for through flights) See Area Charts for complete data

Official Time Zone

**AIRSPACE INFORMATION**

Open area (white) indicates controlled airspace

Shaded area (brown) indicates uncontrolled airspace up to 14,500'. THE BASE OF THE CONTINENTAL CONTROL AREA IS 14,500 FT MSL EXCLUDING THE AIRSPACE LESS THAN 1,500 FT ABOVE THE TERRAIN AND CERTAIN SPECIAL USE AIRSPACE AREAS.

**MISCELLANEOUS**

1970 Isogonic Line and Value

ALL MILEAGES ARE NAUTICAL EXCEPT AS NOTED

ALL RADIALS AND BEARINGS ARE MAGNETIC

ALL ALTITUDES ARE MSL UNLESS OTHERWISE STATED

ALL TIME IS GREENWICH MEAN (STANDARD) TIME (GMT)

DAYS ARE LOCAL

DURING PERIODS OF DAYLIGHT SAVING TIME (DT) EFFECTIVE HOURS WILL BE ONE HOUR EARLIER THAN SHOWN

ALL CONTERMINOUS STATES ON DT EXCEPT ARIZONA AND THAT PORTION OF INDIANA IN THE EASTERN TIME ZONE

**EXAMPLE OF GROUPING**

3500 MRA 13

3500 MRA 53

4000 MRA 18

MEGA GAP

Holding Pattern

NAME MRA 4000

MEGA-15500 4000 +3500

R-1234

NAME MCA 4000 SE

2000 3000 4000

21

49

Water Vignette

CONTROL 1150 above 2000 feet

**SPECIAL USE AIRSPACE**

SPECIAL USE AIRSPACE WILL INCLUDE:

① Area Identification: In Canada area ident is preceded by the letters CT (CANADA) followed by a number (PRO-VINCE).

② Effective Altitude ceilings are shown up to but not including 18,000'. When the airspace encompasses all altitudes in the low altitude structure, no altitude will be shown. The word "to" (an altitude means "to and including" (that altitude).

③ Operating Time: When continuous no time is shown.

Day: Sunrise to Sunset

Night: Sunset to Sunrise

Hours: Given in GMT, e.g. 0600-1300.

Non-Fix: Indicates area does not exist on Sat. or Sun.

1 Mar-15 June: Indicates area in use only through dates given.

By NOTAM: Area activated by NOTAM. Days are local.

④ Weather Conditions during which the area is in operation. When continuous no weather is shown.

VFR: Used only during VFR conditions.

IFR: Used only during IFR conditions.

⑤ Vence: Call of controlling Agency for enroute clearances through area. No A/G unless indicated.

† Indicates complete information in tabulation on front panel.

**TP-56**

W-123

A-123

PEESE

R 1234

TO 10,000

06:00-18:00

Line delimits altitude separation within same Special Use Airspace Area

P - Prohibited Area

R - Restricted Area

W - Warning Area

D - Danger Area (Canada)

A - Alert Area

S - Alert Student Jet Training Area

---

113

Why are highways and rivers not shown on charts used for IFR flights?

.....

---

When flying under IFR conditions, these landmarks may not be seen.

---

114

Which of the following can be found on an enroute low altitude chart? Refer to frames 111 and 112.

- ..... A. Aerodromes (airports)
- ..... B. Highways
- ..... C. Radio Aids to Navigation (VORs, TACAN and VORTACs)
- ..... D. Rivers
- ..... E. Airways and Route Data

---

A.

C.

E.

---

115

Study frame 111, then write the names of the three VHF/UHF radio aids which are used in navigation today.

.....

.....

.....

---

VOR

TACAN


VORTAC

---




116


The following is a diagram of symbols used to identify these aids.



VOR




VORTAC



TACAN

117

What kind of navigational aid is shown below refer to frame 111.




.....

VOR, (the hexagon figure (six sides) in the middle of the circle represents a VOR.)

118

Is the following VOR a compulsory or non-compulsory reporting point? Refer to frame 112, column 3.




.....

Noncompulsory (the triangle inside the hexagon figure is white, not shaded).

119

Is the following VOR a compulsory or noncompulsory reporting point?  
Refer to frame 112, column 3.




.....


Compulsory (the shaded triangle represents a compulsory reporting point).

120


Which of the following navigational aids is a VORTAC? Refer to frame 111.



A.



B.



C.

.....

C.

121


How many radio beacons are there in frame 120?

.....


Two, in figure B.

122

Which of the following VORTACs is a noncompulsory reporting point?



A.



B.

.....

B

123

Refer to frame 112, The Air Traffic Services and Airspace Information portion of the legend, and write the name of the VOR airway listed under airway and route data.

.....

V4 (Victor Four)

124


Refer to frame 112, column 2. What is the MEA?

.....

3500 - MEA

125

VOR airways are predicated solely on VOR/VORTAC navigation aids. Any radial may be used to make up an airway. VOR airways are identified on aeronautical charts by a "V" followed by a number. See example below:

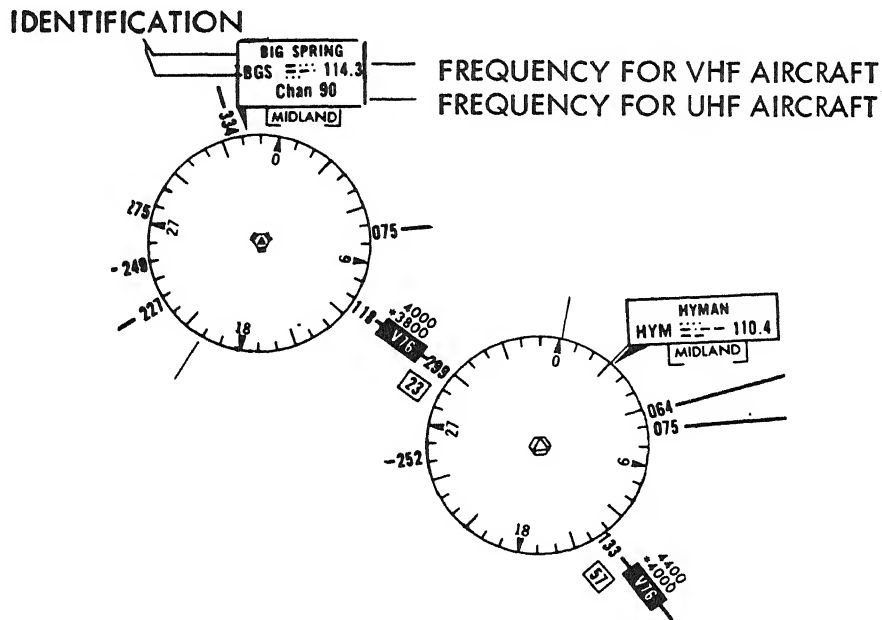

The data box above the Big Spring VORTAC contains information concerning this aid: (1) identification - Big Spring (three letter code - BGS), (2) VOR frequency for VHF aircraft - 114.3, (3) and the VORTAC frequency for UHF aircraft - channel 90.

126

What is the airway number and total mileage between Big Springs and Hyman? Refer to frame 125.

.....

.....

V76

| 23 |

---

127

What radials make up V76 between Big Springs and Hyman VOR? Ref  
to frame 125.

.....

.....

---

Big Springs 118 radial

Hyman 299 radial

---

128

What is the identifier of the Hyman VOR and its frequency? Refer  
to frame 125.

.....

.....

---

HYM

110.4

---

129

What is the MEA between BGS and HYM? Refer to frame 125.


.....

---

4000

---

Enroute high altitude charts are used to fly from FL 180 up to FL 450. Only radials from VORTACs are used to establish jet routes. These routes are identified on an aeronautical chart by a "J" followed by a number. Some airways and jet route segments have more than one number assigned to them.

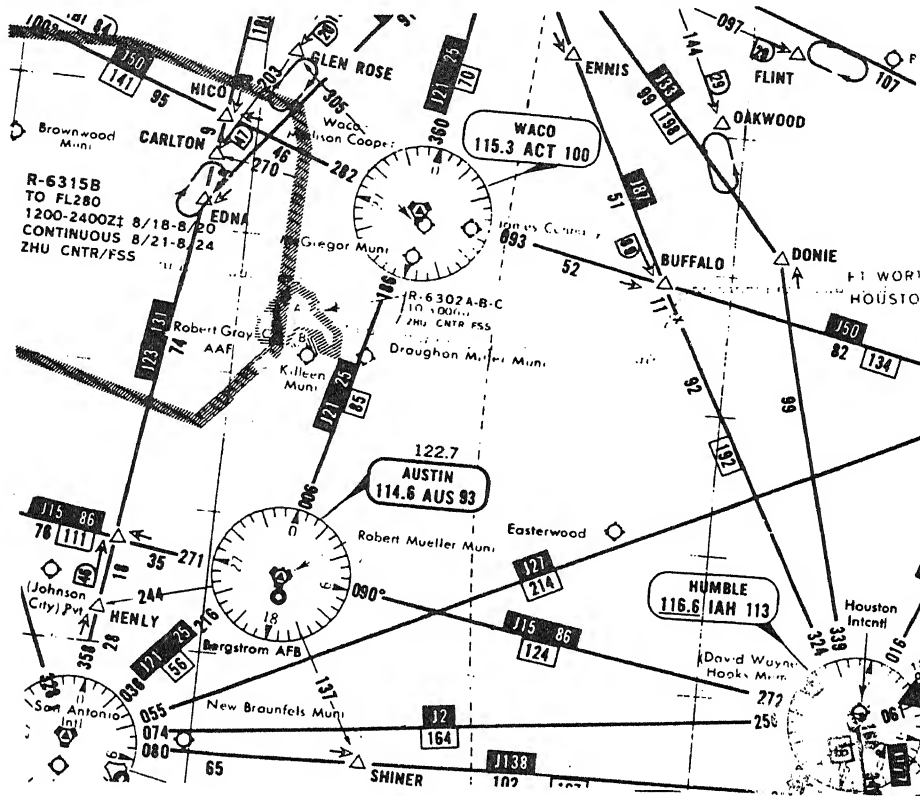

What are the numbers of the jet routes between ACT and AUS?

.....

J21 and J25

Jet routes are used between what altitudes?

• • • • •

FL 180 to FL 450

---

132

What are the identifications of the VORTACs depicted in frame 130?


.....

---


Waco (ACT), Austin (AUS), and Humble (IAH), Texas. All  
navigational aids depicted on a high altitude chart are VORTACs.

---

Identify the following two charts.

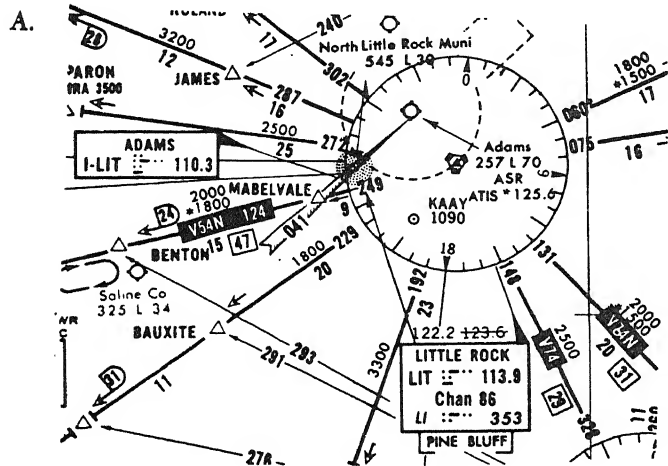

B.

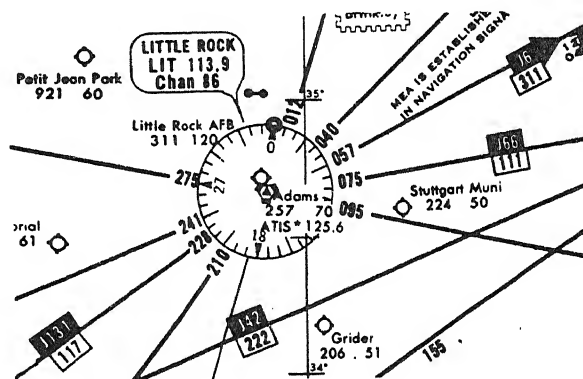

..... A.


..... B.

Enroute low altitude A.

Enroute high altitude B.



Uncontrolled airspace is depicted as a shaded area on enroute low altitude charts.

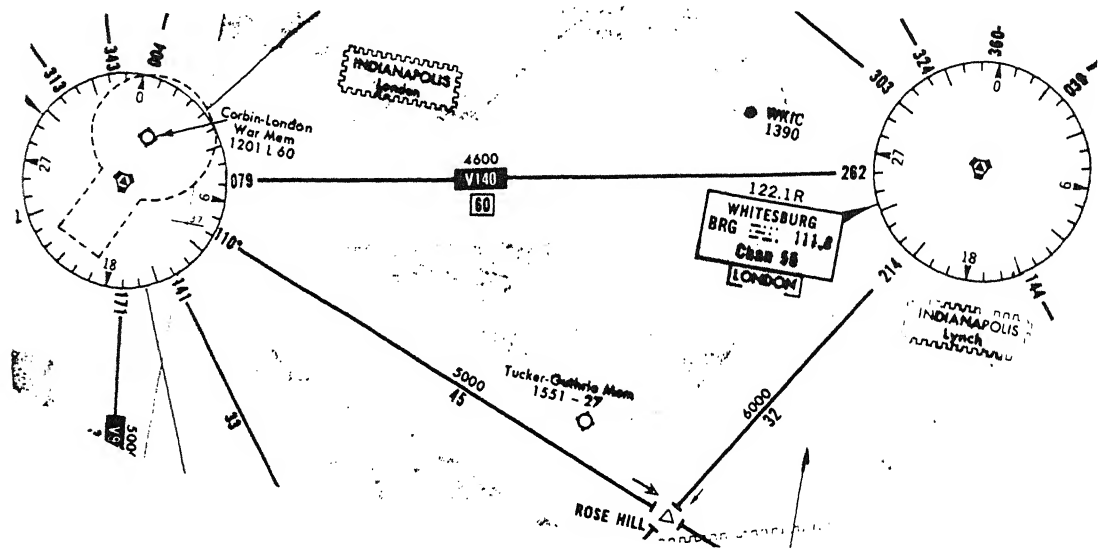


Refer to the above illustration. Is radio station WKIC located in controlled or uncontrolled airspace?

- ..... A. Controlled.
- ..... B. Uncontrolled.

B.

There are prohibited, restricted, and warning areas established and charted to further aviation safety. These areas are indicated on aeronautical charts. Air traffic for all practical purposes is not permitted in a prohibited area. A letter "P" followed by a number identifies prohibited areas.

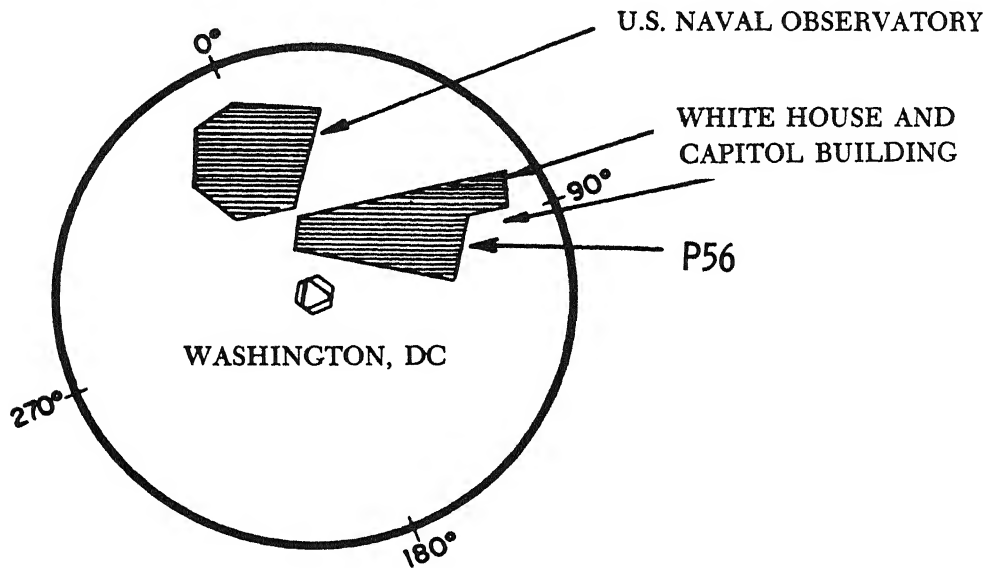

In regard to a prohibited area, a pilot must do what, when planning his flight plan?


.....

---

Remain clear of all prohibited areas.

---

A restricted area is an airspace of defined dimensions on the surface of the earth where activities of a hazardous nature take place. No person may operate an aircraft within these areas without prior permission from the controlling agency. These areas, such as aerial gunnery and bombing ranges, are indicated on a chart by the letter "R", followed by a number. See example below:

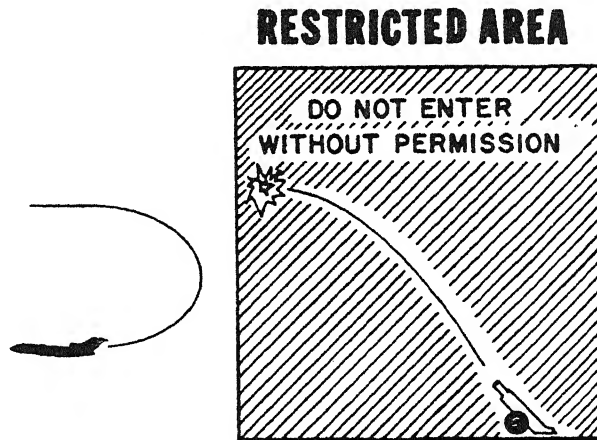

Who has the authority to grant permission to fly through a restricted area?


.....

---

The controlling agency.

---

A warning area is established to inform pilots that activities may be in progress which require them to be constantly alert. Aircraft operating in a warning area are not being controlled by any agency. These areas are indicated on the chart by a letter "W" followed by a number. See example below:

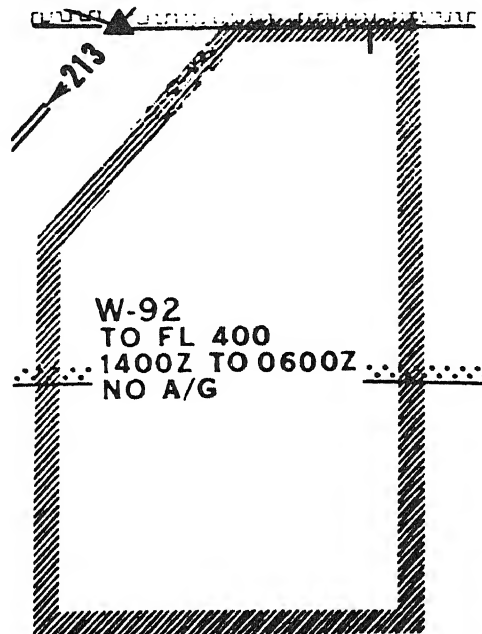

What is the identification of the warning area pictured above?

.....

W-92

Match the following areas with the letter as they are indicated on an aeronautical chart.

..... A. Warning Area

A




..... B. Prohibited Area

B



..... C. Restricted Area

C




C A.

A B.

B C.

139

Approach and Landing (AL) Charts specify details of the procedures to be used in making an instrument approach under IFR conditions. See example below:

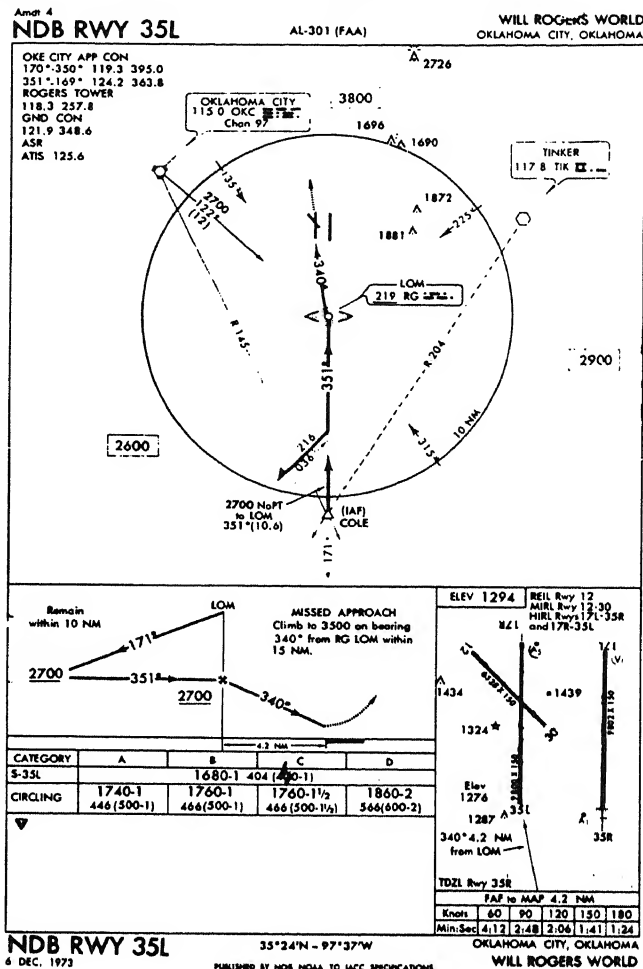

Among the information shown in a detailed sketch of the approach (located in the middle of the circle), airport (located in the lower right hand corner), and frequencies which are available (located in the upper left hand corner).

140

How many frequencies are there available to call Oklahoma City Approach Control? Refer to frame 139.

.....

## Four

---

141

What is the name of the airport at Oklahoma City, Oklahoma? Refer to frame 139.

.....

---

Will Rogers World

---

142

The Office of Aeronautical Charting and Photography has the responsibility to draw and print aeronautical maps and charts according to FAA specifications. These aeronautical maps and charts are updated periodically and are distributed nationwide. The remaining components of NOAA are: Environmental Data Services, National Environmental Satellite Service, and Environmental Research Laboratories. Each in its way supports the aviation industry.

Who prepares the FAA aeronautical maps and charts?

.....

---

Office of Aeronautical Charting and Photography

---

143

How does the agency obtain its supply of updated aeronautical maps and charts?

.....

---

They are automatically distributed.

---

144

These charts are always available to the controller. During your career with the FAA, you will be called upon to read these charts. If you do not know what a symbol or letter means when reading a chart, look it up. A pilot's life may depend on it.

---

SECTION 5  
TELECOMMUNICATIONS SYSTEMS

---


145

A method is needed for the rapid dissemination of information vital to the air traffic system. There are several methods used, some of which will be discussed in this section.

---



The FAA has a teletypewriter system which is used as a method for the exchange of messages. These teletypewriter messages contain information of importance to the Air Traffic Control Specialist.

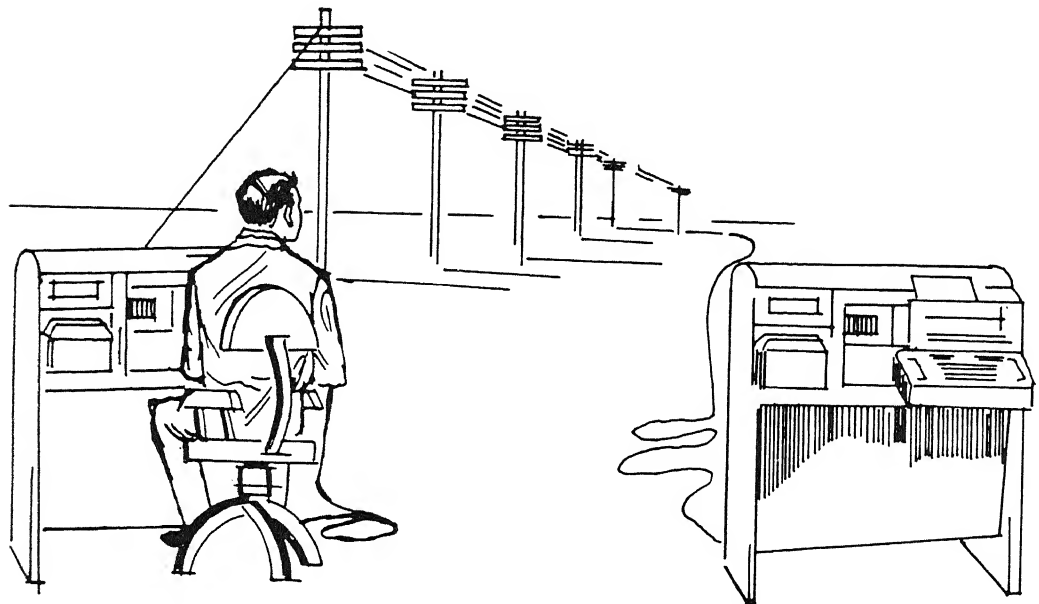

SEND AND RECEIVE

SEND AND RECEIVE

### TELETYPEWRITER SYSTEM

Radio and telephones are means of exchanging communication messages. What other system does the Air Traffic Control Specialist use to exchange information?


.....

---

The teletypewriter system

---

The illustration below indicates the types of information transmitted over the teletypewriter system.

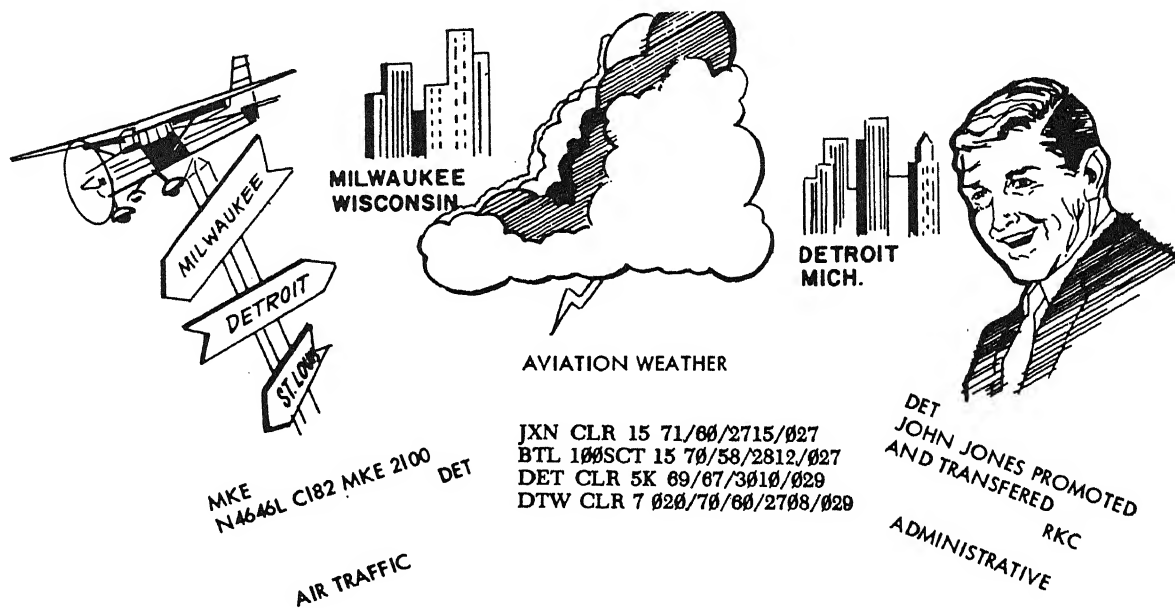

Which of the following types of information are transmitted on FAA teletypewriter systems?

- ..... A. Severe weather conditions between Milwaukee, Wisconsin and Detroit, Michigan.
- ..... B. Information concerning an Air Traffic Control Specialist's promotion and transfer.
- ..... C. A flight plan message on an aircraft flying between Detroit, Michigan and Milwaukee, Wisconsin.

A.

B.

C.

148

Refer to the question in frame 145, classify the types of messages as weather, air traffic, or administrative.

..... A.

..... B.

..... C.

---


Weather A.

Administrative B.

Air traffic C.

---

There is a large volume of teletypewriter messages generated in the Air Traffic Control System. The teletypewriter system would be overloaded if there were only one teletypewriter line to transmit and receive this volume.

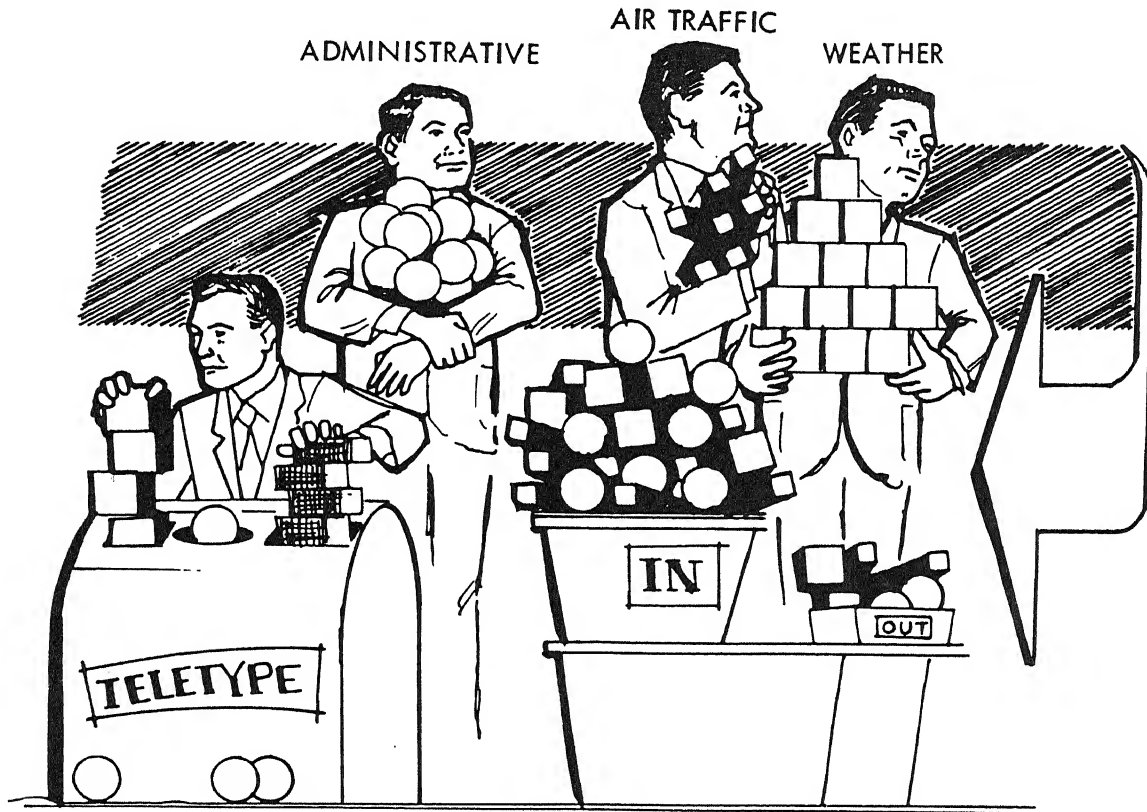


What would you do to eliminate the bottleneck in the above illustration?

You may decide to use two or more teletypewriter lines to speed up the communication process by separating the different types of messages.

150

The FAA eliminated the bottleneck by developing separate teletypewriter networks.

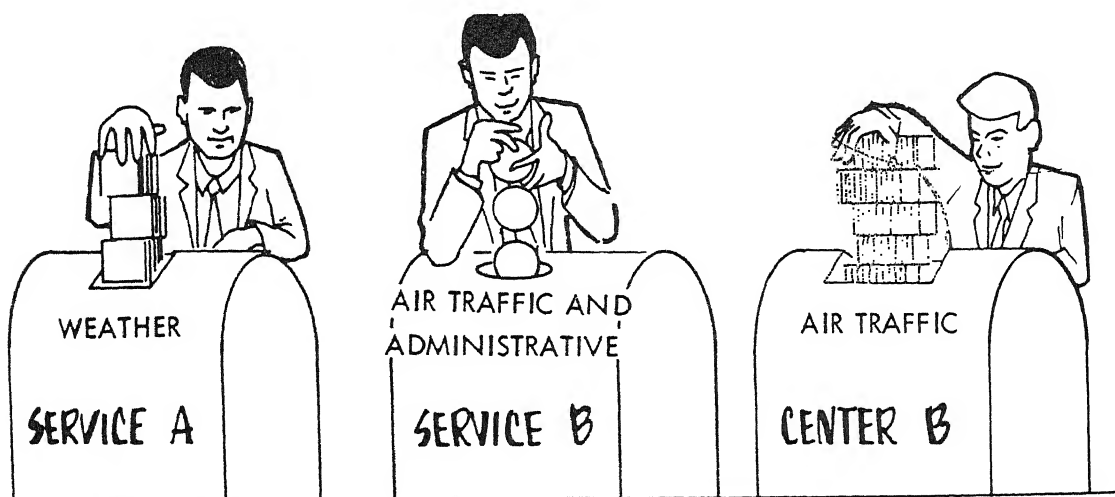

Why is the system in the above illustration better than the system shown in frame 149?

---

The messages are separated by types and each type is transmitted over a different teletypewriter network.

151


Why is there more than one teletypewriter system?

---


To reduce the volume of messages transmitted on one teletypewriter network and to provide separate networks for different types of messages.

---

A basic part of the teletypewriter network is the circuit, which is identified by number. See illustration below:

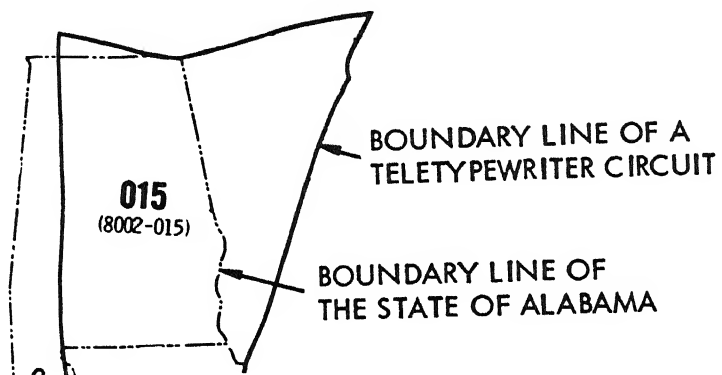

Many states make up the United States of America, likewise many teletypewriter circuits make up a teletypewriter network.

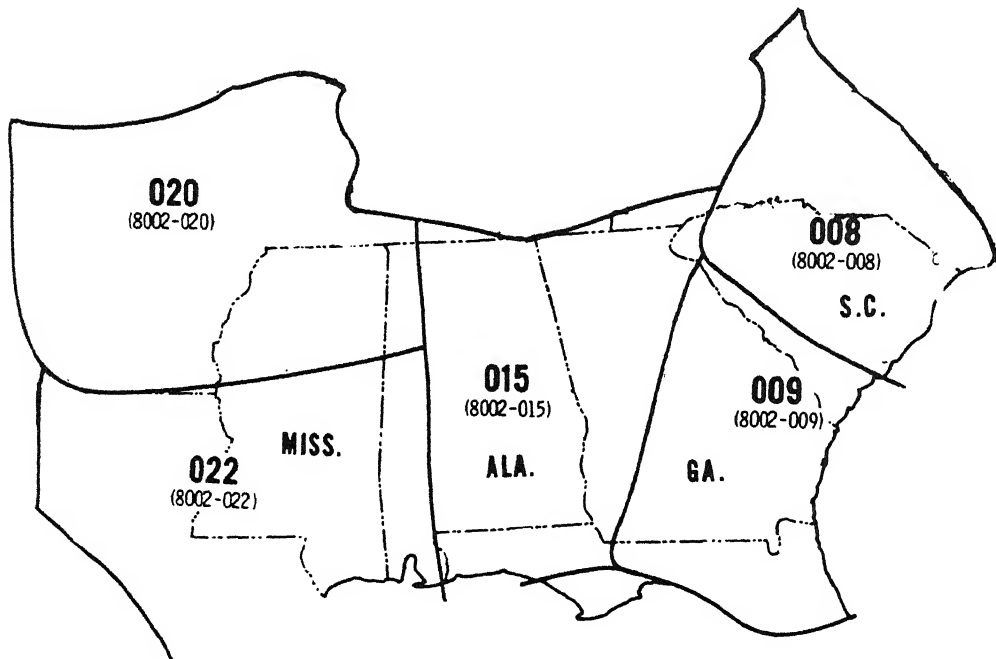

States are common to the United States of America. What is common to a teletypewriter network?


.....

---

Teletypewriter circuits.

---

154 Illustrated below is the Service A weather network with five circuits enlarged.

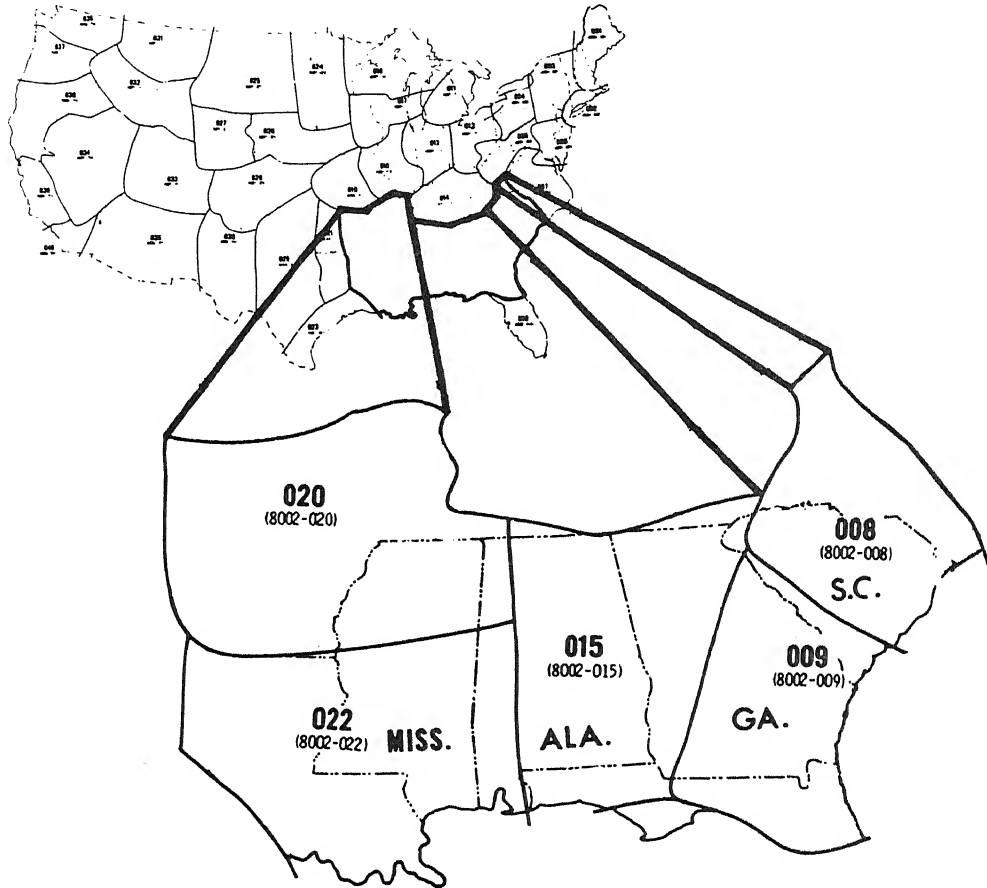

The general boundary of the United States makes up the Service A network. What five circuits are identified in the above illustration?

.....  
.....  
.....

---

008	020
009	022
015	

155

Two or more circuits send-receive stations which exchange the same type of messages make up a network.



---

156

What type of messages are transmitted on the Service A network?

.....

---

Weather

---

157

List the three types of messages exchanged on teletypewriter networks.

.....

.....

.....

---


Air Traffic Control

Weather

Administrative

---

Illustrated below are three teletypewriter networks and the types of messages sent and received by air traffic facilities.

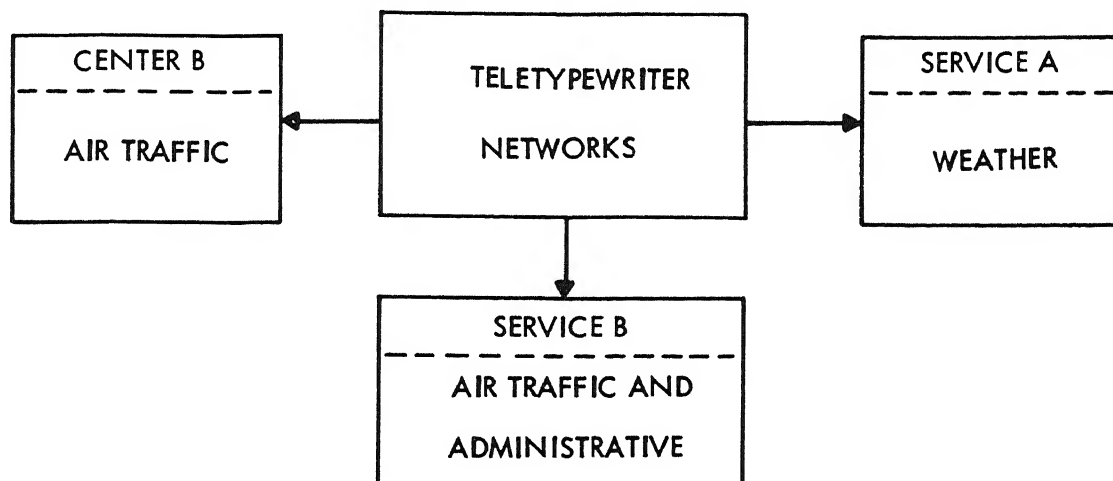

On which network would the following messages be sent?

- ..... A. Information concerning employee pay increases.
- ..... B. Clear weather between St. Louis, Missouri and Oklahoma City, Oklahoma.
- ..... C. A movement and control message on an aircraft flying IFR between Tulsa, Oklahoma and Dallas, Texas.

Service B      A.

Service A      B.

Center B      C.

Why would you use separate networks to send different types of messages?

The large volume of messages could not be serviced by one network.

160

Refer to frame 158 and identify the three basic teletypewriter networks and their function.

.....  
.....  
.....

---

Center B - Air Traffic

Service A - Weather


Service B - Air Traffic and Administrative

161

Navigational and teletypewriter equipment have monitoring systems which alert the specialist when equipment is not operating properly.

GREEN LIGHT-NORMAL OPERATION

RED LIGHT-ABNORMAL OPERATION

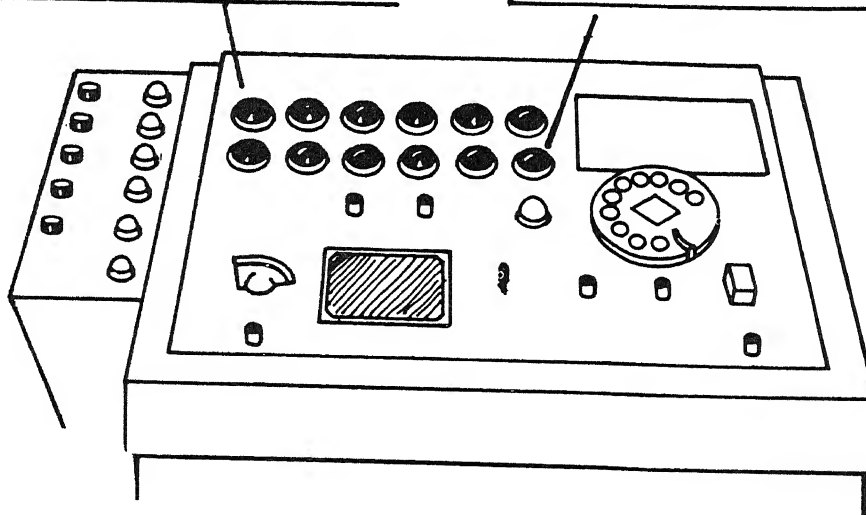

Each monitoring system may be somewhat different. The monitor illustrated above is one type. What would you visually observe that indicates something is wrong?

.....

---

A red light.

---

162

What indicates that the equipment is operating normally? Refer to frame 161.

.....

---

A green light.

---

163

In addition to the red light, a bell or buzzer sounds when any part of the equipment has failed. This feature was designed to alert the specialist when he is working in an area away from the monitoring system. When you hear a bell or buzzer from the monitor equipment, what has happened?

.....

---

A piece of equipment has failed.

---

164

What methods are used to alert the specialist of a malfunctioning piece of equipment?

..... A.

..... B.

..... C.

---

Red light     A.

.....

Bell           B.

.....


Buzzer        C.

.....

---

165

The services performed by the FAA rely on an extensive telephone communications network. There are two primary telephone systems used in FAA facilities; the standard or commercial telephone which the public may use to contact FAA facilities, and an extensive private system which is an interphone network commonly referred to as Service F.

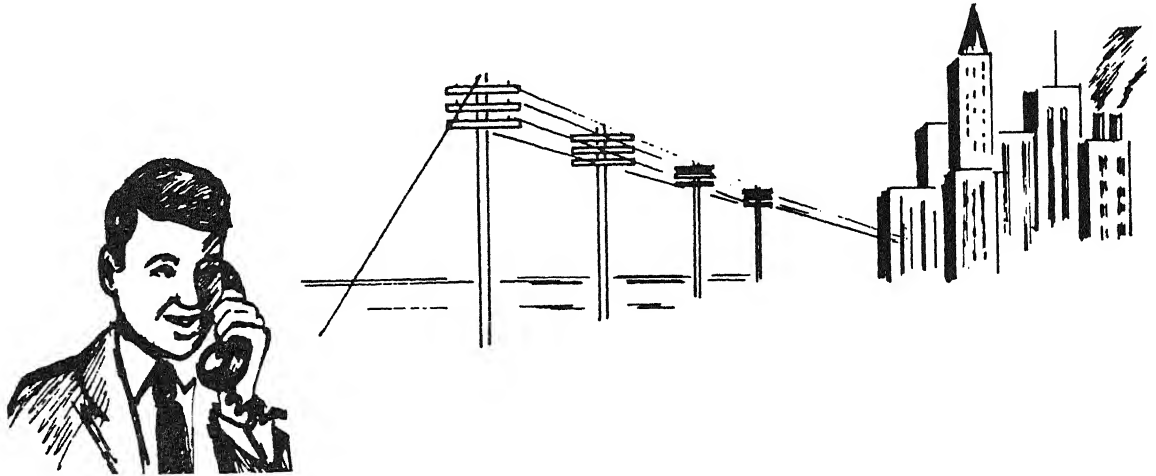

166

What is the name of the extensive private interphone network used by FAA?

.....

-----  
Service F  
-----  
-----

## SECTION 6


### PHRASEOLOGY AND CONTRACTIONS

---

167      Phraseology and contractions are a form of shorthand used by the Air Traffic Control Specialist to form words, letters, and phrases. The following section provides examples of this shorthand and explains why it is used in FAA communications.

---

The following are examples of contractions used in messages.

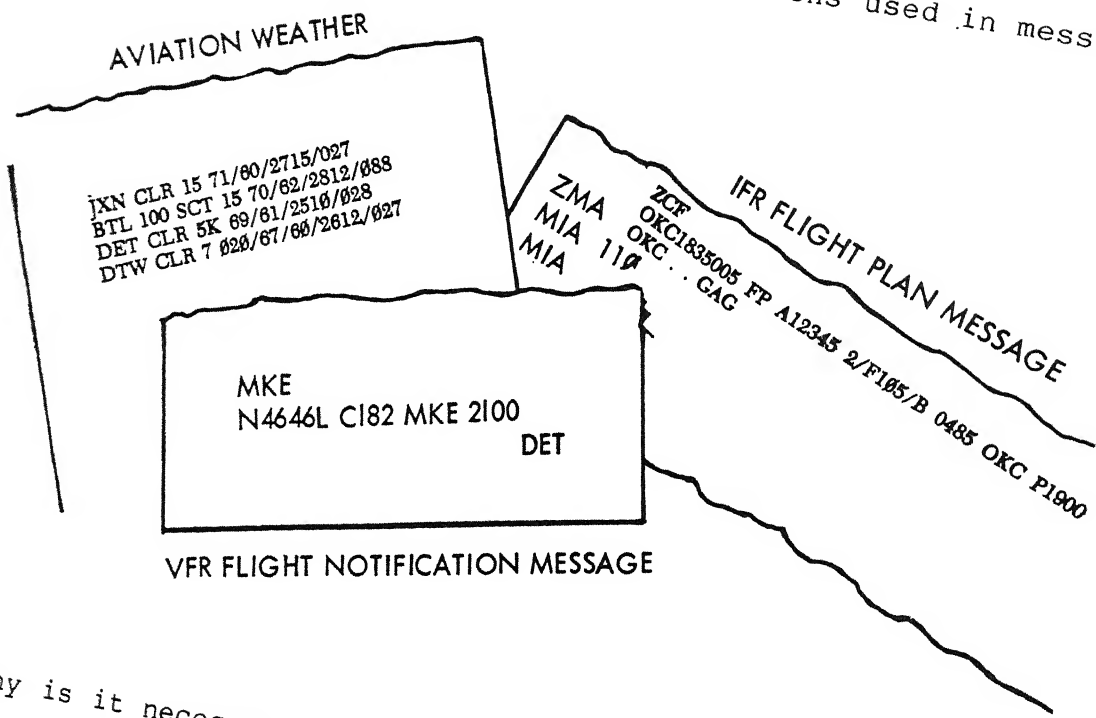

Why is it necessary to use phraseology and contractions?  
.....

To shorten messages.

Contractions are used in many different types of teletypewriter messages and radio transmissions. Some examples are shown below.

CONTRACTIONS	
RAREP -	RADAR WEATHER REPORT
VSBY -	VISIBILITY
GF -	GROUND FOG

What is the contraction for radar weather report?

.....


---

RAREP

---



There are prescribed procedures and phraseology that the Air Traffic Control Specialist uses to communicate with other specialists and pilots. This eliminates confusion, and insures that specialists and pilots interpret messages in the same manner.

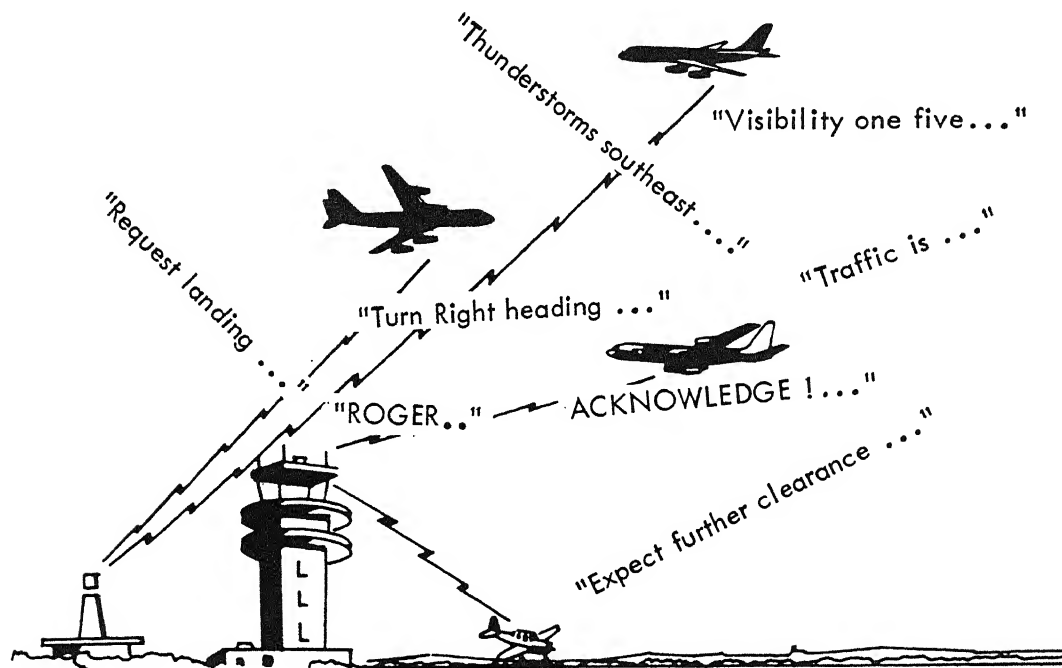

What would happen if all of the above communications were given without following prescribed procedures?

.....

---

Confusion

---

171

standard phraseology eliminates confusion and error in communications. This is true whether communicating with aircraft or other air traffic facilities. Look at this illustration.



"N1234, TURN RIGHT HEADING  
ONE EIGHT ZERO"

What would you expect N1234 to do if the specialist used standard phraseology as illustrated above?

.....

---

Turn right to a heading of 180°

---

172

Why was the previous transmission successful?

.....

---

The specialist used standard phraseology.

---

173

What does standard phraseology do to improve communications?

.....

---

Eliminates error and confusion.

---

177


Flight Assistance Service (FAS) is furnished for all categories of aircraft by specialists in Airport Traffic Control Towers (ATCT), Air Route Traffic Control Centers (ARTCC), and Flight Service Stations (FSS).

PRIMARYLY CONTROL  
(SOME FAS)




ATCT

PRIMARYLY CONTROL  
(SOME FAS)



ARTCC

FAS ONLY



FSS

Which facility provides only Flight Assistance Service?

.....

-----  
FSS

178

What is the function of a Flight Service Station?

.....

-----  
Provide Flight Assistance Service

179

What is another duty of ATCTs and ARTCCs in addition to their primary duty of controlling air traffic?

.....

-----  
Provide Flight Assistance Service

Flight Assistance Service covers many types of service. One of these services is providing assistance to aircraft in flight. Look at the illustration below.

### INFLIGHT SERVICES

"I'M LOST. CAN  
YOU HELP ME?"



If a pilot is disoriented, what facilities may he contact for assistance?

.....  
.....  
.....

---

FSS

ATCT

ARTCC

---

181

FSS personnel must be completely familiar with the topographical features of the terrain within a 100-mile radius of their facility. If a pilot is lost within this area and can see the ground without difficulty, what would the FSS specialist most likely ask him to do?


.....

---


Describe the terrain.

---

Assume that the pilot responds in the following manner.



"I SEE A DRIVE-IN  
MOVIE AND THE  
JUNCTION OF THE  
TWO RIVERS. CAN  
YOU TELL ME WHERE  
I AM?"



What kind of information can the specialist give the pilot after receiving this report?

.....

His position.

---

183

All air traffic facilities use radio for the exchange of information. Name these facilities.

.....

.....

.....

---

ATCT


ARTCC

FSS

184

The specialist has other equipment to use in assisting aircraft. Direction finder equipment gives the direction of an aircraft from an airport.

DIRECTION  
FINDER  
(DF)

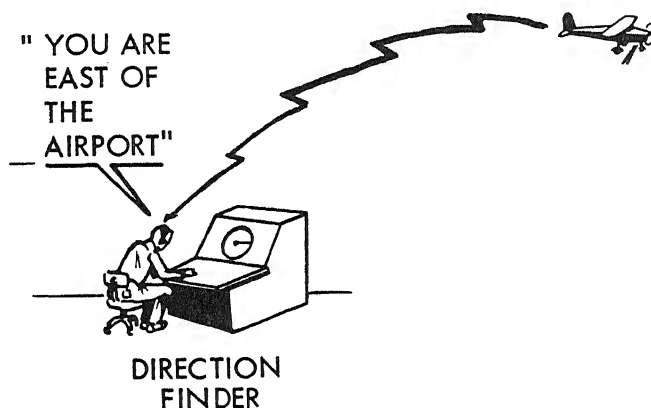

Name the equipment which determines the direction of an aircraft from an airport.

.....

-----  
DF

185

When using DF to orient a lost pilot, the specialist will be able to tell the pilot his direction from what central point?

.....

-----  
An airport.  
-----

186

Direction finder equipment does not give distance information. However, the illustration below shows equipment which does give distance information.

"THE  
AIRCRAFT  
IS 10 MILES  
EAST OF THE  
AIRPORT."



RADAR

What kind of facility equipment does give distance information?

.....

---

Radar

187

Radar assists specialists in determining the position of an aircraft by providing what two kinds of information?

.....

.....

---

Distance

Direction

---

188

Radar is used chiefly for controlling traffic; it is also used in assisting aircraft.

Name the facilities which use radar to control air traffic.

.....

.....

---

ATCT

ARTCC

---

189

Which Air Traffic Facilities provide inflight assistance?

.....

.....

.....

---

ARTCC

ATCT

FSS

---

190

What three types of equipment can be used to assist aircraft?

.....

.....

.....

---

Radio

Direction finding




Radar



Inflight assistance is needed when pilots encounter sudden, unexpected occurrences. Five kinds of emergencies are pictured.

MATCH THE FOLLOWING:

- a. Equipment \_\_\_\_\_
- b. Fire \_\_\_\_\_
- c. Weather \_\_\_\_\_
- d. Lost \_\_\_\_\_
- e. Fuel \_\_\_\_\_

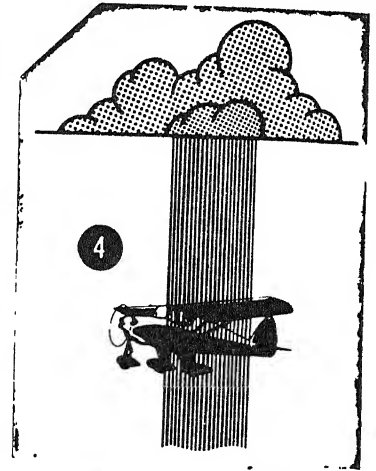

- 
- a. 5
  - b. 3
  - c. 4
  - d. 2
  - e. 1
-


Specialists provide flight monitoring service for aircraft flying over hazardous areas.

"CLEVELAND, I'M OVER  
THE CLEVELAND VOR  
ENROUTE OVER LAKE  
ERIE TO DETROIT."



WATER

"VALDOSTA, I'M OVER  
THE VALDOSTA VOR  
ENROUTE OVER THE  
OKEFENOKEE TO ALMA."



SWAMP

"DENVER, I'M OVER  
THE DENVER VOR  
WESTBOUND ACROSS  
THE ROCKIES!"



MOUNTAIN

The pilot could request that his flight be monitored while flying over the types of areas pictured above. What three kinds of areas are pictured above?

.....

.....

.....

---


Water

Swamp

Mountain

---

Air traffic facilities issue advisories and information to assist pilots in conducting safe flight.

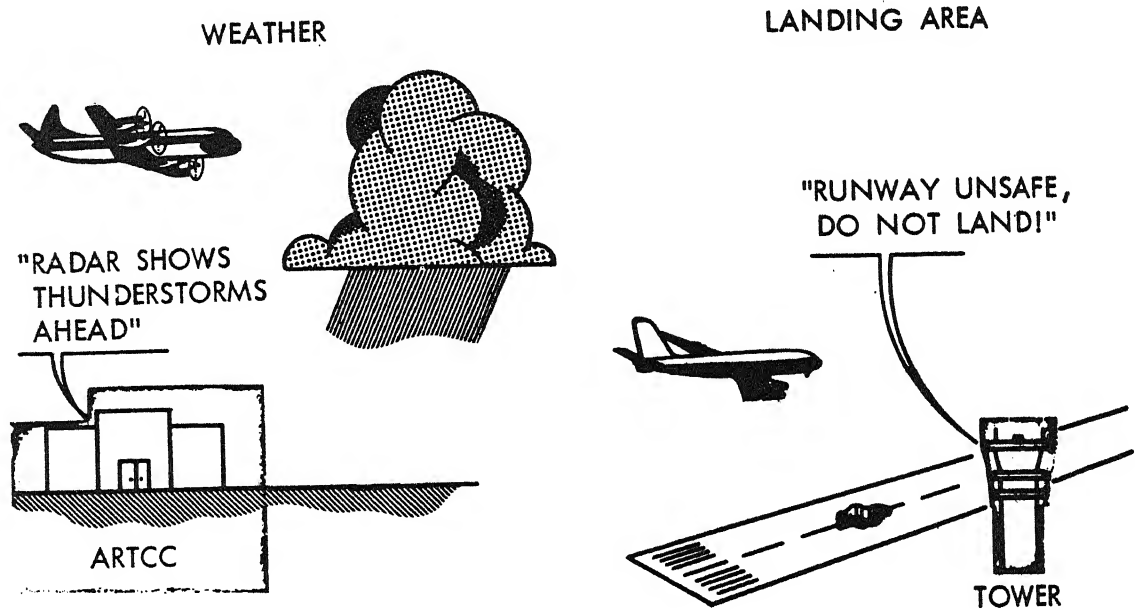

Why is the ARTCC issuing an advisory to the aircraft in the above illustration?


.....

---

To warn the pilot of thunderstorms.

---

Normally, information transmitted by specialists is directed to a specific aircraft, and the pilot is expected to acknowledge. A radio broadcast, however, is a transmission to all pilots at the same time. Pilots are not required to acknowledge this type of transmission. Scheduled and unscheduled aviation weather broadcasts are examples.

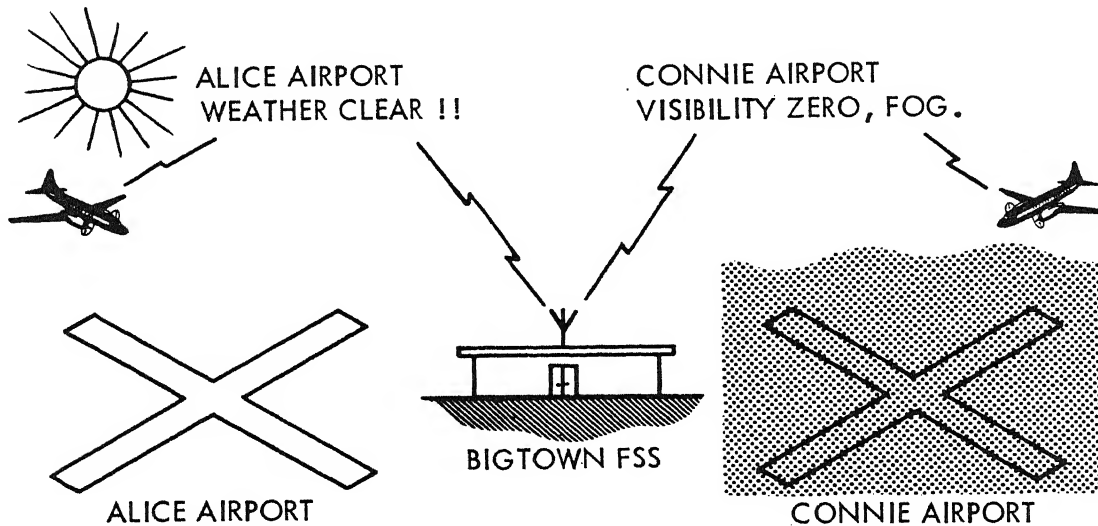


What air traffic transmission requires no acknowledgement?

---

Radio broadcast

---


Pilots can receive complete face to face preflight information from Flight Service Specialists.

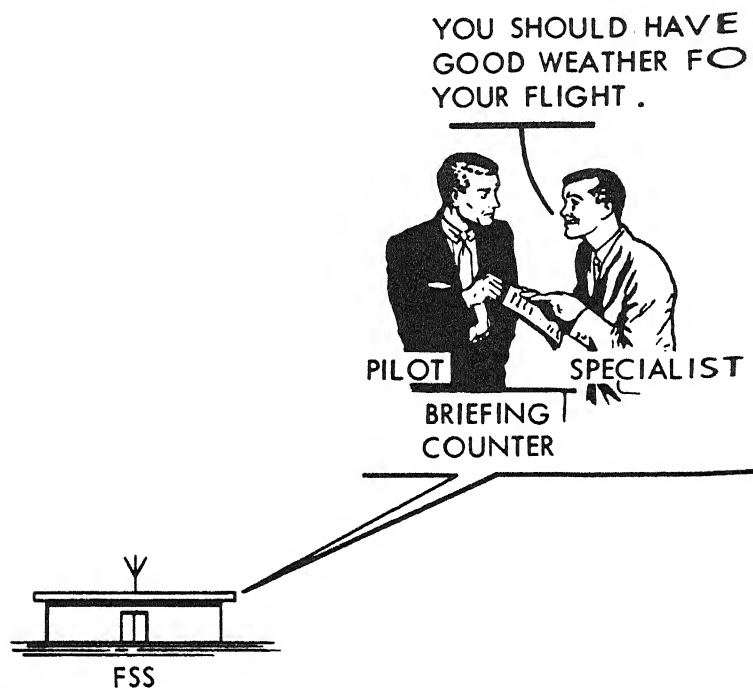

Which air traffic facility gives face-to-face preflight information?

Flight Service Station

Some pilots may not be able to visit the Flight Service Station for a face-to-face preflight briefing. Assuming the pilot is at the location shown below:

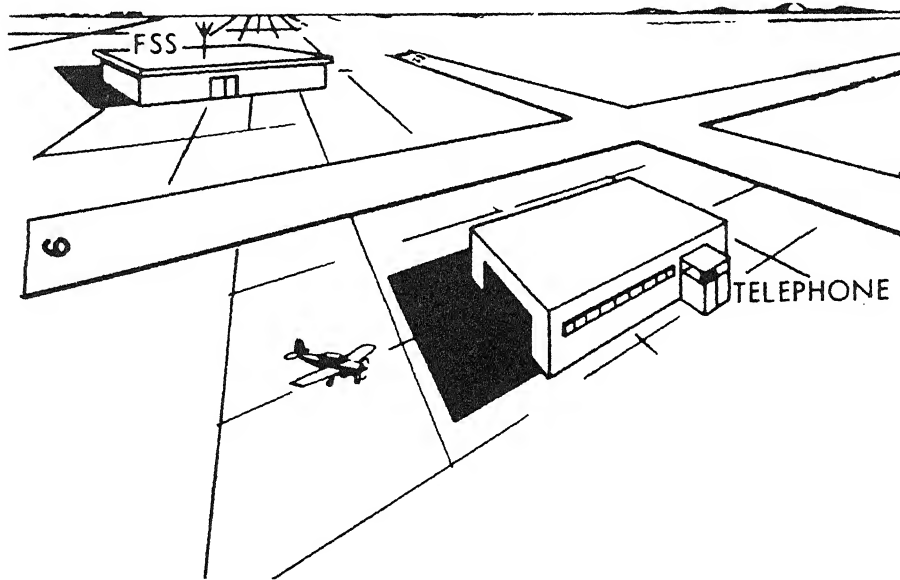

He cannot visit the FSS to get preflight information. How can he obtain a weather briefing?

.....


---

Telephone

---

197

In the illustration below the pilot was unable to obtain a pre-flight briefing.

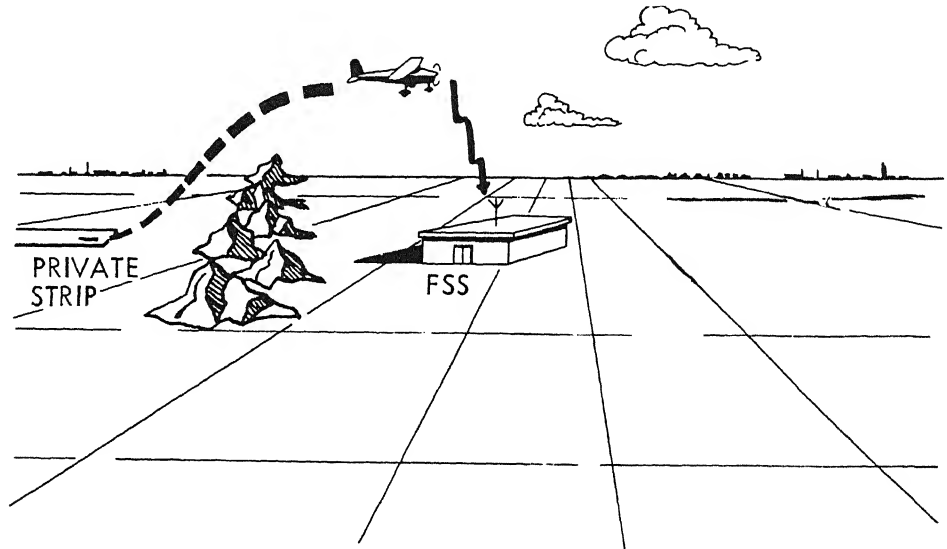

What method of communication is the pilot using to obtain flight information?

.....

Radio

198

Name three methods by which a pilot can obtain preflight service

.....

.....


.....

Face-to-face (walk-in)

Telephone

Radio

FSS specialists are trained to make recommendations concerning the advisability of flight based on information at their disposal. You are briefing a non-instrument rated pilot who plans to fly from Cheyenne, Wyoming, to Scottsbluff, Nebraska. The flight cannot be conducted without encountering IFR conditions.

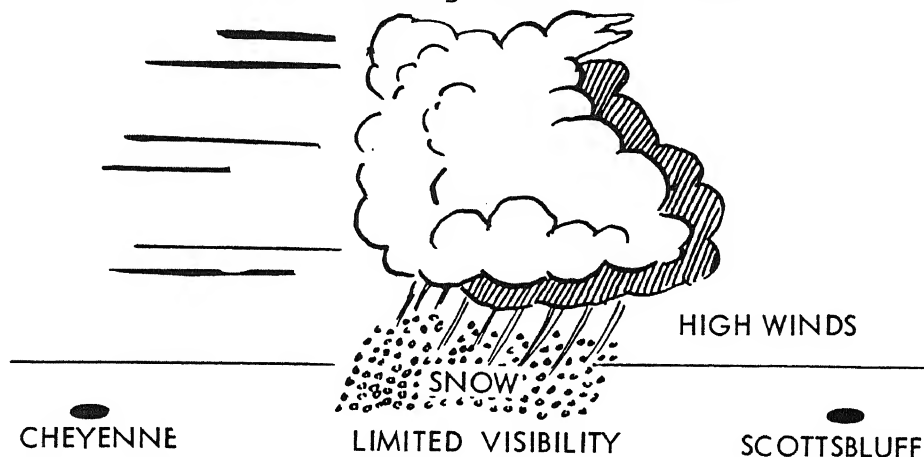

What is your recommendation to this pilot?

.....

-----

VFR not recommended (VNR)

In addition to weather information FSS specialists provide pertinent aeronautical information.

What aeronautical information would be helpful to the pilot before takeoff?

.....

-----

Destination airport runway closed.



Classify the following types of information as:

W = Weather

or

AI = Aeronautical Information

- ..... A. Thunderstorm in vicinity of destination.
- ..... B. Air show in progress at destination.
- ..... C. Radio ranges are all operative.
- ..... D. Clear weather en route to destination.
- ..... E. Runway closed.
- ..... F. Visibility zero - fog.

---

W    A.

AI   B.


AI   C.

W    D.

AI   E.

W    F.

---

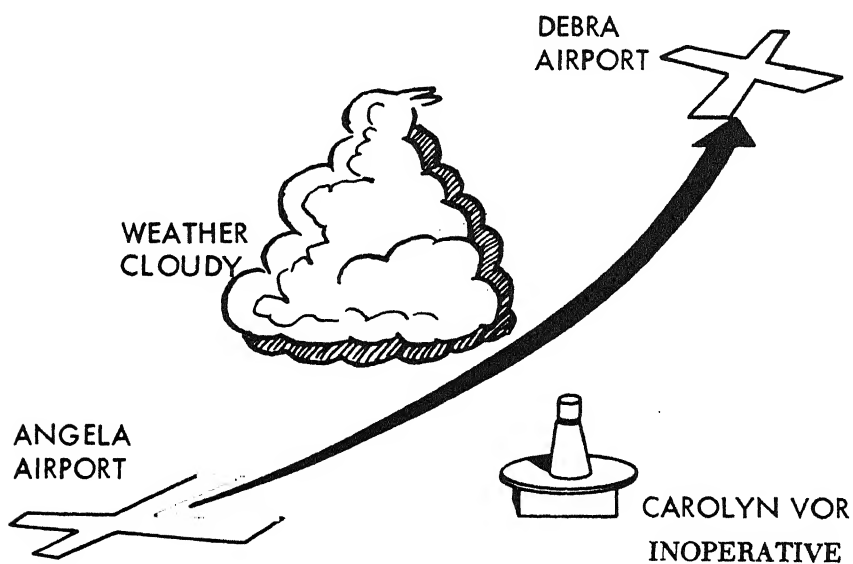

A pilot plans to fly from Angela to Debra. What weather and aeronautical information should the specialist give the pilot during the preflight briefing?

.....

.....

---

Weather - Cloudy

Aeronautical information - Carolyn VOR inoperative.

---



What does preflight planning help to insure?

.....

---

A safe flight.

---

204

If a pilot cannot visit a Flight Service Station, how can he obtain a preflight briefing?

.....

---

By telephone or radio

---

205

What two kinds of information are furnished by specialists during preflight briefings?

.....

.....

---

Weather

Aeronautical information

---

A pilot should fill out a flight plan form and give it to an Air Traffic Control Specialist. This procedure insures search and rescue service in the event the aircraft does not arrive at its destination.

FLIGHT PLAN RECORD (FAA Use Only)							
1. TYPE <input checked="" type="checkbox"/> VFR <input type="checkbox"/> IFR <input type="checkbox"/> DVFR	2. AIRCRAFT IDENTIFICATION N6864S	3. AIRCRAFT TYPE/SPECIAL EQUIPMENT C210	4. TRUE AIRSPEED 180 KTS	5. DEPARTURE POINT PWA	6. DEPARTURE TIME PROPOSED (Z) 1730 ACTUAL (Z)		7. CRUISING ALTITUDE 55
8. ROUTE OF FLIGHT  OKC V163							
9. DESTINATION (Name of airport and city) ADM		10. EST. TIME EN ROUTE HOURS 00 MINUTES 50		11. REMARKS			
12. FUEL ON BOARD HOURS 04 MINUTES 55		13. ALTERNATE AIRPORT(S)		14. PILOT'S NAME, ADDRESS, TELEPHONE NUMBER, AND AIRCRAFT HOME BASE HAROLD WELLER 3605 BLAKE ST. OKLAHOMA CITY, OKLA.		15. NUMBER ABOARD 2	
16. COLOR OF AIRCRAFT BLUE + WHITE		<input type="checkbox"/> WEATHER BRIEFING		SPECIALIST INITIALS		TIME STARTED	
						<input type="checkbox"/> VNR	

FAA Form 7233-3 (3-72)

U.S. GOVERNMENT PRINTING OFFICE 1974-672-406

Refer to the above illustration when answering the following questions.

.....

.....

PWA (Wiley Post)

ADM (Ardmore)

207

How much fuel is aboard the aircraft?

.....

4 hours 55 minutes

208

What type of flight plan was filed?

.....

VFR

209

What is the aircraft identification?

.....

N6864S

210


What is the reason for filing a VFR flight plan?

.....

To assure search and rescue service in the event the aircraft  
not arrive at its destination.

211

Air Traffic Control Specialists are responsible for initiating communications searches for known overdue aircraft. They may use telephone, teletypewriter, or other available communication media in attempting to locate these aircraft.

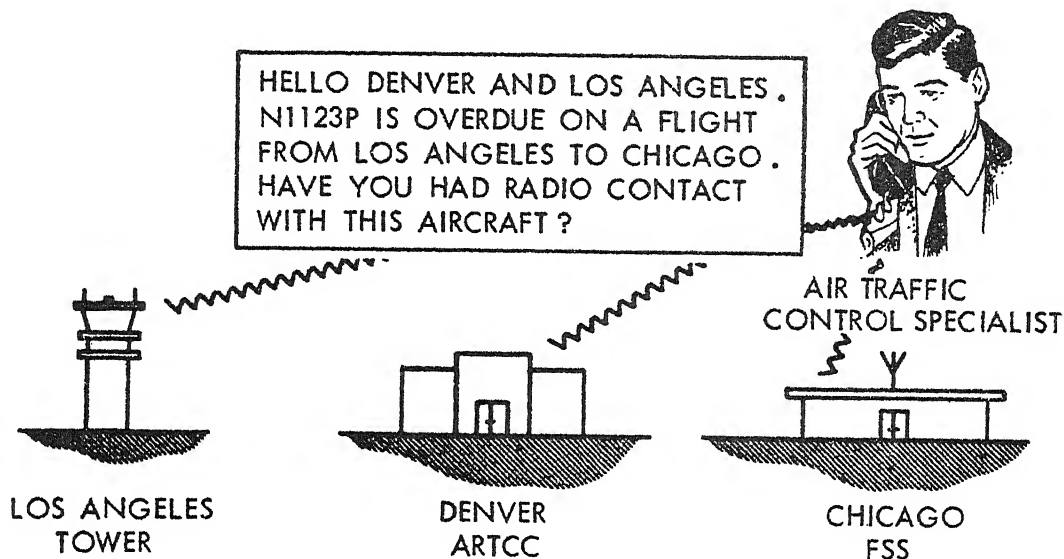

In the above illustration what method of communication is being used to conduct the communications search?

.....

-----

Telephone

212

In addition to the telephone, what other media may be used to locate overdue aircraft?

.....


.....

-----

Teletypewriter or other available communications.

213

If a communications search does not result in locating an aircraft, Air Traffic Facilities cooperate with the various search and rescue facilities if a physical search for the aircraft must be conducted.

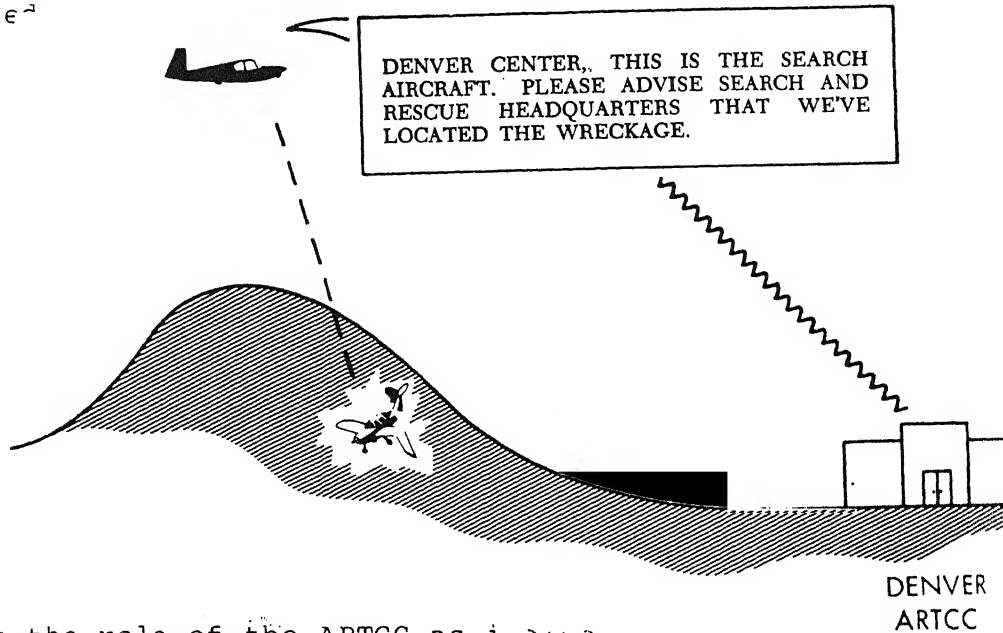

What is the role of the ARTCC as indicated in the above illustration?

.....

Relay information to search headquarters.

214

Name the two types of searches that may be conducted for an aircraft.

.....


.....

Communication

Physical

5

Air Traffic Control Specialists support military flight activities. An important part of this support involves the transmission of a message every time a military aircraft arrives or departs from an airport.

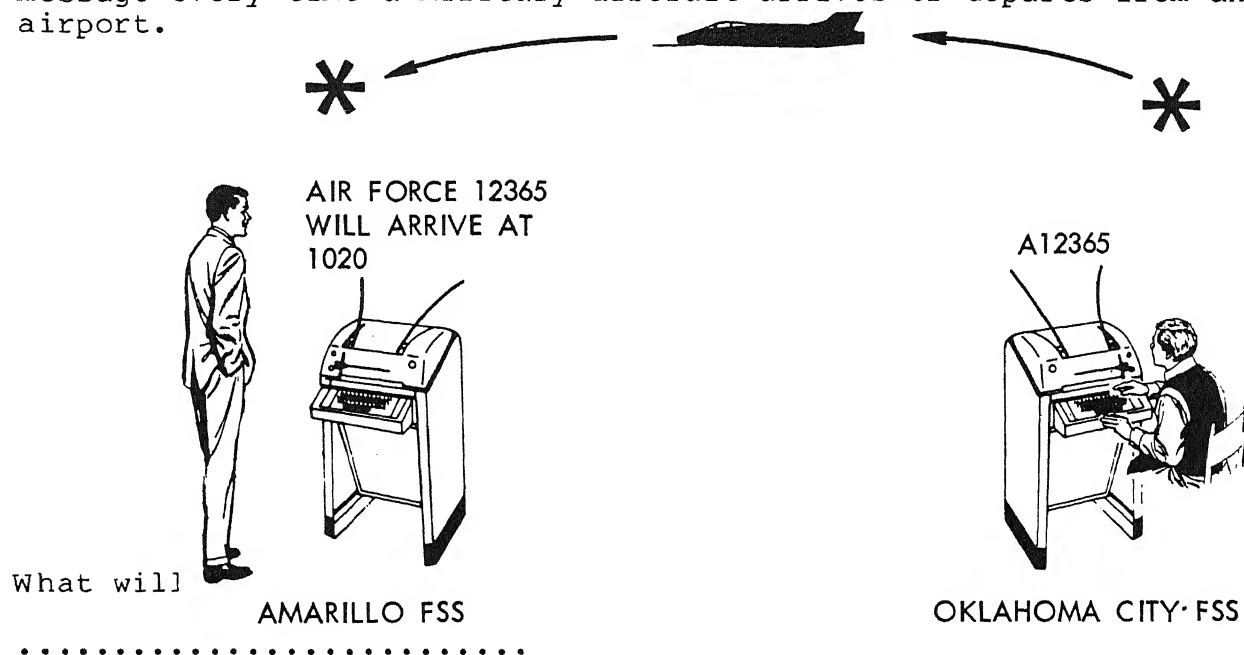

Transmit a message to Amarillo.

16

Which of the following are considered as Flight Assistance Services?

- ..... A. Inflight
- ..... B. Post-flight
- ..... C. Preflight
- ..... D. Search and rescue

A.

C.

D.




217

Earlier you were shown pictures of a control tower. Now learn a little of what the tower specialist does at the positions of operation.

218

An Airport Traffic Control Tower issues instructions and information to pilots.

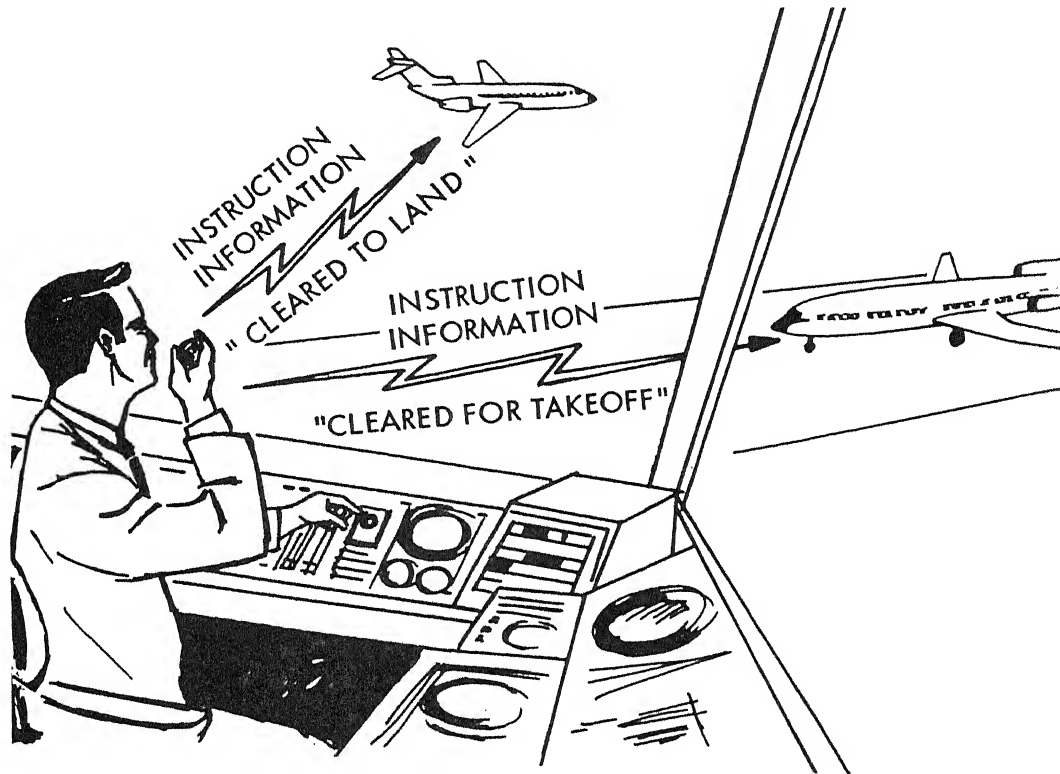

Where are the Air Traffic Controllers located who control the movement of aircraft on the taxiways, runways and in the air at the airport?


.....

Control Tower

The local controller and the ground controller are responsible for different portions of the movement area.

A movement area includes runways, taxiways, and other areas of an airport which are utilized for the taxiing, departing, and landing of aircraft. Movement areas do not include loading ramps and parking areas.

### THIS IS A MOVEMENT AREA

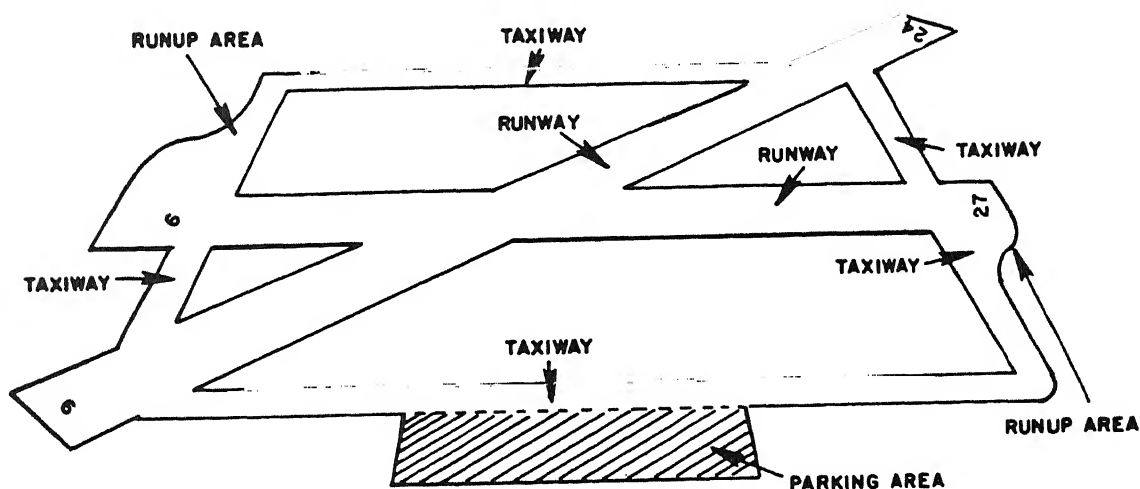

What part of the movement area is controlled by the local controller?

.....

The runways

Name the area controlled by the ground controller.

.....

Taxiways

221

The local controller controls aircraft in the air and on the runways.



What name is given to the controller in the tower who issues instructions and information to pilots in airborne aircraft in the vicinity of an airport?

.....

---

Local Controller

222

The local controller also controls aircraft while they are landing or taking off.

What part of an airport do aircraft use for landing or takeoff?

.....

---

Runways

23

A local controller issues instructions and information to pilots when aircraft are in two defined areas. Name these areas.

.....

.....

---


When aircraft are in the vicinity of an airport.

When aircraft are on the runway.

---

24

A ground controller controls aircraft on the ramps and taxiways.

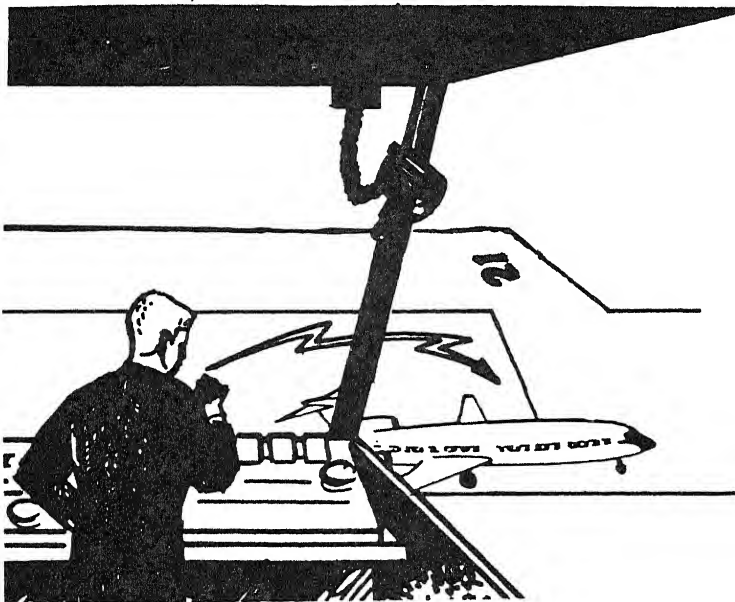


If an aircraft desires to leave the parking area and move to a taxiway, the pilot will contact the:

- ..... A. Ground Controller
- ..... B. Communication Specialist
- ..... C. Airport Manager
- ..... D. Local Controller

---

A.

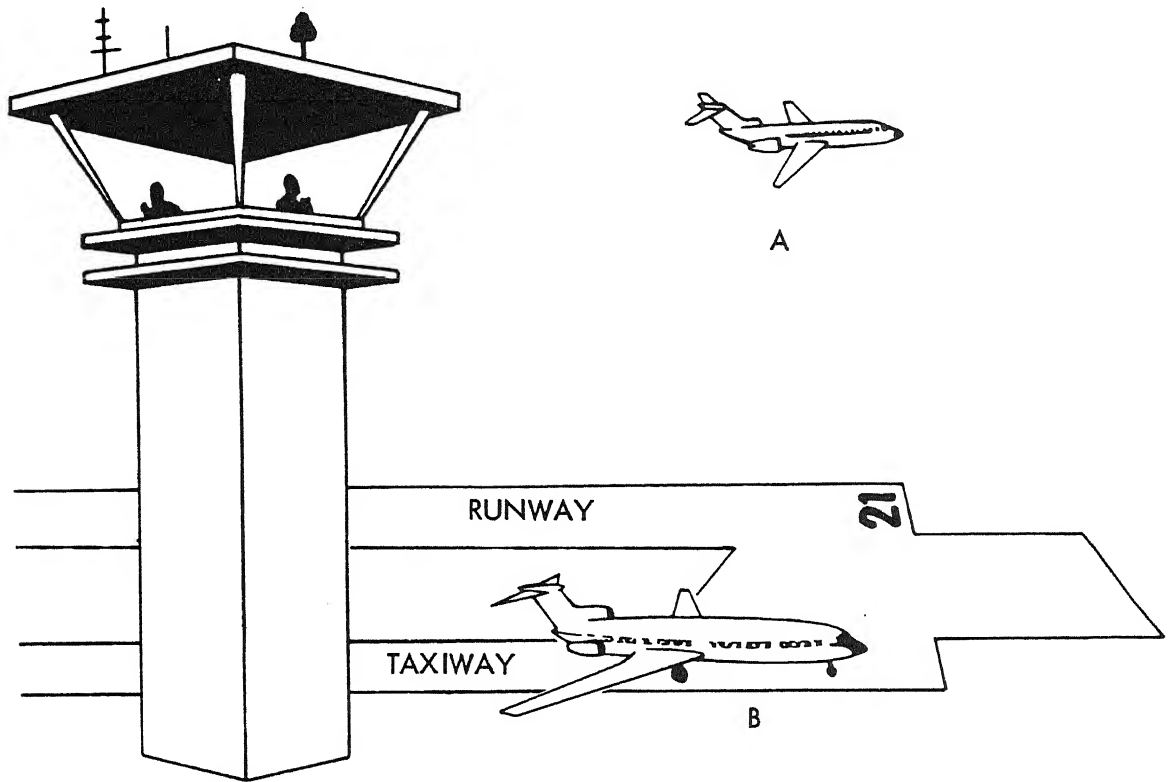

The local controller normally communicates with which aircraft?


..... A.

..... B.

---

A.

---

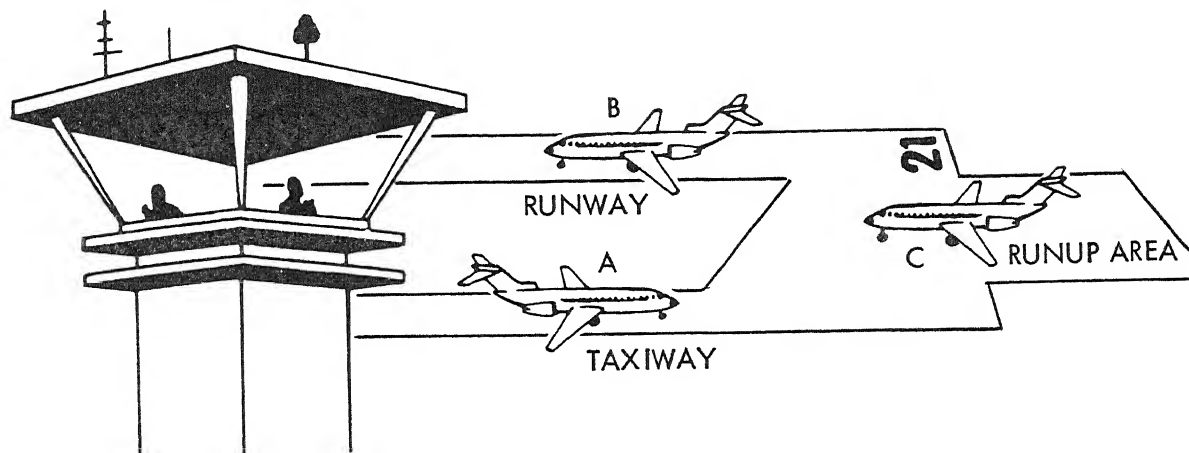

Which controller will aircraft C contact to receive takeoff clearance?


.....

---

The local controller

---

The local controller uses established separation standards to separate landing and departing aircraft.

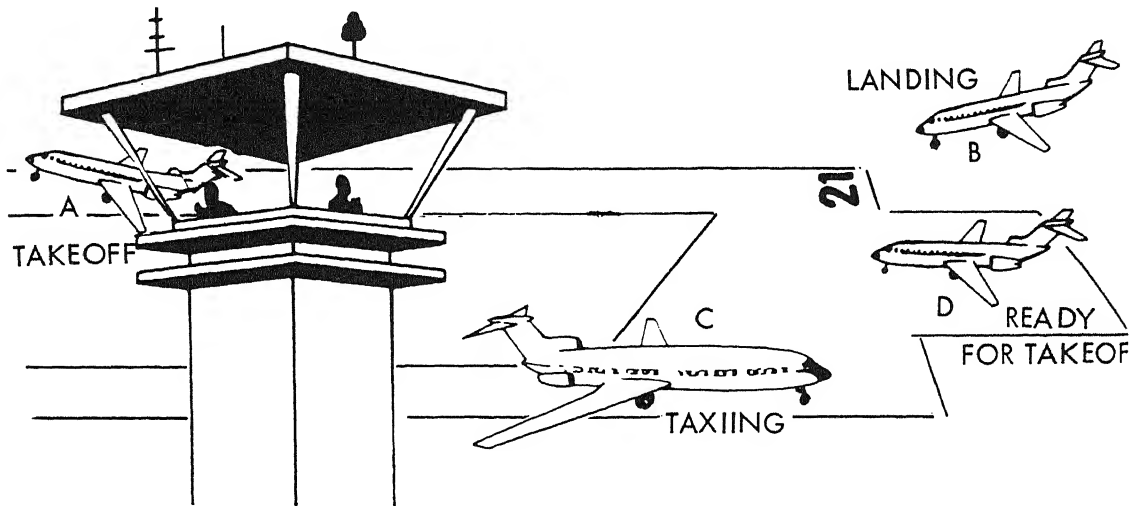

Which aircraft above are controlled by the local controller and which are controlled by the ground controller?

- ..... A.
- ..... B.
- ..... C.
- ..... D.

Local Controller A.  
.....

Local Controller B.  
.....

Ground Controller C.  
.....

Local Controller D.  
.....

---

228

Separation is most critical between which two aircraft in the previous illustration?

..... A. and B.

..... C. and D.

..... B. and D.

---

A. and B.

---

229

Which portion of the movement area is controlled by the ground controller?

.....

---

Taxiways

---

230

When two aircraft are departing, who is responsible for issuing instructions which will keep the aircraft separated?

.....

---


The local controller

---



231

A pilot who wishes to enter an airport traffic area and land must have permission to enter this area.

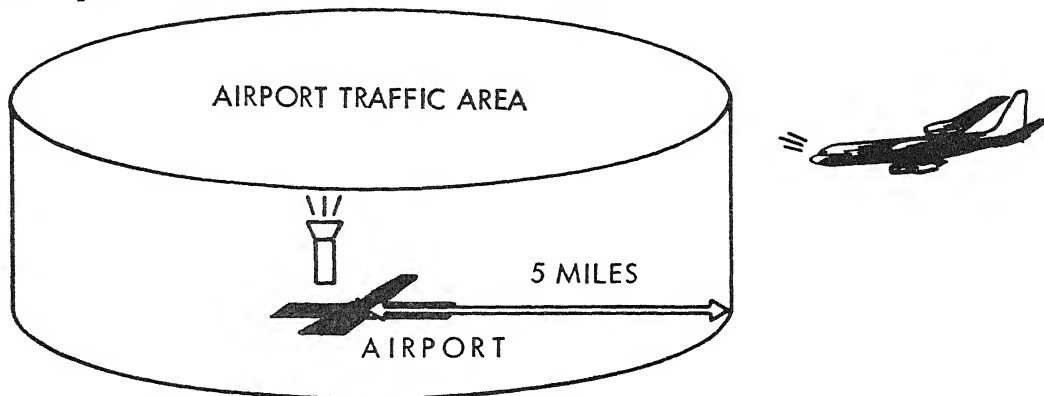

Which controller would respond to a landing request from a pilot?


.....

-----

The local controller.

232

Look at the airport traffic area illustrated below.

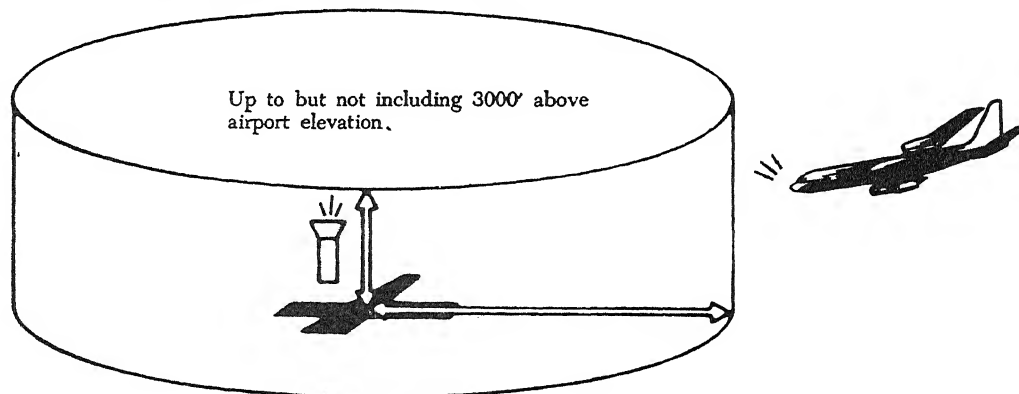

Pilots must obtain permission when they wish to fly within what radius and altitude of an airport?

.....


.....

-----

5 miles

Below 3000 feet above airport elevation.

Where a tower is not in operation, certain designated FSS will issue wind, runway, and traffic information to arriving and departing aircraft. This is called Airport Advisory Service (AAS).

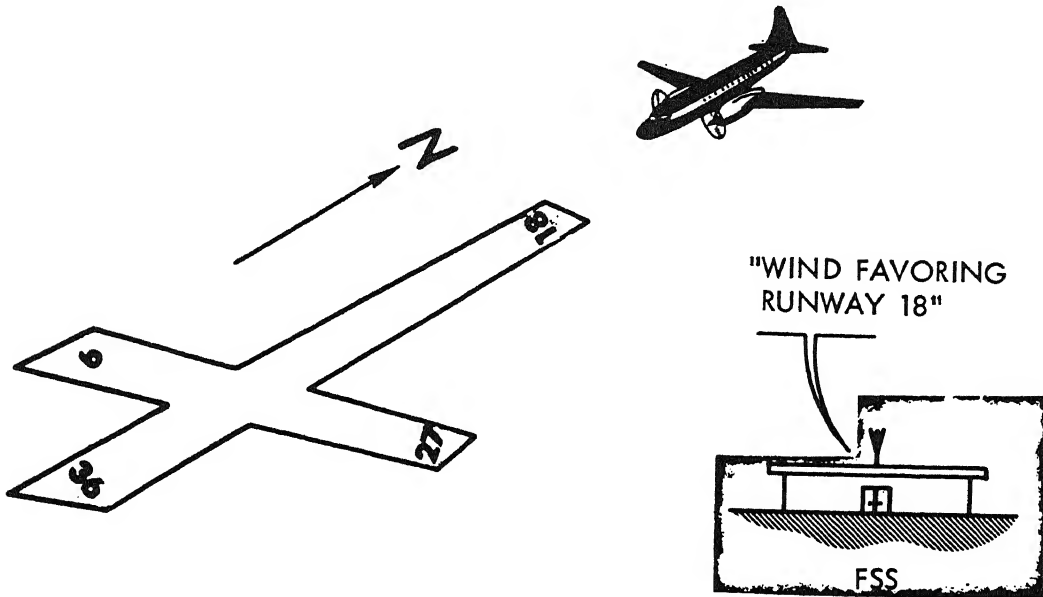

What two kinds of inflight information may the specialist give the pilot shown in addition to traffic information?

.....  
 .....

---

Wind

Runway


Which Air Traffic Facility provides Airport Advisory Service?

.....

---

FSS

Approach Control is an additional control service at airports. Controllers may be located in a room under the cab in the control tower. See illustration below.

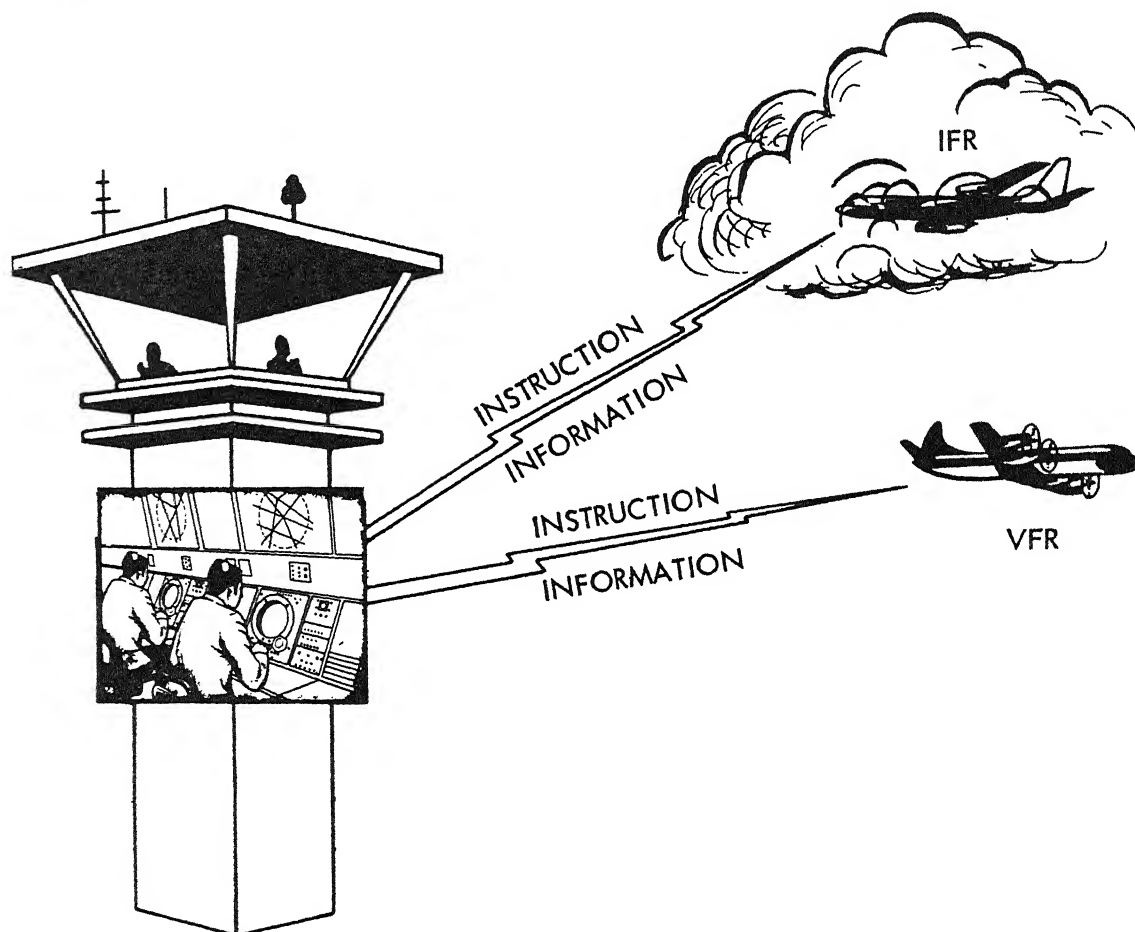

What is similar about the service provided by the local, ground, and approach controllers?


.....

---

All provide instruction and information to pilots.

---

Approach controllers use radio and radar to separate and sequence aircraft.

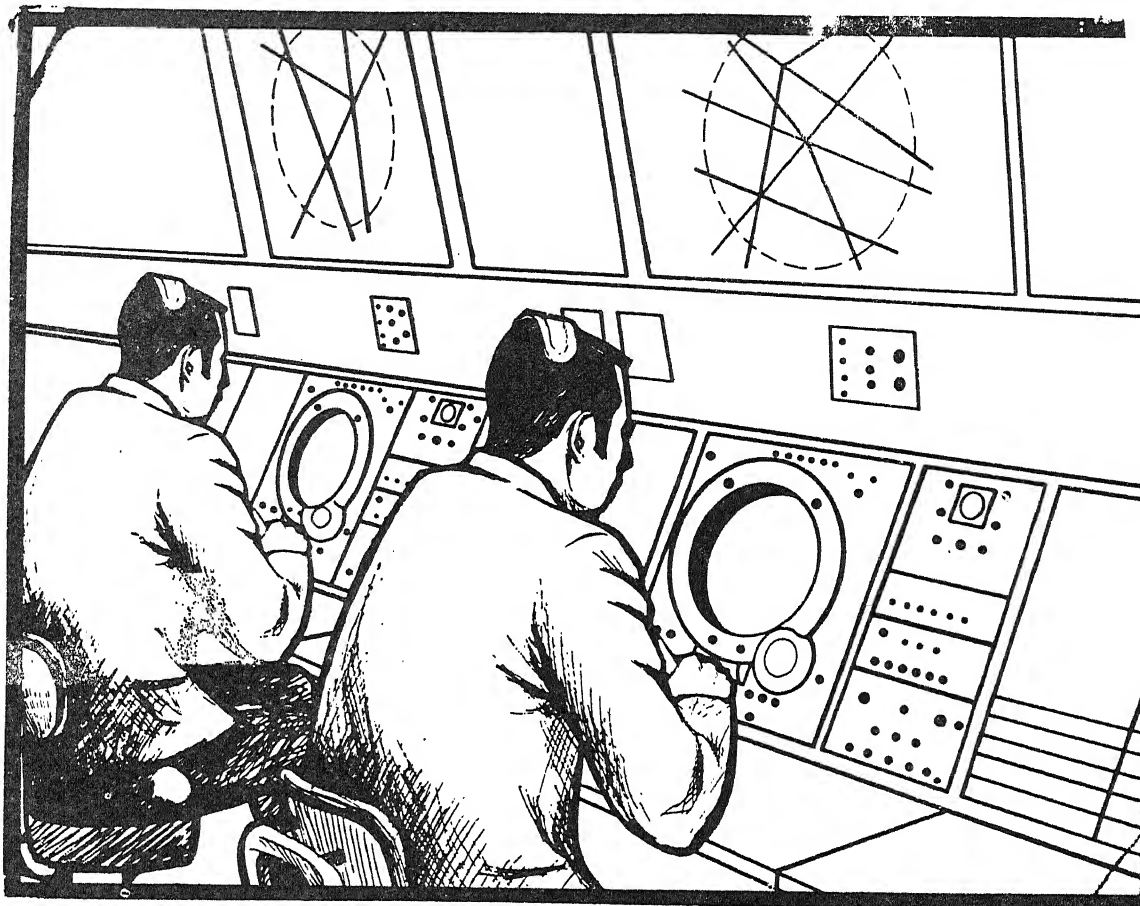

Approach controllers separate and sequence:

..... A. IFR aircraft only.

or

..... B. Both IFR and VFR aircraft.

---

B.

---

237

What kinds of ground equipment do approach controllers use to separate and sequence aircraft prior to landing?


.....  
.....

Radio

Radar

238

Shown below is an example of the airspace controlled by approach control.

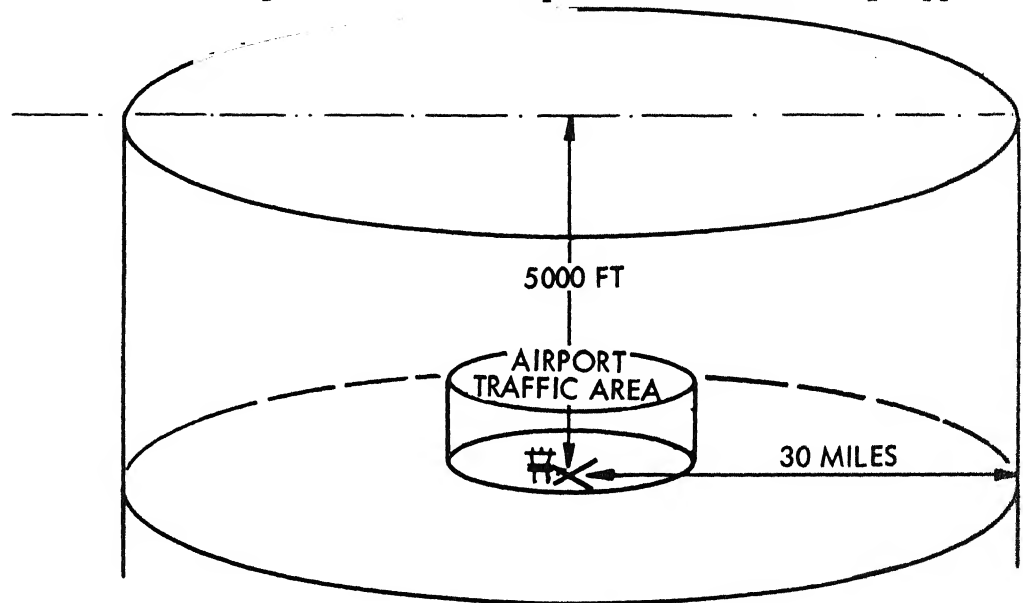


The above example illustrates the fact that the approach control is responsible for more airspace than the local controller. State the dimensions of the airspace under the jurisdiction of the local controller.

.....  
.....  
.....

1. Within a 5-mile radius of the airport.

2. Up to but not including 3000 feet above the airport elevation

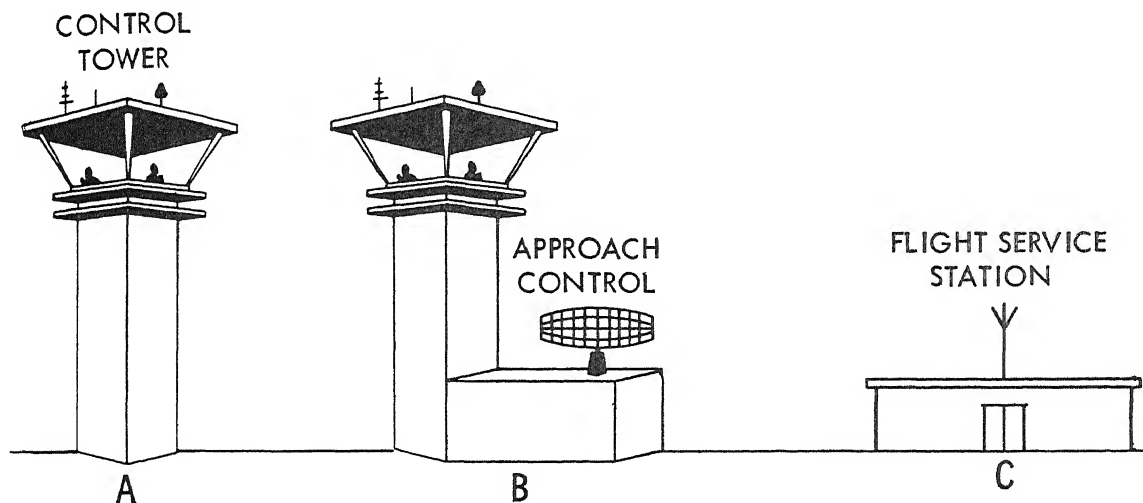

Which facility controls IFR aircraft within 30 miles of the airport?

..... A.


..... B.

..... C.

-----  
B.

After an IFR aircraft leaves the jurisdiction of the control tower he comes under the control of the Air Route Traffic Control Center. The Center will handle the aircraft en route until transferring control to the tower at the destination airport. This section will examine the various duties performed by the Center Specialist.

An Air Route Traffic Control Center's main function is to provide for the safe, orderly, and expeditious movement of traffic operating on the airways.

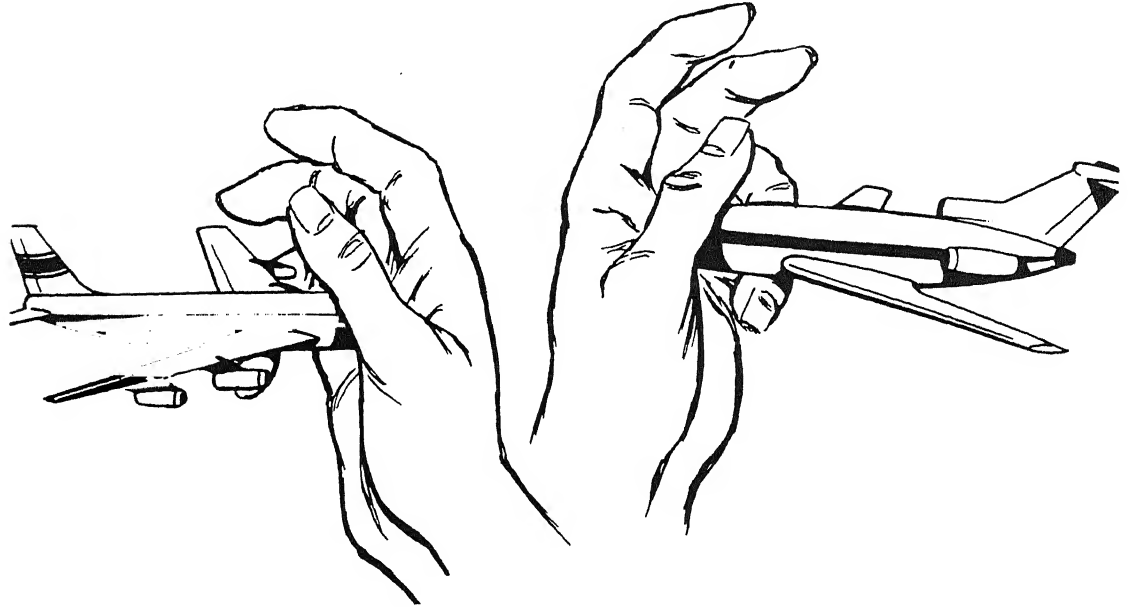

A controller's primary responsibility is to prevent:


- ..... A. Airway congestion.
- ..... B. Delays.
- ..... C. Collisions.
- ..... D. Confusion.

---

C.

---

An airway is a highway in the sky, usually eight-miles wide, established by the Federal Government and marked by navigational aids on the ground.

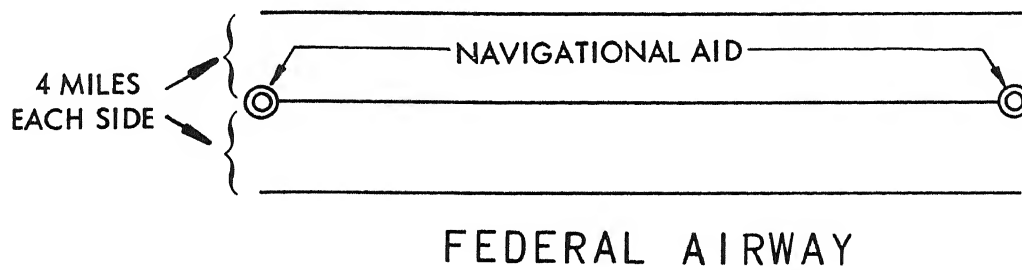

Airways are imaginary highways in the sky and are established by:

- ..... A. Centers.
- ..... B. Stations.
- ..... C. Towers.
- ..... D. The Federal Government.

---

D.


---



There are 21 centers located in the Continental United States. These centers are responsible for separating IFR aircraft operations on the Federal airway system. The location of each center is shown in the illustration below.

LOCATION OF ARTCCs IN THE CONTINENTAL U.S.

AS OF JUNE 1970

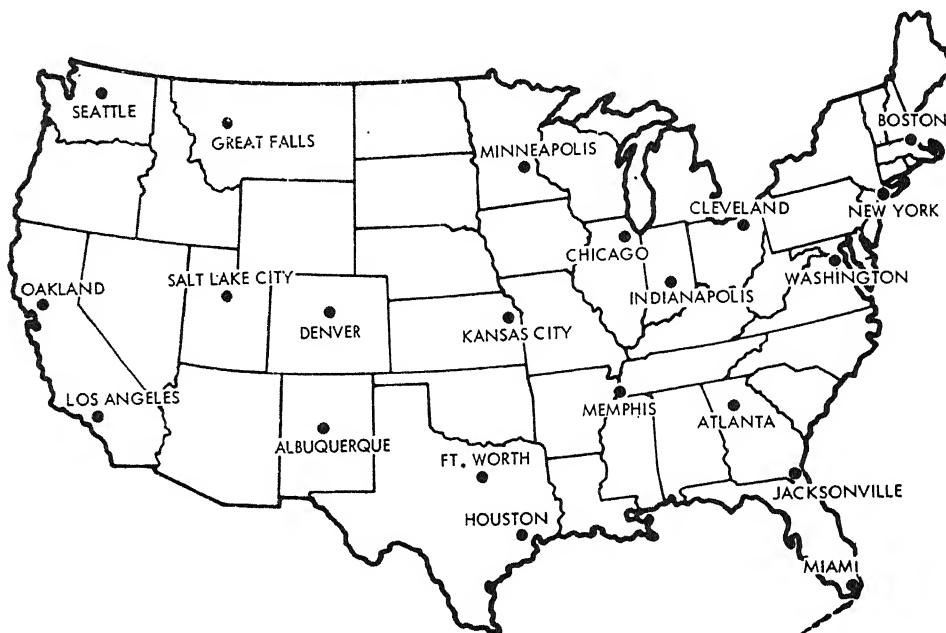


Which center is responsible for separating air traffic in South California?

- ..... A. Seattle
- ..... B. Oakland
- ..... C. Los Angeles


C.

There are six other centers in various geographical locations operated by the Federal Government. These locations are:


- (1) Anchorage, (3) Honolulu, (4) Guam,  
(5) Puerto Rico, and (6) Balboa.

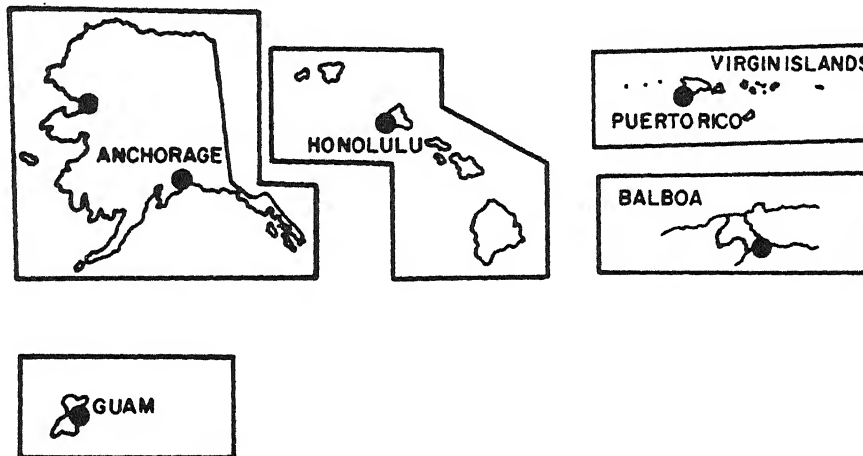

Each center is responsible for providing air traffic service in a designated airspace. This airspace is called the center's area and the boundary of each is marked on maps of the airway system (aeronautical charts), as shown in the illustration below.

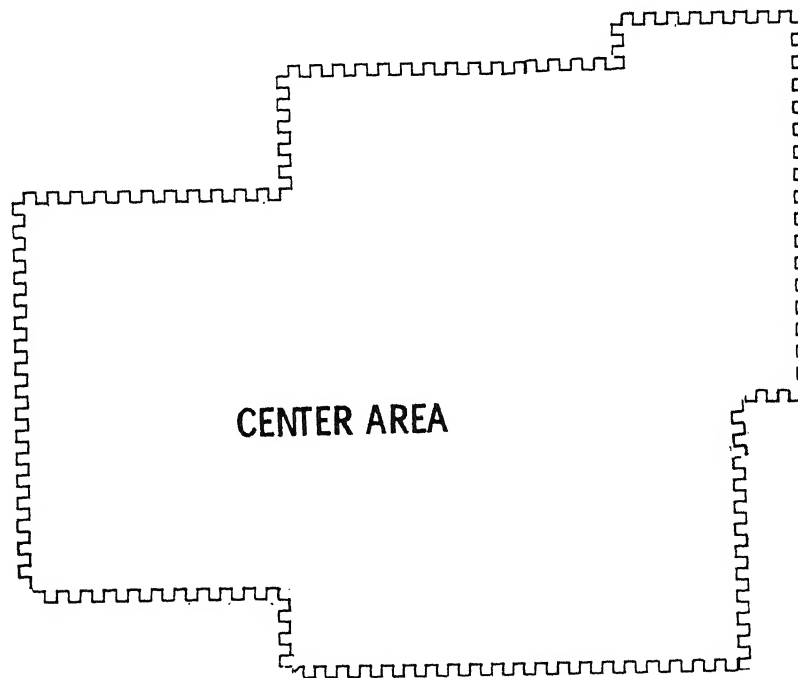

A pilot is operating his aircraft along the route marked in the illustration below, and is receiving separation service from air control.

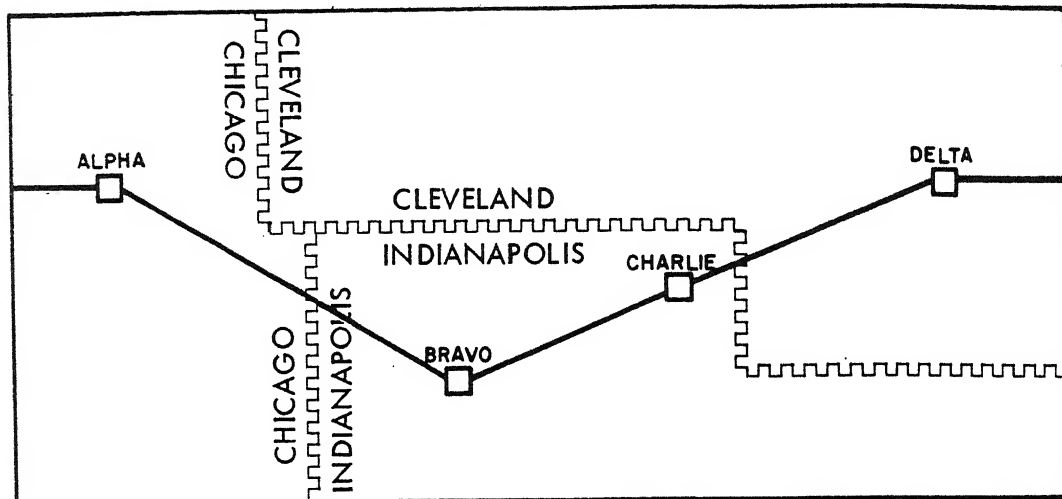

Which center controls this flight when it is over the following cities:


- ..... A. Alpha
- ..... B. Bravo
- ..... C. Charlie
- ..... D. Delta

---

Chicago Center	A. Alpha
Indianapolis Center	B. Bravo
Indianapolis Center	C. Charlie
Cleveland Center	D. Delta

---

Within each center's area, there are areas of controlled and uncontrolled airspace. Controlled airspace is made up of designated airways and routes. In the illustration below the SHADED area represents uncontrolled airspace and the white area is controlled airspace.

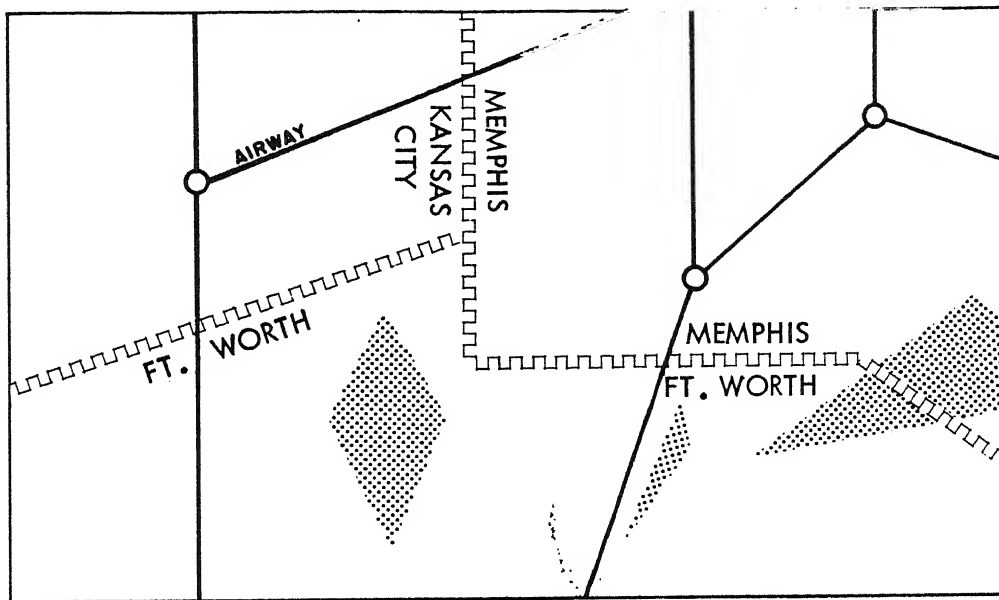

EN ROUTE NAVIGATIONAL CHART


In the above example, the only center area which does not contain some uncontrolled airspace is the ..... area.

---

Kansas City

---

Aircraft that are operating in uncontrolled airspace do not receive separation service. The pilot assumes responsibility for avoiding other aircraft.

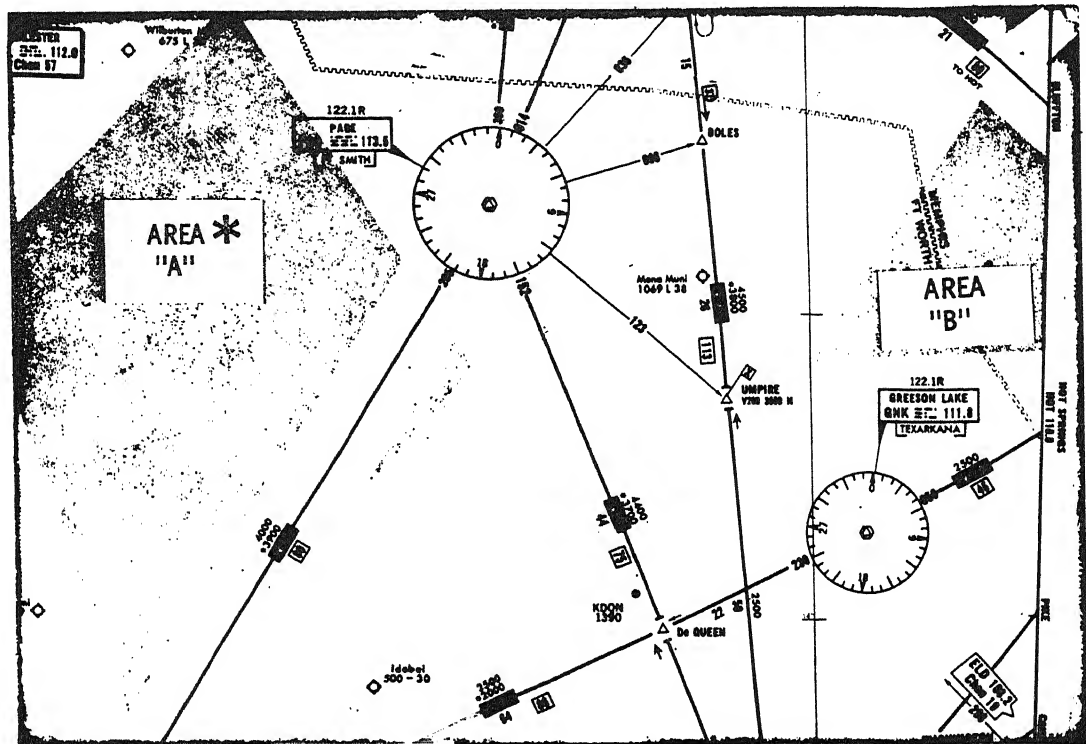


**\* SHADED AREAS - UNCONTROLLED AIRSPACE**

In the above illustration, who is responsible for avoiding other aircraft in area "A"?

.....

The pilot

A center controls aircraft operating on an IFR flight plan between the departure and the destination airports.

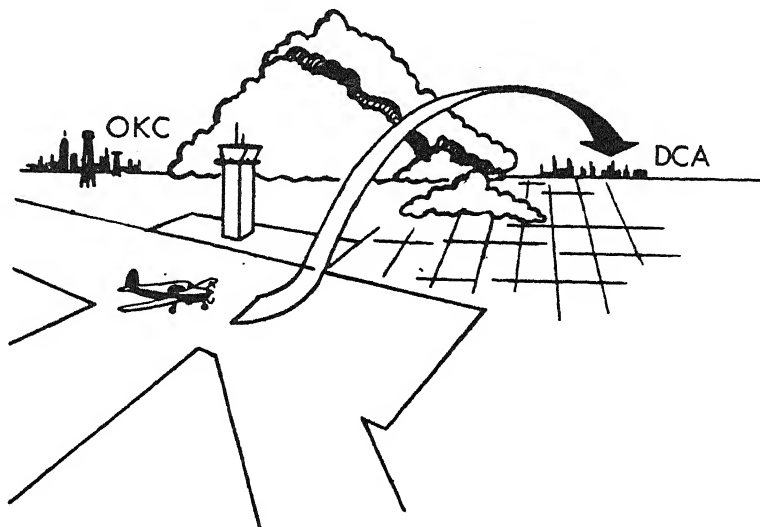

IFR - OKLAHOMA CITY TO WASHINGTON, D.C.

In the above illustration, the aircraft is under the control of the tower while operating in the vicinity of the airport. What type of facility is controlling the aircraft en route to Washington, D.C.?

.....

---

Center

---

A pilot requests separation service from other aircraft by filing an instrument flight plan. The illustration below is an example of a typical instrument flight plan.

FLIGHT PLAN RECORD (FAA Use Only)													
1. TYPE		2. AIRCRAFT IDENTIFICATION		3. AIRCRAFT TYPE / SPECIAL EQUIPMENT		4. TRUE AIRSPEED		5. DEPARTURE POINT		6. DEPARTURE TIME		7. CRUISING ALTITUDE	
<input type="checkbox"/> VFR <input checked="" type="checkbox"/> IFR <input type="checkbox"/> DVFR		N27W		FA27/A		0230 KTS		JAX		PROPOSED (Z) 1400		ACTUAL (Z) 200	
8. ROUTE OF FLIGHT													
AMG J45													
9. DESTINATION (Name of airport and city)				10. EST. TIME EN ROUTE		11. REMARKS							
ATL				HOURS 00 MINUTES 58									
12. FUEL ON BOARD				13. ALTERNATE AIRPORT(S)				14. PILOT'S NAME, ADDRESS, TELEPHONE NUMBER, AND AIRCRAFT HOME BASE				15. NUMBER ABOARD	
HOURS 03 MINUTES 20				CHS				DON GILLEY 3801 N. 6 <sup>TH</sup> ST. JACKSONVILLE, FLA.				4	
16. COLOR OF AIRCRAFT				WEATHER BRIEFING		SPECIALIST INITIALS		TIME STARTED		VNR			
SILVER				<input type="checkbox"/>						<input type="checkbox"/>			

FAA Form 7233-3 (3-72)

U.S. GOVERNMENT PRINTING OFFICE: 1974 O 77409


What method is used by a pilot to request his flight be separated from other aircraft?

- ..... A. The pilot files a VFR flight plan.
- ..... B. The pilot files an IFR flight plan.

B.

A requirement for filing an instrument flight plan is: (1) the pilot is instrument-rated and (2) the aircraft is equipped with certain instruments.

I. UNITED STATES OF AMERICA							XI.	
DEPARTMENT OF TRANSPORTATION-FEDERAL AVIATION ADMINISTRATION								
THIS CERTIFIES IV. JOHN ROCHESTER DOE								
THAT V. 1234 RAIN STREET								
OKLAHOMA CITY, OKLAHOMA 73129								
DATE OF BIRTH	HEIGHT	WEIGHT	HAIR	EYES	SEX	NATIONALITY		
2-22-20	68 IN.	150	BROWN	BLUE	M	U.S.A. VI.		
IX. HAS BEEN FOUND TO BE PROPERLY QUALIFIED TO EXERCISE THE PRIVILEGES OF								
II. PRIVATE PILOT III. CERT. NO. 000000								
RATINGS AND LIMITATIONS								
XII. AIRPLANE SINGLE ENGINE LAND								
XIII. INSTRUMENTS								
VII. <i>John P. Doe</i> SIGNATURE OF HOLDER								
X. DATE OF ISSUE: VIII. <i>John W. Smith</i> ADMINISTRATOR								
AC FORM 8080-2 (3-69) SUPERSEDES PREVIOUS EDITION								

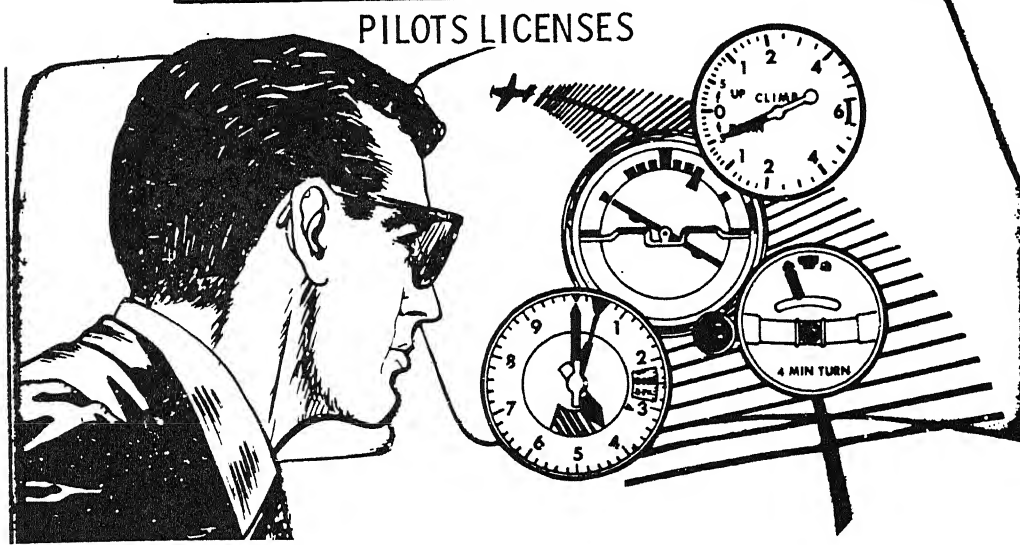


What special skills must a pilot possess in order to file an IFR flight plan?

.....

He must be instrument rated.



One of the primary advantages of being instrument-rated is that the pilot can take off and operate his aircraft in weather conditions that would keep non-instrument-rated pilots on the ground.

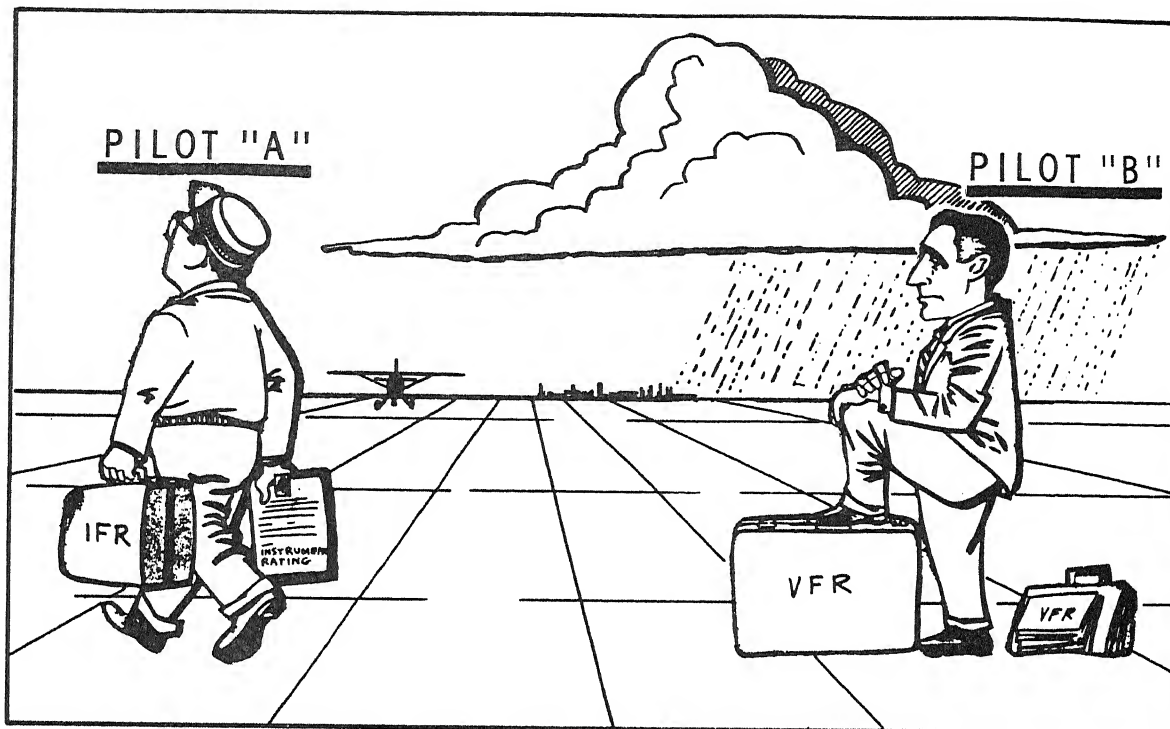

Identify the pilot who is qualified to operate in controlled airspace when low ceilings and poor visibilities exist.

..... A. Pilot "A"


..... B. Pilot "B"

---

A.

---

Although a private pilot may file his instrument flight plan with any ATC facility, he is encouraged to file with a Flight Service Station. This may be done by one of three methods: in person, by telephone, or by two-way radio.

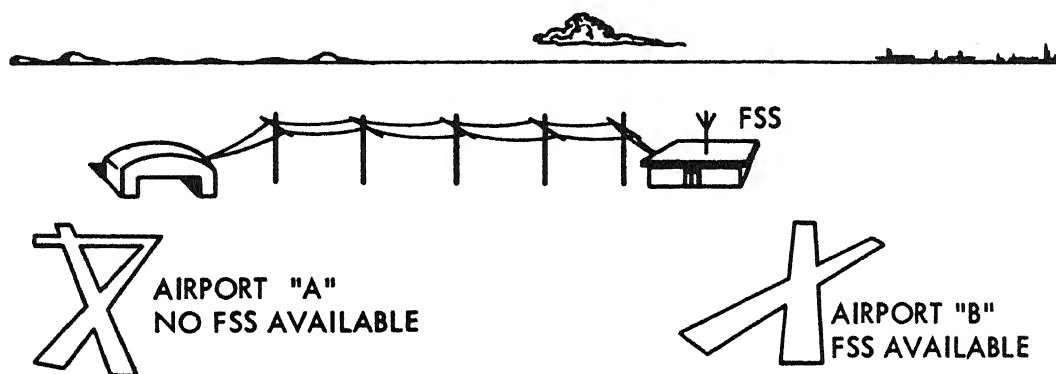


In the above illustration, a pilot wants to fly from airport "A" to airport "B". A station is not available on the departure airport. He should file his flight plan prior to departure with the nearest station by:

- ..... A. Two-way radio.
- ..... B. Telephone.
- ..... C. A personal visit.

---

B.

A pilot should file his IFR flight plan at least 30 to 45 minutes before Proposed departure time. At airports with towers, the pilot calls the tower for a clearance when he is ready for departure. The tower calls the center for an IFR clearance and relays it to the pilot.

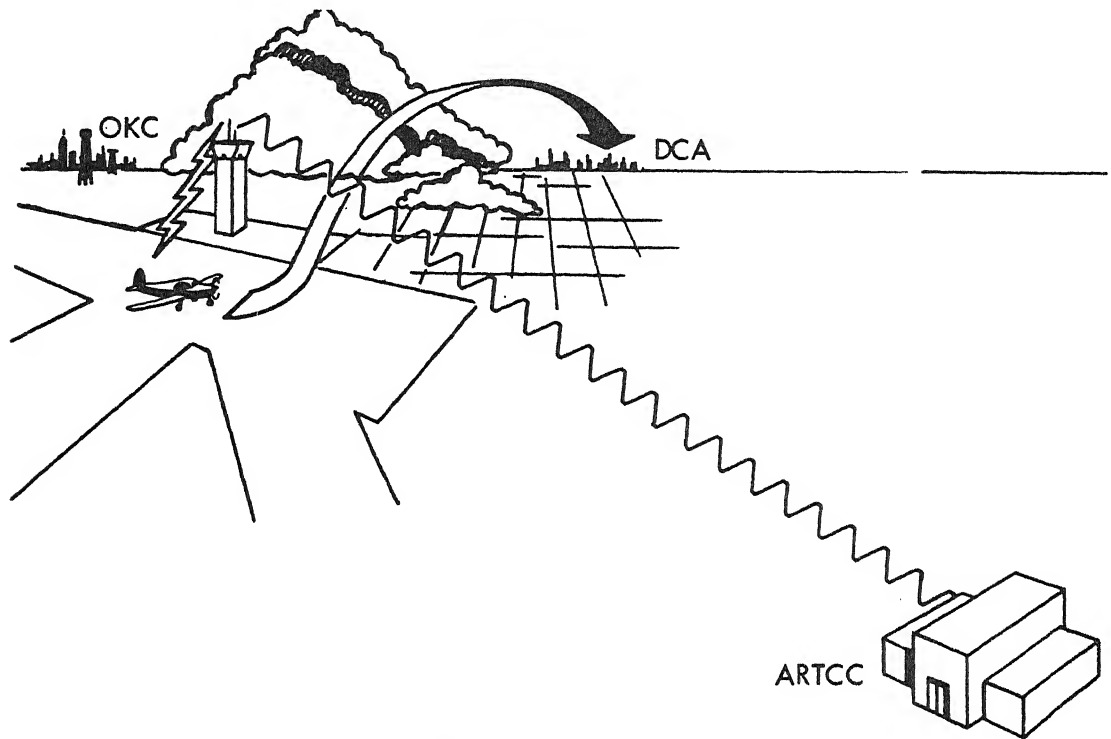

### IFR - OKLAHOMA CITY TO WASHINGTON, D.C.


IFR - OKLAHOMA CITY TO WASHINGTON, D.C.

Who does the tower call for the IFR clearance?

- ..... A. Center
- ..... B. Station
- ..... C. Operations.

A.

A pilot is flying on a VFR flight plan and can see the weather deteriorating ahead of him. If qualified, he can file an IFR flight plan with an ATC facility by two-way radio.

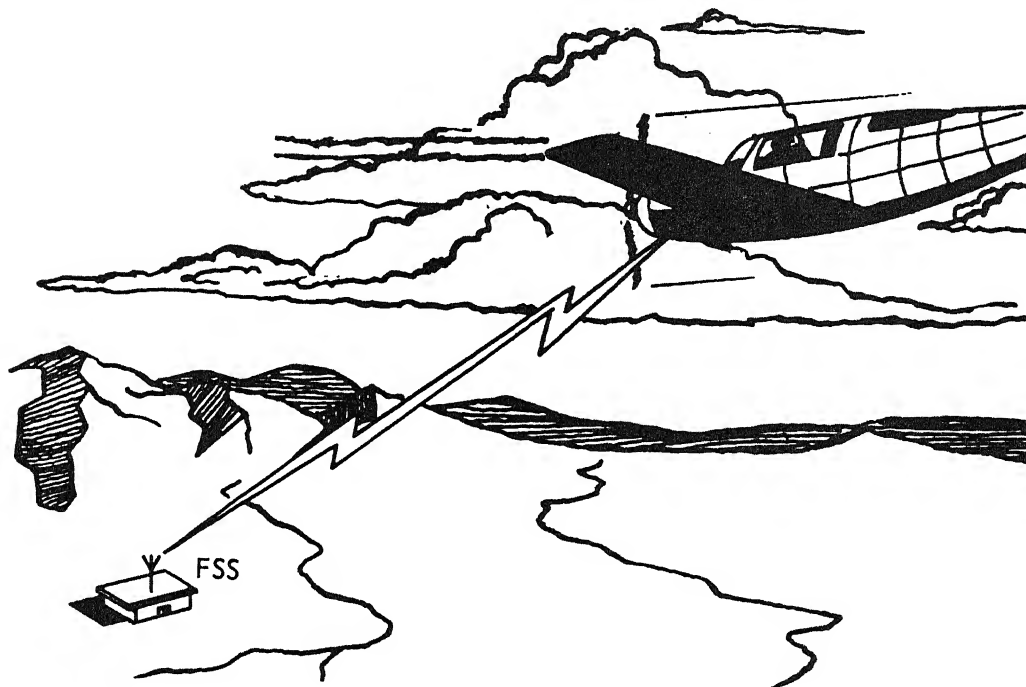

A pilot in the air desiring to file an instrument flight plan is encouraged to contact the nearest:


- ..... A. Center
- ..... B. Station.
- ..... C. Tower.

---

B.

---

After the station receives an IFR flight plan from the pilot, the specialist transmits the information to the center.

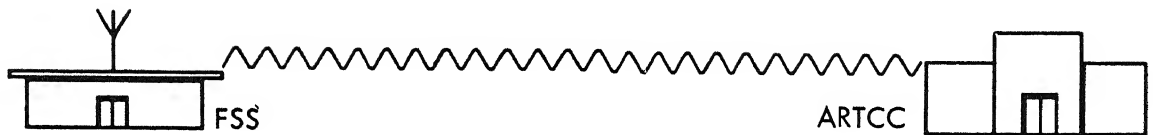


Who is responsible for sending IFR flight plan information to center?

.....

The station

Many pilots fly within controlled airspace during good weather conditions without filing a flight plan. These pilots fly VFR and the center is not responsible for their separation.

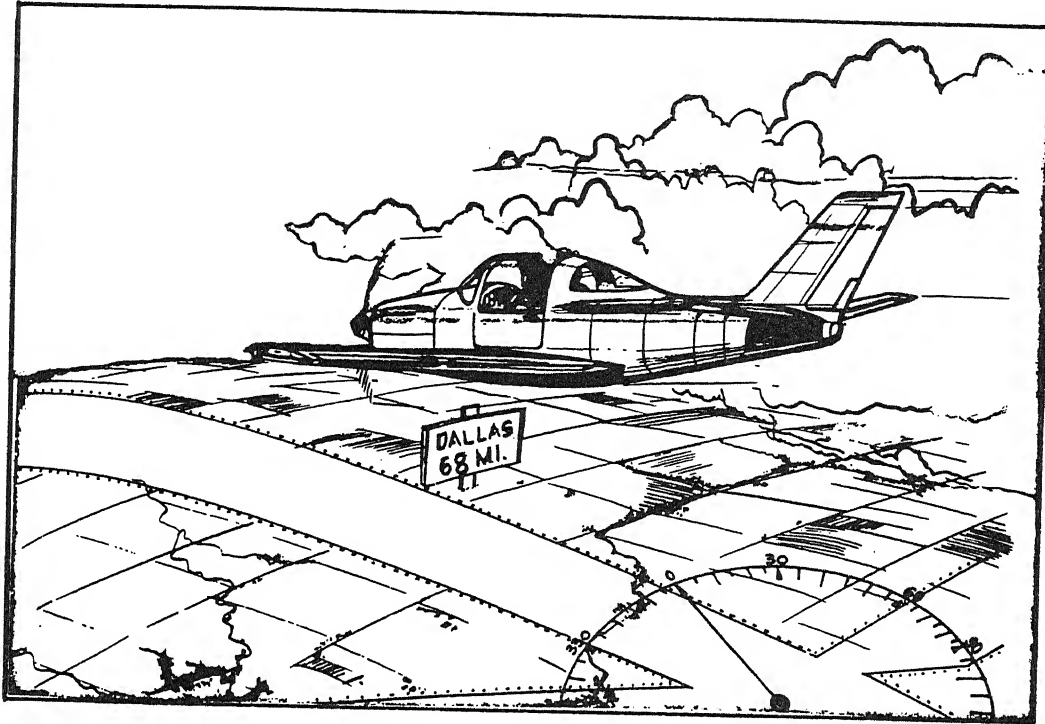

The illustration above shows a pilot operating VFR in controlled airspace without a flight plan. Who is responsible for preventing collisions?


- ..... A. Center
- ..... B. Station
- ..... C. Pilot
- ..... D. Tower

---

C.

---

A pilot may file an IFR flight plan in good weather and receive the same separation service as he would receive flying in poor weather.

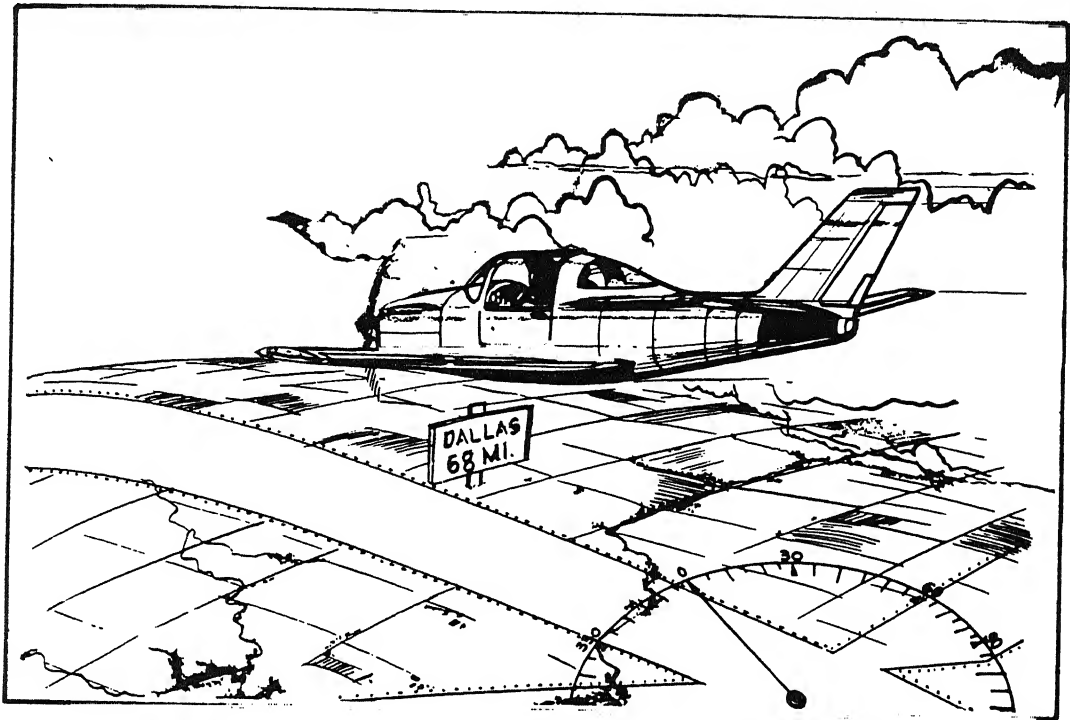

In order for a pilot to file an instrument flight plan there must exist along his route of flight areas of low ceilings and poor visibility.


- ..... A. True
- ..... B. False

---

B.

---

An IFR clearance is required prior to instrument flight within controlled airspace. A pilot may file an IFR flight plan at any time, regardless of weather conditions, and receive separation service.

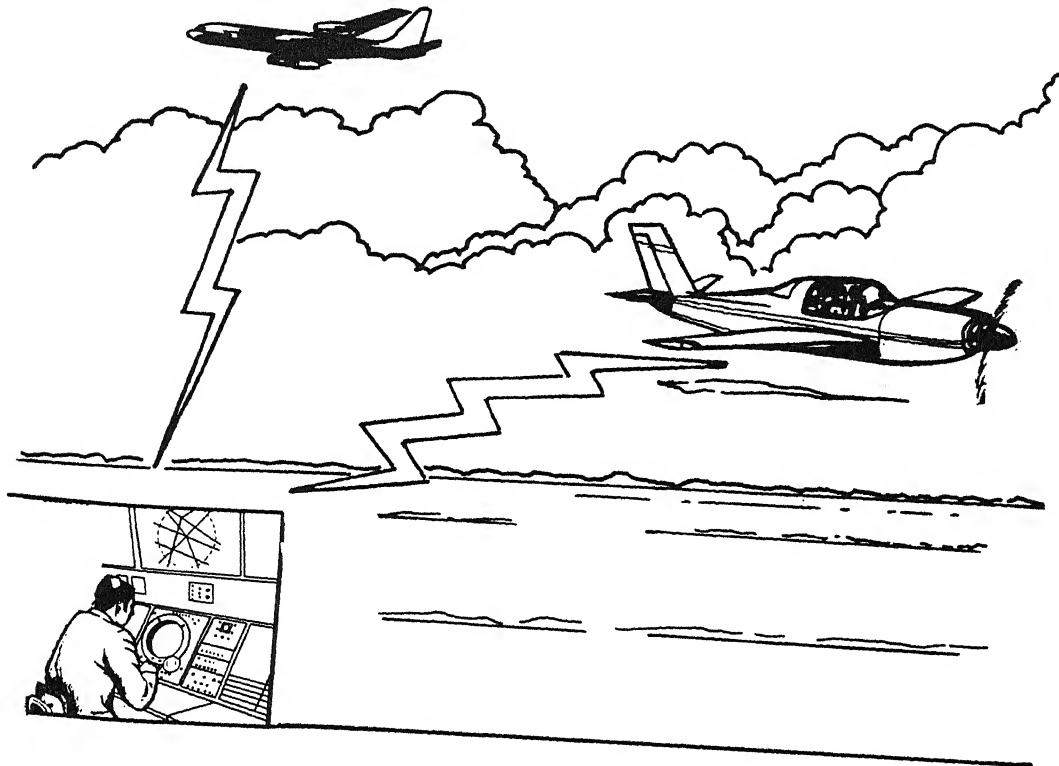

Prior to instrument flight along the airways, the pilot must receive:

- ..... A. A vector for radar identification.
- ..... B. Current weather reports.
- ..... C. An IFR clearance.


C.



260

An IFR clearance is authorization by ATC, for the purpose of preventing collisions between known aircraft, for an aircraft to proceed under specified traffic conditions within controlled airspace. If a tower is not located at the departure airport, the pilot should call the station for his IFR clearance prior to departure. The station then calls the center for a clearance and relays it to the pilot.

261

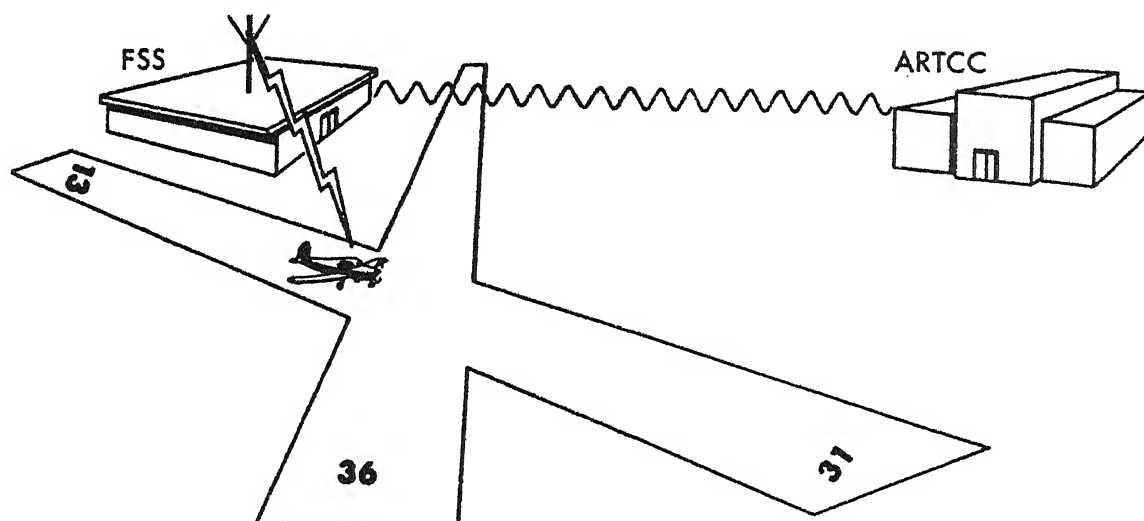

A pilot is departing from an airport that has a station but no tower. In order to receive an IFR clearance prior to departure, the pilot should contact the:

- ..... A. Station
- ..... B. Center
- ..... C. Airport manager

A.

The illustration below is an example of a verbal air traffic clearance issued by a center.

" ATC CLEARS AMERICAN ONE-FIFTY TO CINCINNATI AIRPORT  
VIA J SEVENTY-SEVEN, J TWELVE LOUISVILLE VICTOR FIVE  
HEBRON DIRECT MAINTAIN FLIGHT LEVEL TWO FIVE ZERO  
CONTACT FORT WORTH CENTER ON ONE TWO FIVE POINT  
FIVE AFTER DEPARTURE."

The above example of a clearance is based upon known traffic conditions along the intended route of flight. The clearance originated in a:

- ..... A. Tower
- ..... B. Station
- ..... C. Center

---

C.

---

SECTION 8  
BASIC CONCEPTS OF RADAR

---

263

Radar is probably the most important tool used today by center tower specialists to control air traffic. In this section you be exposed to the basic concepts of radar, what it looks like how it is used.

---

4

The underlined letters of the following words form the contraction of an aid to air traffic control. Radio Detection and Ranging. Write this contraction below.

.....

RADAR

5


In radar air traffic control, the controller must communicate directly with the pilot and observe the aircraft on radar.



One rule of radar air traffic control is that the controller must be in direct ..... with the pilot.

communication

Radar is used in all centers and certain designated approach control facilities to control air traffic. Centers use long-range radar and towers use medium range radar.

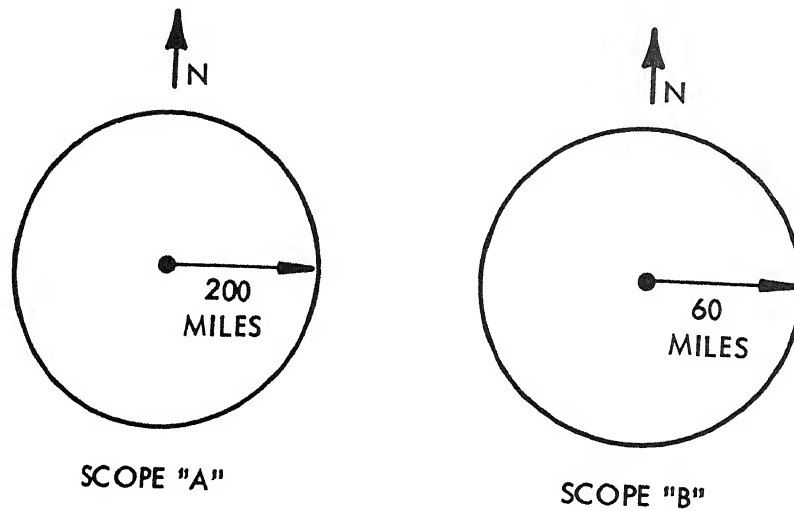

In the above illustration which radar scope would be used by a center?


.....

Scope "A"

The center of a radar scope represents the location of the radar antenna. In ATC, the term Main Bang is used to denote the radar antenna site.




This is a picture of a long range radar antenna as it appears at the installation site.

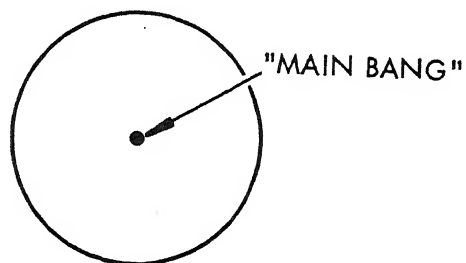

This spot in the center of the scope is called the main bang and represents the antenna site.

268

A line sweeps around the radar scope similar to the second hand on a watch.

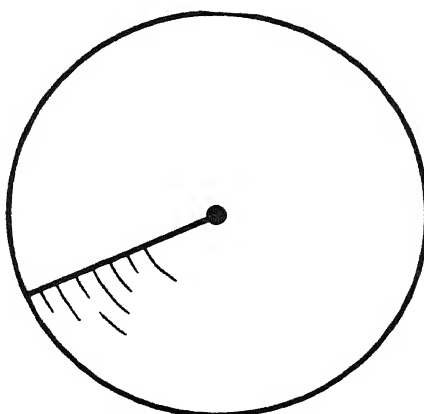

Look at the above illustration. In which direction is the sweep moving?


.....

---

Clockwise

269

The antenna emits a beam of radio energy which appears as the sweep on the face of the radar scope. When the beam strikes an object, part of the beam is reflected back to the antenna and appears as a bright spot on the scope. This bright spot is called a target.

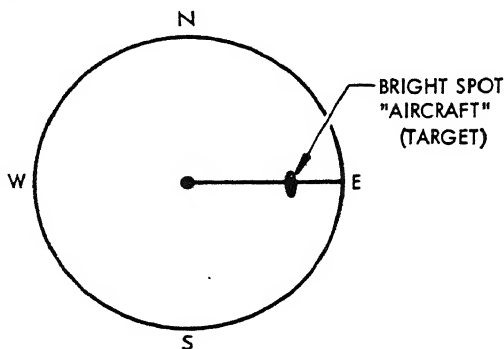

Look at the above illustration. In which direction would the aircraft fly to reach the main bang?


.....

---

West

270

The radar scope displays the location of an aircraft in relation to the main bang.

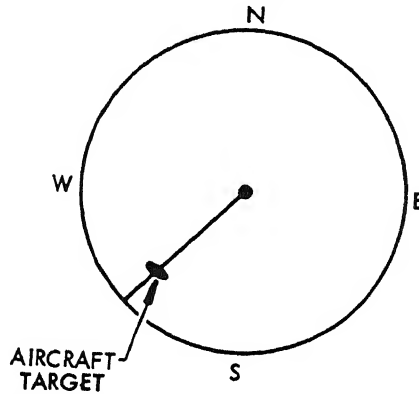


In the above illustration, what direction is the aircraft from the main bang.

.....

Southwest

271

A radar scope also provides distance information to the controller.



In the above picture the airplane is 30 miles from the main bang. How far apart are the range markers?


.....

10 miles



272

A radar scope furnishes the actual position of an aircraft to the air traffic specialist.

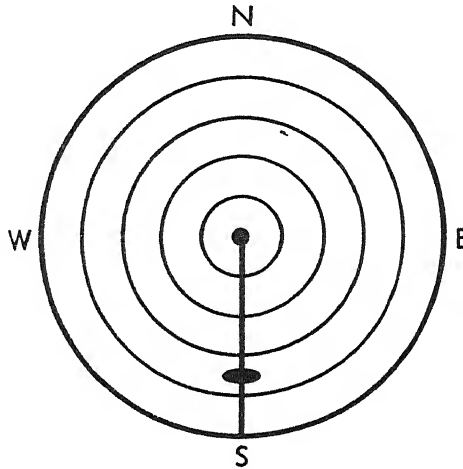

In the illustration above, what direction is the aircraft from the main bang?

.....


South

273

In the preceding illustration the range markers are spaced 10 miles apart. In which direction and how far would the aircraft have to fly to reach the "main bang"?

.....

North - 35 miles

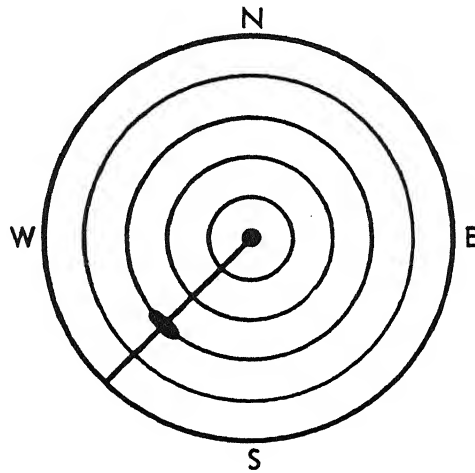

In the above illustration the range markers are 5 miles apart.  
What is the direction and distance of the aircraft from the main  
bang?

Southwest - 15 miles


275

Which of the following does radar provide about an aircraft?

- ..... A. Direction and height.
- ..... B. Distance and height.
- ..... C. Direction and distance.
- ..... D. Distance and speed.

C.

The en route center long range radar is called air route surveillance radar (ARSR).

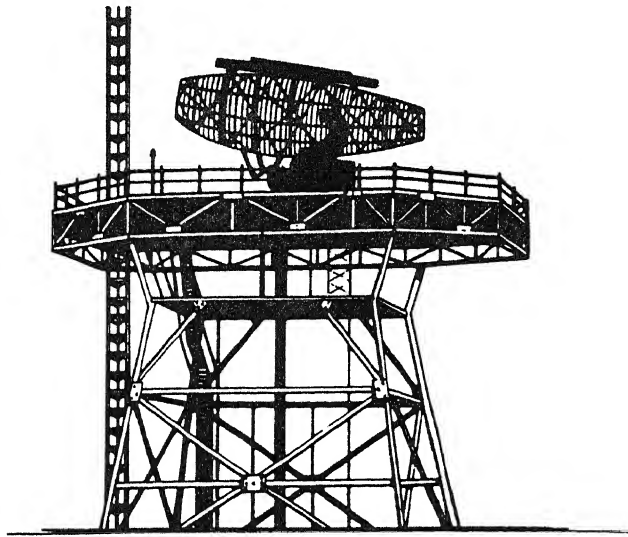


In normal operation, where is the ARSR main bang located on the radar scope?

.....

---

In the center of the scope.

---

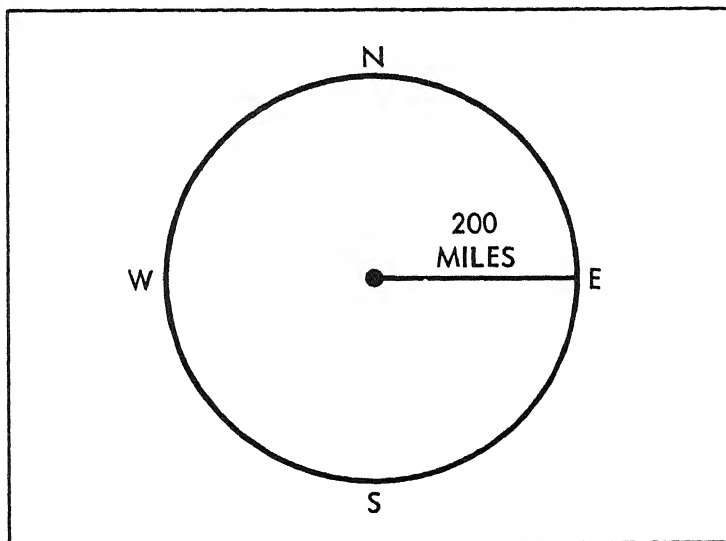

ARSR SCOPE

What is the distance from north to south on the ARSR scope shown above?


.....

---

400 miles

---

ARSR scopes show the controller the present location of the aircraft as well as a trail indicating several moments of elapsed flight. The largest and brightest target represents the current position of the aircraft.

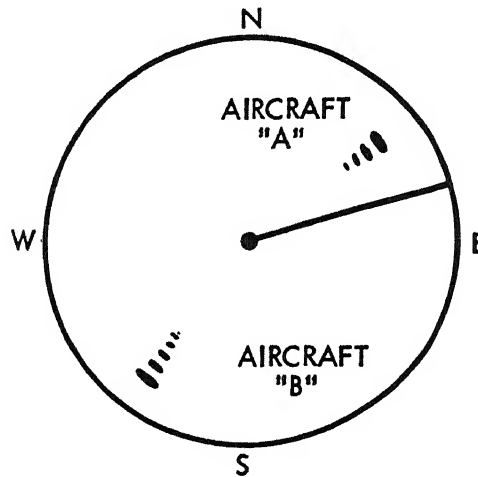


From the above illustration give the direction of flight for each aircraft.

.....  
.....

- 
1. Aircraft A - Northeast-bound
  2. Aircraft B - Southwest-bound
-

## RADAR SCOPES

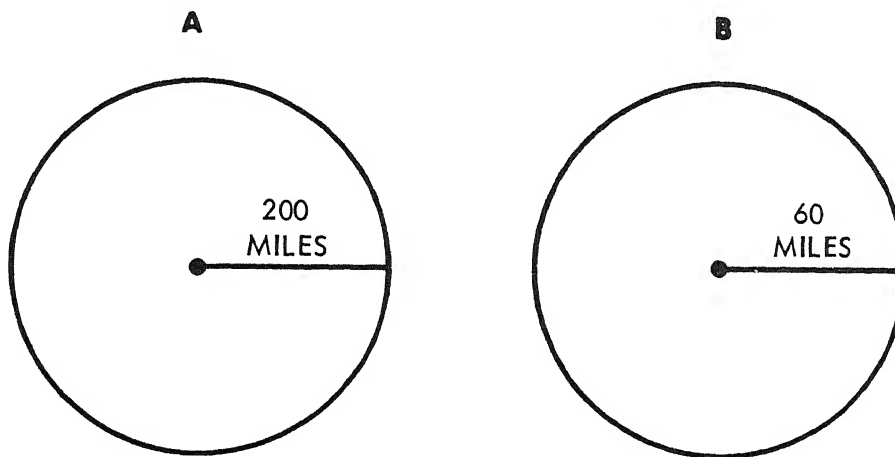

Identify the type of facility which uses:

A. ....

B. ....


---

A. Centers

B. Towers

---

The radar equipment used at a terminal facility is called airport surveillance radar (ASR). The radar equipment works on the same principle as air route surveillance radar.

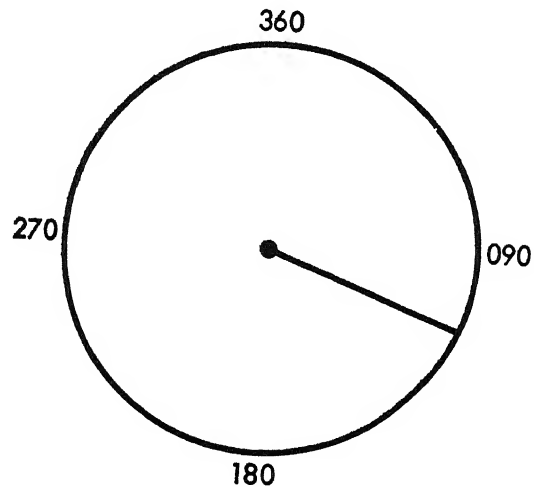

What items of information about an aircraft does the above ASR scope provide for the specialist?


.....

---

Distance (range) and direction (azimuth) information.

---

In the illustration below magnetic headings from 0° to 350° surround the edge of the ASR scope. This is known as a compass rose.

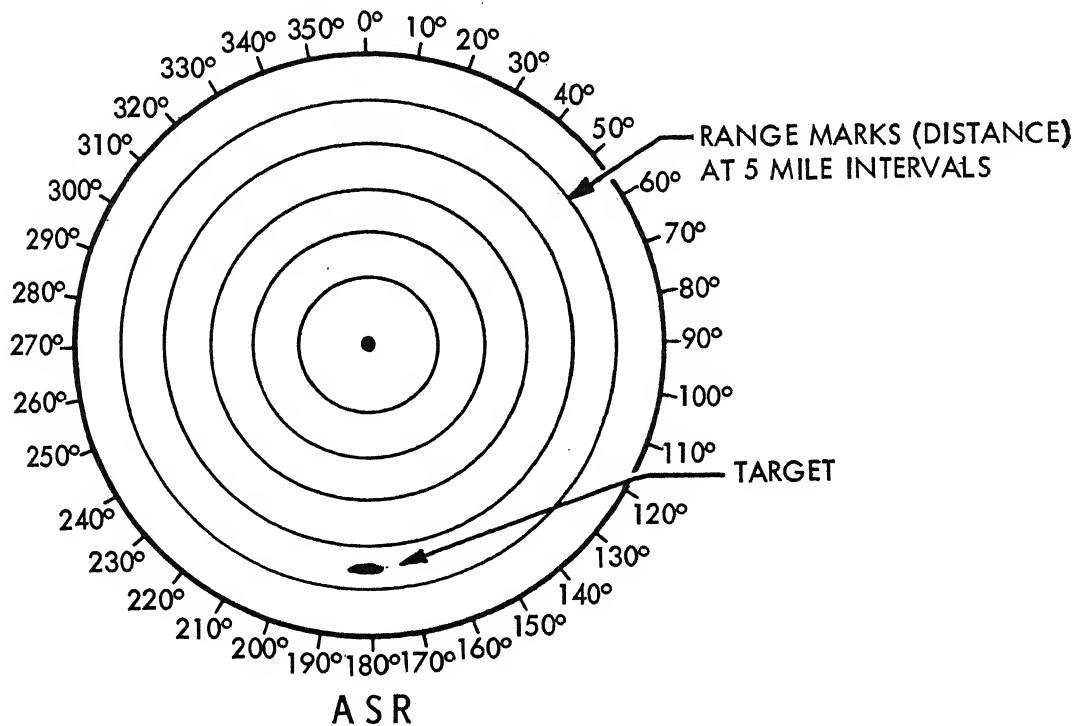

What is the target position in the distance and degree?


.....

---

23 miles at 180 degrees from the main bang.

---



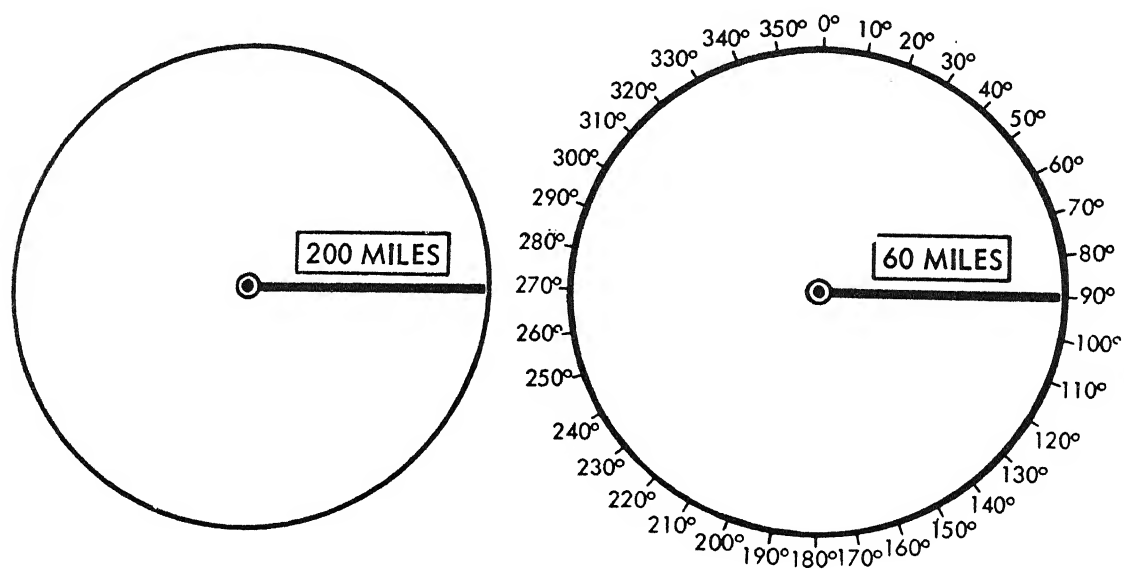


What feature appears on the ASR scope that is not a part of the ARSR scope pictured above?

.....

---

A compass rose.

---

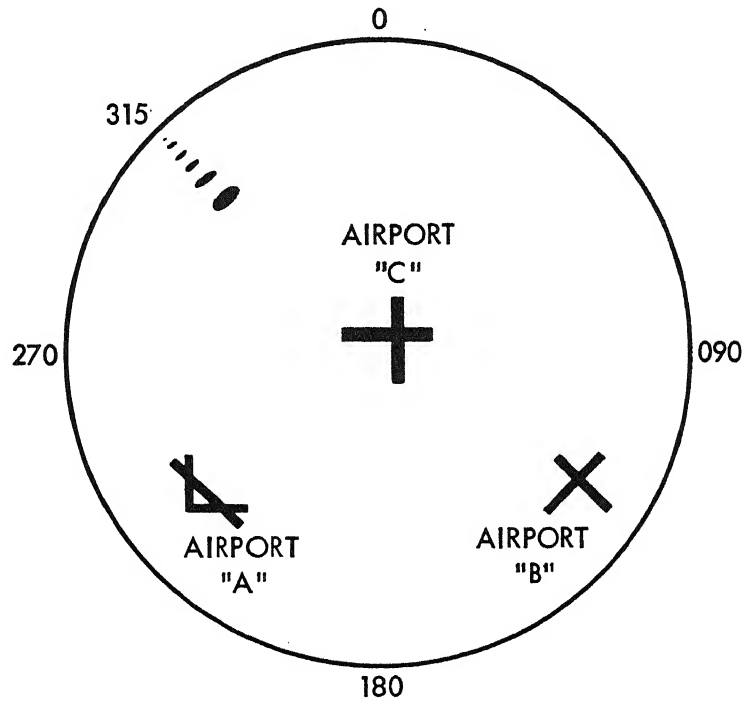

On the above ASR scope, the controller has identified the target shown. The pilots destination is airport "A" and the aircraft is presently on a 135-degree heading. What direction (in degrees) would the controller have the pilot fly to reach his destination?

.....


---

180 degrees

---

284

Radar detects aircraft in all directions. The illustration below shows an ASR scope at maximum range.

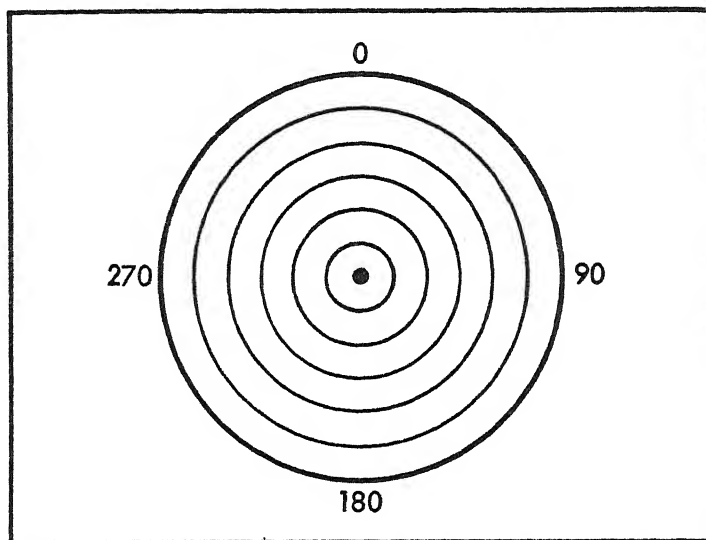

What is the distance between the range marks in the above picture?

.....

10 miles

285

What is the maximum distance an aircraft may be from an ASR antenna and still appear on the scope?

.....

60 miles

A terminal radar controller uses a scope placed in a slanted position.



What type of radar equipment is shown in the above illustration?

..... A. ASR


..... B. ARSR

---

A.

---

A few terminal facilities use precision approach radar (PAR). This type of radar provides direction, distance, and height information to the specialist.

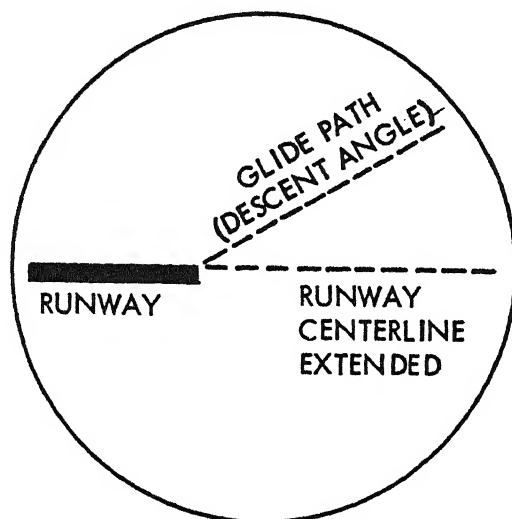

What additional information about an airplane does PAR give to the controller that ASR does not provide?


.....

---

Height of aircraft

---

PAR provides height information concerning an aircraft above or below a predetermined glidepath.

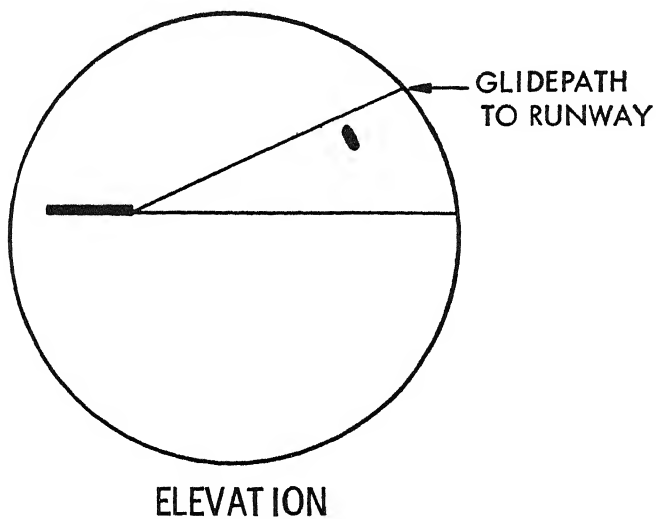


In the above illustration is the aircraft above or below the glide-path?

.....

Below

PAR provides directional information about an aircraft in relation to the extended runway centerline.

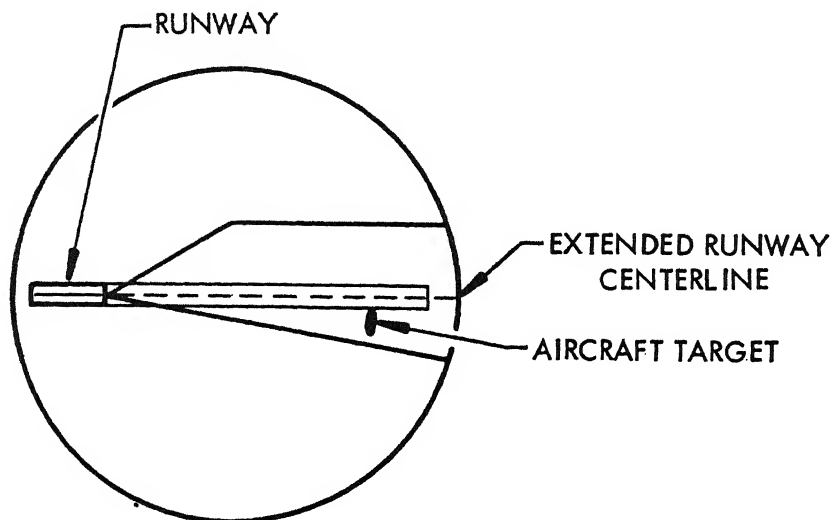

In the above picture, in which direction would the aircraft turn in order to return on course?

.....


-----

Turn to the right.

-----

290

PAR also provides the controller with the distance in miles of the aircraft from the runway in use. The maximum usable range of PAR is 10 miles.

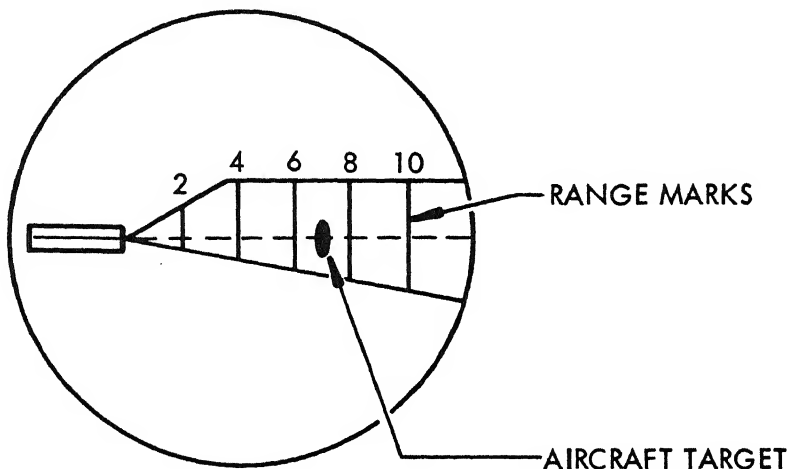

In the above illustration, how far is the target from the landing runway?

.....

7 miles.

291

What information does PAR give to the controller?

.....  
.....  
.....

Distance

Direction

Elevation



---

Identify the air traffic facilities associated with the following types of radar equipment:

- ..... A. ASR
- ..... B. ARSR
- ..... C. PAR

---

Terminals A.

Centers B.

Terminals C.

---

SECTION 9  
SEPARATION STANDARDS

---

293

You have seen the various kinds of radar systems used in air traffic control today. The use of radar has greatly increased the specialist's ability to control large numbers of aircraft. Since radar is subject to occasional malfunctions, the specialist must be prepared to continue controlling aircraft using nonradar techniques. These techniques involve the use of specific separation standards and are covered in this section.

---

Nonradar control requires greater airspace separation than radar control. The use of nonradar control results in wasted airspace. The illustration below shows two jets separated by 10 minutes (non-radar) and other jets separated by 5 miles (radar).



What is one of the primary advantages of radar control?

.....

-----

Radar enables the controller to place aircraft closer together.

-----

The following illustration shows two sets of aircraft being separated by different methods.

Figure A




Figure B



- A. Radar control is represented in Figure .....
- B. Nonradar control is represented in Figure .....


---

A. Figure B

B. Figure A

---

When nonradar control is being used, the controller uses strips on a board and relies on position reports from pilots to determine the aircraft's position. Since there is the possibility of human and instrument error in position calculation, the separation required between two aircraft under nonradar control is much greater than required for radar control.

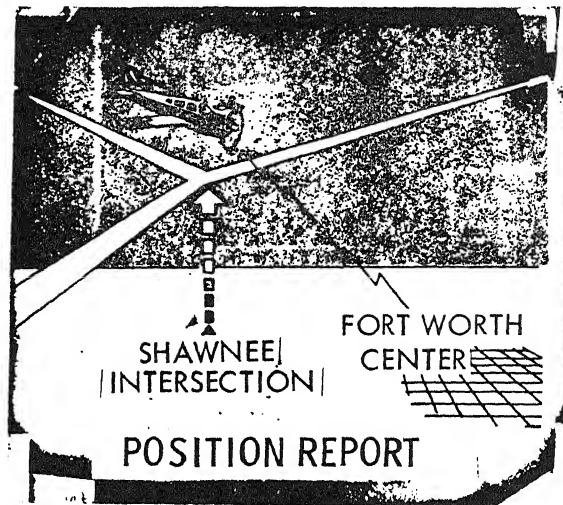

In the above figure the pilot reports to Fort Worth Center over the Shawnee Intersection. A second aircraft following behind the one shown above on the same route of flight cannot cross Shawnee, at the same altitude, until ten minutes later. This is an example of:


- ..... A. Radar control
- ..... B. Nonradar control

---

B.

---

The illustration below shows two aircraft separated by nonradar and two aircraft separated by radar as it would appear on a scope. In the illustration below, the range markers are five miles apart.

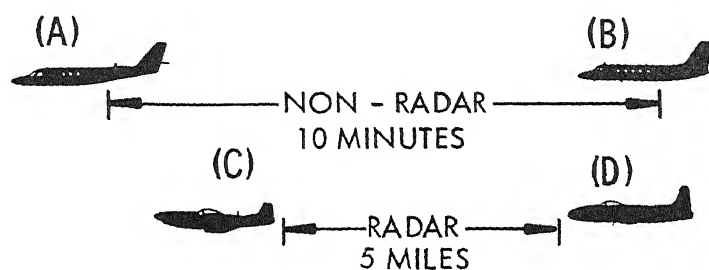


Which pair of aircraft is separated by radar?

..... A. Aircraft A & B.

..... B. Aircraft C & D.

B.

Radar enables a controller to reduce those separation standards required by nonradar control.

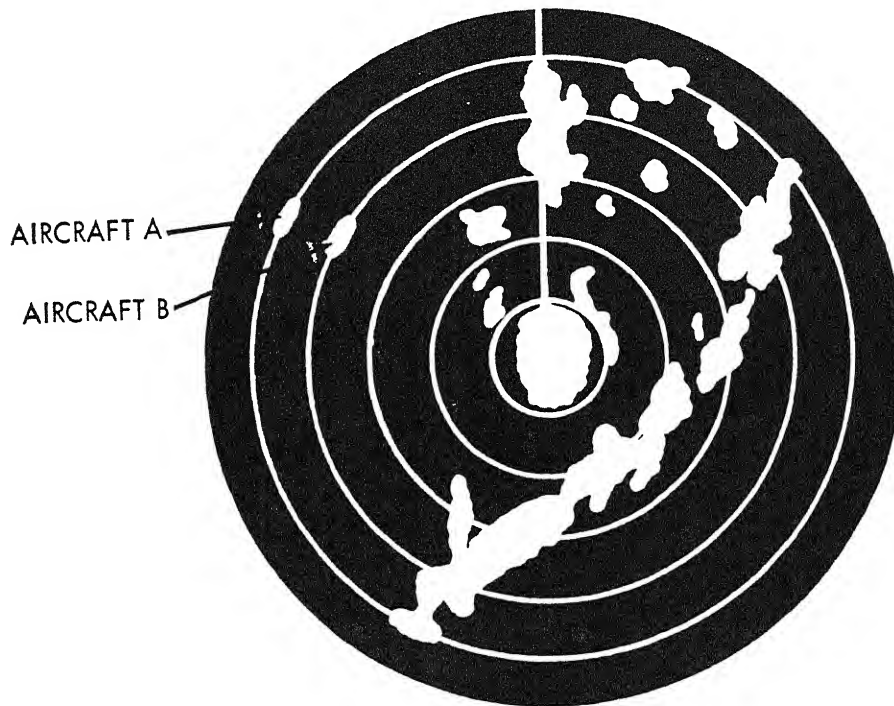


Aircraft A and B are both at the same altitude moving in the same direction. The two aircraft are five miles apart. The controller may keep these aircraft in this close proximity because he is separating them with .....

---

Radar

---

Several types of nonradar separation are used in providing control services. A controller provides either longitudinal, lateral, or vertical separation to aircraft under his control. Separation standards are designed to keep aircraft from infringing upon the airspace of other aircraft.

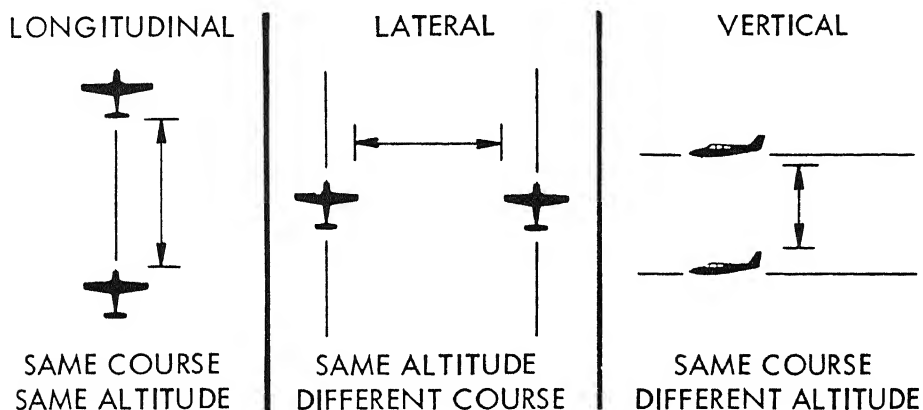

### TYPES OF SEPARATION

What kind of separation is being used when one aircraft is above the other?

.....

Vertical


What kind of separation is being used when one aircraft is following another at the same altitude?

.....

Longitudinal



Controllers may separate aircraft by assigning different altitudes to pilots flying IFR.

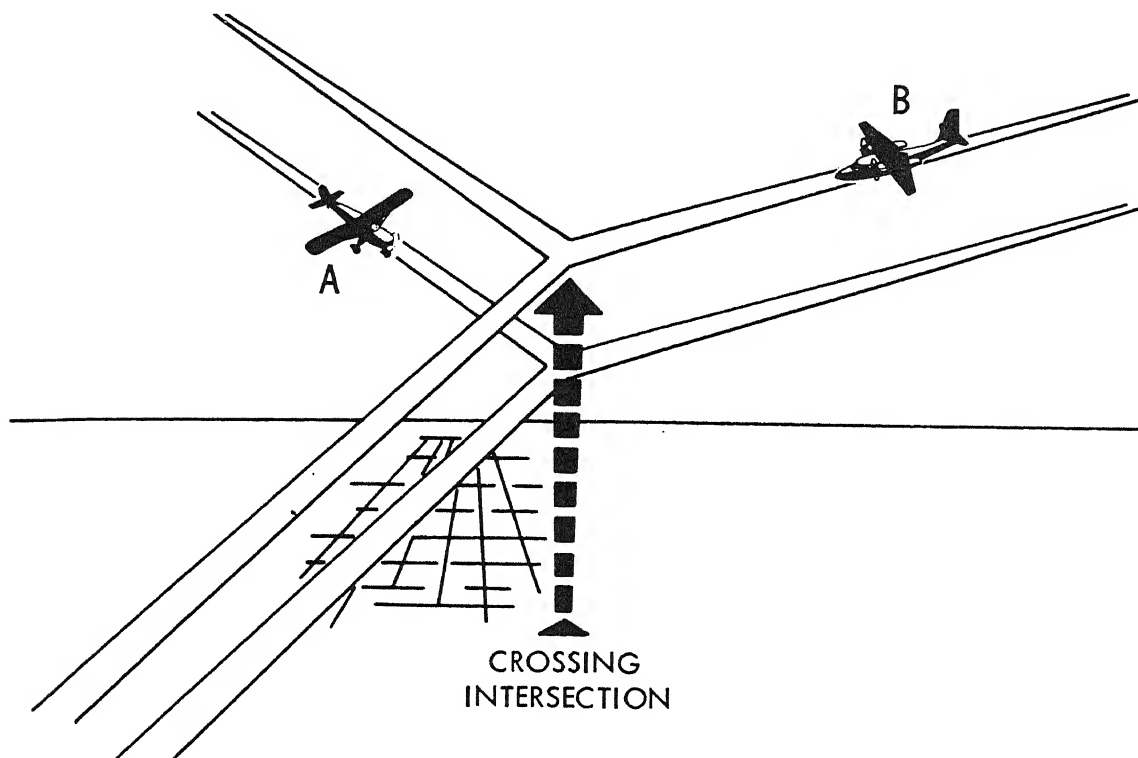


Aircraft "A" is heading southeast-bound at 5,000 feet and aircraft "B" is heading southwest-bound at 6,000 feet. They both arrive at the intersection at the same time. The type of nonradar separation being used is .....

Vertical

03

The picture below illustrates the longitudinal separation of aircraft.

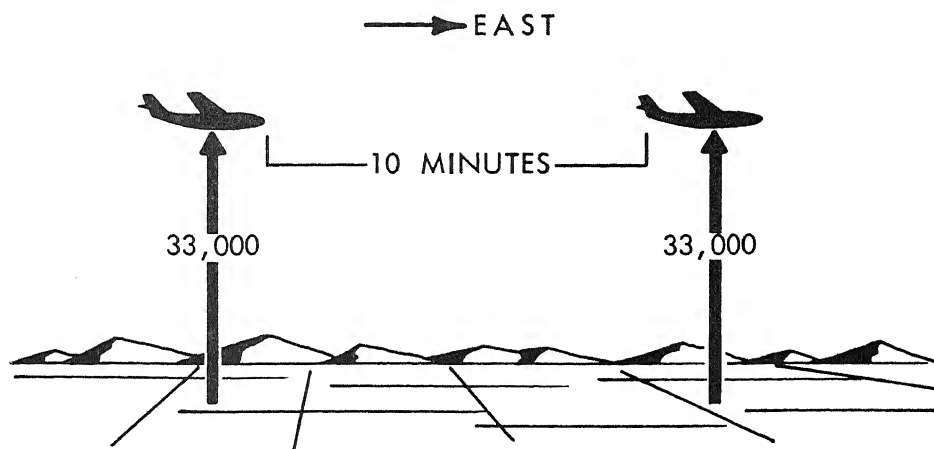

Describe all of the conditions in the above picture which illustrates the principles of longitudinal separation.

.....  
 .....  
 .....

1. Both aircraft are at the same altitude (33,000).
2. Both aircraft are heading in the same direction (East).
3. The aircraft are separated by 10 minutes flying time.

04

The aircraft in frame 303 are flying at the same altitude and in the same direction. What type of separation does this represent?

.....

Longitudinal separation

---

305

Two aircraft are flying in the same direction at the same altitude and on the same airway. What additional factor must be considered before the aircraft are longitudinally separated?

.....

---

Time (in minutes)

---

306

Name the principles involved in the application of longitudinal separation.

.....

.....

.....


---

Same altitude of flight

Same direction of flight



Separated by time

---

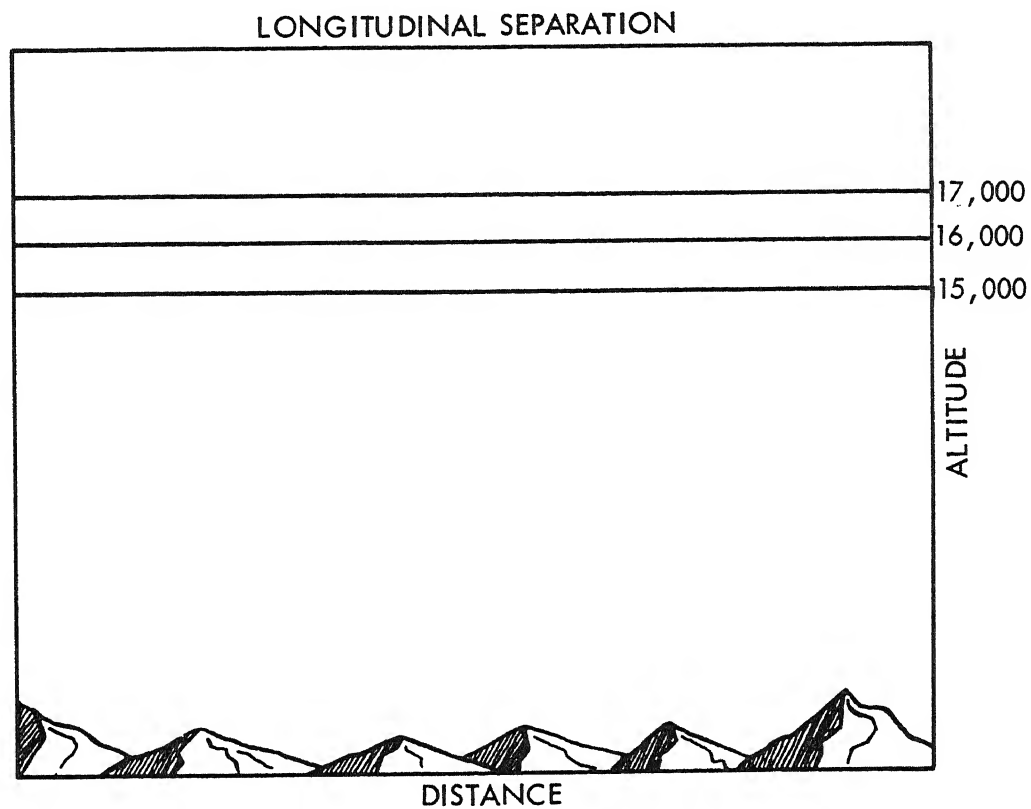

Draw two airplanes in the above picture to illustrate the principles of longitudinal separation.

---




308

In addition to vertical and longitudinal separation, controllers may also use lateral separation. Lateral separation is achieved by assigning aircraft, at the same altitude, different routes of flight.

Figure A



Figure B

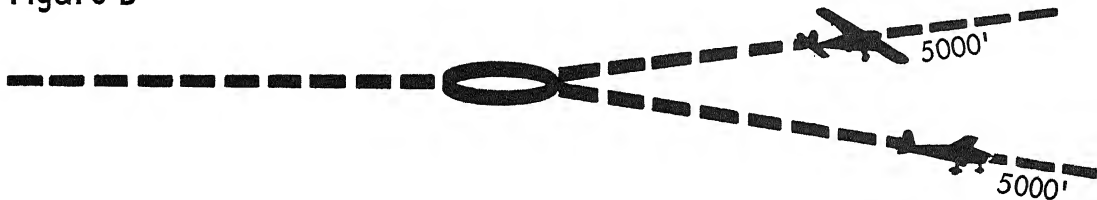

The aircraft in the above illustration are the same altitude. Lateral separation is represented in figure .....

B.

309

Two aircraft are flying at the same altitude and in the same direction on different airways. What type of separation is being used?

.....

Lateral separation

---

310

Two aircraft are flying on the same airway in opposite directions.  
What type of separation should be used?

.....

---

Vertical separation

---

311

Two aircraft are flying at the same altitude in opposite directions  
on different airways. What type of separation does this represent?

.....


---


Lateral separation

---

The three types of nonradar separation a controller may use are illustrated below.

A.  5000'

B.  4000'

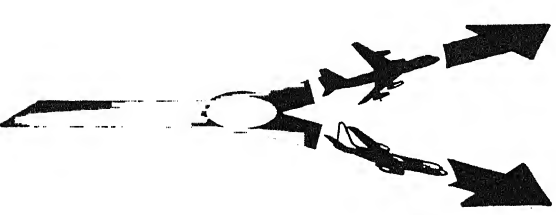C.  5000'

Label each type of separation.

..... A.

..... B.

..... C.

Longitudinal A.

Vertical B.

Lateral C.

SECTION 10  
FEDERAL AVIATION REGULATIONS

---

313

Earlier you learned that pilots must comply with the VFR or IFR rules depending on weather conditions. There are many other rules of flight with which pilots must comply. These rules are contained in the Federal Aviation Regulations. Since knowledge of these regulations is important to the specialist, this section of the workbook will serve to acquaint you with this area.

---



The FAA publishes and distributes the Federal Aviation Regulations (FARs). These regulations originated from the authority established by the Code of Federal Regulations. FARs are divided into parts and contain rules which establish and regulate the Air Traffic Control System. This is the title page of Part 91 of the Federal Aviation Regulations.

# Federal Aviation Regulations

## PART 91

### General Operating and Flight Rules

*Published March 1974*

**DEPARTMENT OF TRANSPORTATION  
FEDERAL AVIATION ADMINISTRATION**



Part 91 of the FARs contains regulations which pertain to the movement of air traffic. As an Air Traffic Control Specialist you will be interested in this part of the FARs.

## Part 91—General Operating and Flight Rules

Section	Contents	Page
Preambles	-----	P-1
<b>Subpart A—General</b>		
91.1	Applicability -----	1
91.2	Certificate of authorization for certain Category II operations -----	1
91.3	Responsibility and authority of the pilot in command -----	1
91.4	Pilot in command of aircraft requiring more than one required pilot -----	1
91.5	Preflight action -----	1
91.6	Category II operation: general operating rules -----	2
91.7	Flight crewmembers at stations -----	2
91.8	Prohibition against interference with crewmembers -----	2
91.9	Careless or reckless operation -----	3
91.10	Careless or reckless operation other than for the purpose of air navigation -----	3
91.11	Liquor and drugs -----	3
91.12	Carriage of narcotic drugs, marihuana, and depressant or stimulant drugs or substances -----	3
91.13	Dropping objects -----	3
91.14	Fastening of safety belts -----	3
91.15	Parachutes and parachuting -----	3
91.17	Towing: gliders -----	4
91.18	Towing: other than under § 91.17 -----	5
91.19	Portable electronic devices -----	5
91.21	Flight instruction; simulated instrument flight and certain flight tests -----	5
91.23	Fuel requirements for flight in IFR conditions -----	5
91.24	ATC transponder equipment -----	6
91.25	VOR equipment check for IFR operations -----	6
91.27	Civil aircraft: certifications required -----	7
91.28	Special flight authorizations for foreign civil aircraft -----	7
91.29	Civil aircraft airworthiness -----	8
91.31	Civil aircraft operating limitations and marking requirements -----	8
91.32	Supplemental oxygen -----	9
91.33	Powered civil aircraft with standard category U.S. airworthiness certificates; instrument and equipment requirements -----	9
91.34	Category II manual -----	11
91.35	Flight recorders and cockpit voice recorders -----	11
91.36	Data correspondence between automatically reported pressure altitude data and the pilot's altitude reference -----	11
91.37	Transport category civil airplanes weight limitations -----	11
91.38	Increased maximum certificated weights for certain airplanes operated in Alaska -----	12
91.39	Restricted category civil aircraft; operating limitations -----	13
91.40	Limited category civil aircraft; operating limitations -----	13
91.41	Provisionally certificated civil aircraft; operating limitations -----	13
91.42	Aircraft having experimental certificates; operating limitations -----	14
91.43	Special rules for foreign civil aircraft -----	15

## READ EACH TITLE UNDER SUBPART B

**Contents—Continued**

<i>Section</i>		<i>Page</i>
91.45	Authorization for ferry flight with one engine inoperative by air carriers and commercial operators of large aircraft -----	16
91.47	Emergency exits for airplanes carrying passengers for hire --	18
91.49	Aural speed warning device -----	19
91.51	Altitude alerting system or device; turbojet powered civil airplanes -----	19
91.52	Emergency locator transmitters -----	19
91.53	Report on identification and activity of aircraft -----	21
91.54	Truth in leasing clause requirement in leases and conditional sales contracts -----	21
91.55	Civil aircraft sonic boom -----	22
 <b>Subpart B—Flight Rules</b>		
<b>GENERAL</b>		
91.61	Applicability -----	22
91.63	Waivers -----	22
91.65	Operating near other aircraft -----	22
91.67	Right-of-way rules; except water operations -----	22
91.69	Right-of-way rules; water operations -----	23
91.70	Aircraft speed -----	23
91.71	Acrobatic flight -----	24
91.73	Aircraft lights -----	24
91.75	Compliance with ATC clearances and instructions -----	24
91.77	ATC light signals -----	24
91.79	Minimum safe altitudes; general -----	24
91.81	Altimeter settings -----	25
91.83	Flight plan; information required -----	25
91.84	Flights between Mexico or Canada and the United States -----	26
91.85	Operating on or in the vicinity of an airport; general rules --	26
91.87	Operation at airports with operating control towers -----	26
91.89	Operation at airports without control towers -----	27
91.90	Terminal control areas -----	28
91.91	Temporary flight restrictions -----	29
91.93	Flight test areas -----	30
91.95	Restricted and prohibited areas -----	30
91.97	Positive control areas and route segments -----	30
91.99	Jet advisory areas -----	30
91.101	Operations to, or over, Cuba -----	31
91.102	Flight limitation in the proximity of space flight recovery operations -----	31
91.103	Operation of civil aircraft of Cuban registry -----	31
91.104	Flight restrictions in the proximity of the Presidential and other parties -----	31
 <b>VISUAL FLIGHT RULES</b>		
91.105	Basic VFR weather minimums -----	32
91.107	Special VFR weather minimums -----	32
91.109	VFR cruising altitude or flight level -----	33
 <b>INSTRUMENT FLIGHT RULES</b>		
91.115	ATC clearance and flight plan required -----	33
91.116	Takeoff and landing under IFR: general -----	33
91.117	Limitations on use of instrument approach procedures (other than Category II) -----	34
91.119	Minimum altitudes for IFR operations -----	35
91.121	IFR cruising altitude or flight level -----	36
91.123	Course to be flown -----	36
91.125	IFR, radio communications -----	36

---

317

What does Subpart B cover? Refer to frame 316.

.....  
.....  
.....

---

Flight Rules

---

318

As an Air Traffic Control Specialist, you are more concerned with Subpart A or Subpart B? Refer to frame 315 and 316.

.....

---

Subpart B

---

## SAMPLE PAGE OF PART 91, SCAN

## PART 91

## GENERAL OPERATING AND FLIGHT RULES

23

so as to see and avoid other aircraft in compliance with this section. When a rule of this section gives another aircraft the right of way, he shall give way to that aircraft and may not pass over, under, or ahead of it, unless well clear.

(b) *In distress.* An aircraft in distress has the right of way over all other air traffic.

(c) *Converging.* When aircraft of the same category are converging at approximately the same altitude (except head-on, or nearly so) the aircraft to the other's right has the right of way. If the aircraft are of different categories—

(1) A balloon has the right of way over any other category of aircraft;

(2) A glider has the right of way over an airship, airplane or rotorcraft; and

(3) An airship has the right of way over an airplane or rotorcraft.

However, an aircraft towing or refueling other aircraft has the right of way over all other engine-driven aircraft.

(d) *Approaching head-on.* When aircraft are approaching each other head-on, or nearly so, each pilot of each aircraft shall alter course to the right.

(e) *Overtaking.* Each aircraft that is being overtaken has the right of way and each pilot of an overtaking aircraft shall alter course to the right to pass well clear.

(f) *Landing.* Aircraft, while on final approach to land, or while landing, have the right of way over other aircraft in flight or operating on the surface. When two or more aircraft are approaching an airport for the purpose of landing, the aircraft at the lower altitude has the right of way, but it shall not take advantage of this rule to cut in front of another which is on final approach to land, or to overtake that aircraft.

(g) *Inapplicability.* This section does not apply to the operation of an aircraft on water.

#### § 91.69 Right-of-way rules; water operations.

(a) *General.* Each person operating an aircraft on the water shall, insofar as possible, keep clear of all vessels and avoid impeding

their navigation, and shall give way to any vessel or other aircraft that is given the right of way by any rule of this section.

(b) *Crossing.* When aircraft, or an aircraft and a vessel are on crossing courses, the aircraft or vessel to the other's right has the right of way.

(c) *Approaching head-on.* When aircraft, or an aircraft and a vessel, are approaching head-on or nearly so, each shall alter its course to the right to keep well clear.

(d) *Overtaking.* Each aircraft or vessel that is being overtaken has the right of way, and the one overtaking shall alter course to keep well clear.

(e) *Special circumstances.* When aircraft, or an aircraft and a vessel, approach so as to involve risk of collision, each aircraft or vessel shall proceed with careful regard to existing circumstances, including the limitations of the respective craft.

#### § 91.70 Aircraft speed.

(a) Unless otherwise authorized by the Administrator, no person may operate an aircraft below 10,000 feet MSL at an indicated airspeed of more than 250 knots (288 m.p.h.).

(b) Unless otherwise authorized or required by ATC, no person may operate an aircraft within an airport traffic area at an indicated airspeed of more than—

(1) In the case of a reciprocating engine aircraft, 156 knots (180 m.p.h.); or

(2) In the case of a turbine-powered aircraft, 200 knots (230 m.p.h.).

Paragraph (b) does not apply to any operations within a Terminal Control Area. Such operations shall comply with paragraph (a) of this section.

(c) No person may operate aircraft in the airspace beneath the lateral limits of any terminal control area at an indicated airspeed of more than 200 knots (230 m.p.h.).

However, if the minimum safe airspeed for any particular operation is greater than the maximum speed prescribed in this section, the aircraft may be operated at that minimum speed.

**§ 91.71 Acrobatic flight.**

No person may operate an aircraft in acrobatic flight—

- (a) Over any congested area of a city, town, or settlement;
- (b) Over an open air assembly of persons;
- (c) Within a control zone or Federal airway;
- (d) Below an altitude of 1,500 feet above the surface; or
- (e) When flight visibility is less than three miles.

For the purposes of this section, acrobatic flight means an intentional maneuver involving an abrupt change in an aircraft's attitude, an abnormal attitude, or abnormal acceleration, not necessary for normal flight.

**§ 91.73 Aircraft lights.**

No person may, during the period from sunset to sunrise (or, in Alaska, during the period a prominent unlighted object cannot be seen from a distance of three statute miles or the sun is more than six degrees below the horizon)—

- (a) Operate an aircraft unless it has lighted position lights;
- (b) Park or move an aircraft in, or in dangerous proximity to, a night flight operations area of an airport unless the aircraft—
  - (1) Is clearly illuminated;
  - (2) Has lighted position lights; or
  - (3) Is in an area which is marked by obstruction lights; or
- (c) Anchor an aircraft unless the aircraft—
  - (1) Has lighted anchor lights; or
  - (2) Is in an area where anchor lights are not required on vessels.

**§ 91.75 Compliance with ATC clearances and instructions.**

(a) When an ATC clearance has been obtained, no pilot in command may deviate from that clearance, except in an emergency, unless he obtains an amended clearance. However, except in positive controlled airspace, this paragraph does not prohibit him from cancel-

ling an IFR flight plan if he is operating in VFR weather conditions.

(b) Except in an emergency, no person may, in an area in which air traffic control is exercised, operate an aircraft contrary to an ATC instruction.

(c) Each pilot in command who deviates, in an emergency, from an ATC clearance or instruction shall notify ATC of that deviation as soon as possible.

(d) Each pilot in command who (though not deviating from a rule of this subpart) is given priority by ATC in an emergency, shall, if requested by ATC, submit a detailed report of that emergency within 48 hours to the chief of that ATC facility.

**§ 91.77 ATC light signals.**

ATC light signals have the meaning shown in the following table.

Color and type of signal	Meaning with respect to aircraft on the surface	Meaning with respect to aircraft in flight
Steady green.....	Cleared for takeoff....	Cleared to land.
Flashing green.....	Cleared to taxi.....	Return for landing (to be followed by steady green at proper time)
Steady red.....	Stop.....	Give way to other aircraft and continue circling
Flashing red.....	Taxi clear of runway in use.	Airport unsafe—do not land.
Flashing white.....	Return to starting point on airport.	Not applicable.
Alternating red and green.	Exercise extreme caution.	Exercise extreme caution.

**§ 91.79 Minimum safe altitudes; general.**

Except when necessary for takeoff or landing, no person may operate an aircraft below the following altitudes:

(a) *Anywhere.* An altitude allowing, if a power unit fails, an emergency landing without undue hazard to persons or property on the surface.

(b) *Over congested areas.* Over any congested area of a city, town, or settlement, or over any open air assembly of persons, an altitude of 1,000 feet above the highest obstacle within a horizontal radius of 2,000 feet of the aircraft.

---

321

What is the subject of paragraph 91.69? Refer to frame 319.

.....

---

Right of way rules, water operations.

---

322

What subject is covered under paragraph 91.5? Refer to frame 315.

.....

---


Preflight action

---

323

General operating and flight rules define the actions and responsibilities of pilots in their conduct and operation of aircraft. These rules state the requirements for aircraft right of way, operating in an unsafe manner, acrobatic flights, fuel requirements, etc.

---

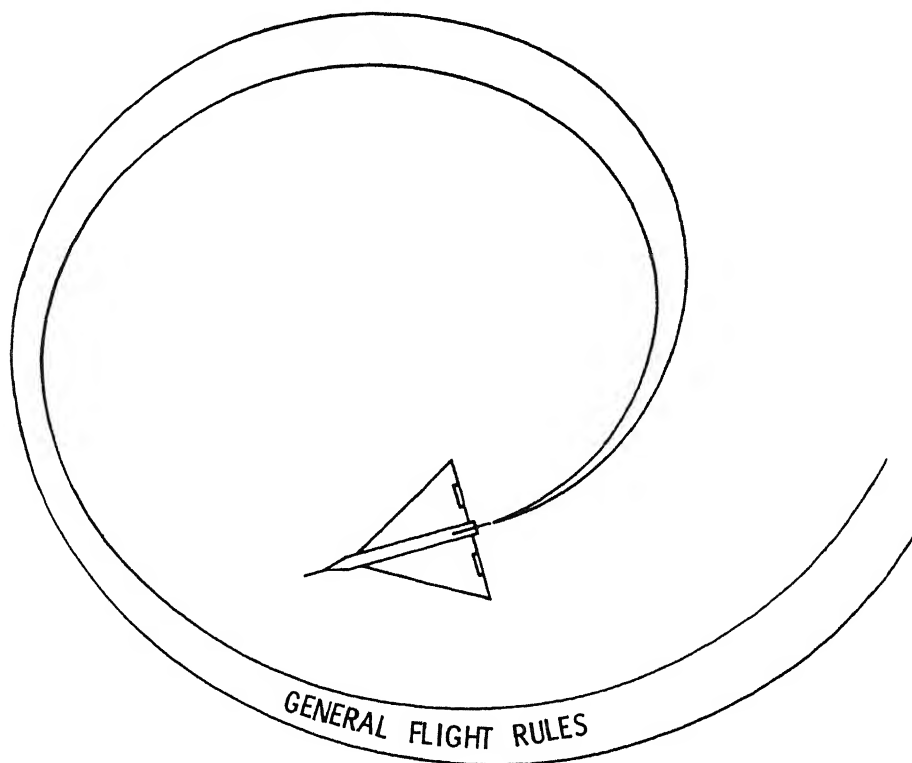

Volume VI, Part 91 - General Operating and Flight Rules contain which of the following subjects?

- ..... A. Flight Rules
- ..... B. Controllers' responsibilities
- ..... C. Pilots' responsibilities
- ..... D. Visual Flight Rules (VFR)
- ..... E. Instrument Flight Rules (IFR)

---

A.

C.

D.

E.



---

325

What does Part 91.3 cover? Refer to frame 315.

.....

---

Responsibility and authority of the pilot in command.

---

326

What does Part 91.75 cover? Refer to frame 316.

.....

---

Compliance with ATC clearances and instructions.

---

327

When may a pilot deviate from a clearance? Refer to frame 320.

..... A. At his discretion

..... B. In an emergency

..... C. Under no conditions

---

B.

---

FAA encourages VFR pilots to contact Air Route Traffic Control Centers, Towers, and Flight Service Stations for traffic advisory service. It is, therefore, necessary for an Air Traffic Control Specialist to be aware of the pilot's requirements for VFR flight.

FAR Part 65 covers certification of airmen, other than flight crew members, and air traffic control tower operators. Illustrated below is the title page of Part 65.

## **Federal Aviation Regulations**

### **PART 65**

#### **Certification: Airmen Other Than Flight Crewmembers**

*Published September 1974*

**DEPARTMENT OF TRANSPORTATION  
FEDERAL AVIATION ADMINISTRATION**



By now, you should have received a medical certificate like the one below.

UNITED STATES OF AMERICA  
DEPARTMENT OF TRANSPORTATION  
FEDERAL AVIATION ADMINISTRATION

**MEDICAL CERTIFICATE SECOND CLASS**

THIS CERTIFIES THAT (Full name and address)						
JOHN Q. PUBLIC 2241 S. W. 18th Oklahoma City, Oklahoma 73129						
DATE OF BIRTH	HEIGHT	WEIGHT	HAIR	EYES	SEX	
5-6-70	67"	185	Blonde	Blue	Male	
has met the medical standards prescribed in Part 67, Federal Aviation Regulations for this class of Medical Certificate.						
None						
DATE OF EXAMINATION				EXAMINER'S SERIAL NO.		
10 June 1976				0876-056-1		
EXAMINER'S SIGNATURE <i>John H. Doe, M.D.</i>						
TYPED NAME John H. Doe, M.D.						
AIRMAN'S SIGNATURE <i>John Q. Public</i>						

FAA FORM 8500-9 (1-67) SUPERSEDES FAA FORM 1004-1

#### CONDITIONS OF ISSUE

This certificate shall be in the personal possession of the airman at all times while exercising the privileges of his airman certificate. Unless modified or recalled within 60 days from date of issue, this certificate becomes valid for the time limits specified below:

- a. FIRST CLASS - SIX calendar months for those operations requiring a First Class Medical Certificate; TWELVE calendar months for those operations requiring only a Second Class Medical Certificate; or, TWENTY-FOUR calendar months for those operations requiring only a Third Class Medical Certificate.
- b. SECOND CLASS - TWELVE calendar months for those operations requiring a Second Class Medical Certificate; or, TWENTY-FOUR calendar months for those operations requiring only a Third Class Medical Certificate.
- c. THIRD CLASS - TWENTY-FOUR calendar months for those operations requiring a Third Class Medical Certificate.

#### OPERATION DURING PHYSICAL DEFICIENCY

The holder of this certificate is governed by the provisions of FAR Secs. 61.45, 63.19, and 65.45(c) relating to physical deficiency.

#### NOTICE

Any alteration of this certificate is punishable by a fine not exceeding \$1,000, or imprisonment not exceeding 3 years, or both.

A second class medical certificate is valid for 12 months and expires on the last day of the month in which issued. Look at the illustration above. When does the certificate expire?

10 June 1977

Part 71 of the FARs covers the designation of Federal Airways, Area Low Routes, Controlled Airspace, and Reporting Points. This is the title page of Part 71.

## Federal Aviation Regulations

### PART 71

#### Designation of Federal Airways, Area Low Routes, Controlled Airspace, and Reporting Points

*Published January 1975*

DEPARTMENT OF TRANSPORTATION  
FEDERAL AVIATION ADMINISTRATION



Which publication contains information concerning a pilot's responsibilities for operating aircraft within the United States?

.....

-----  
FARs  
-----

A thorough knowledge of FARs is necessary so that Air Traffic Control Specialists will not issue instructions which could cause a pilot to violate these regulations. You have learned that the FARs contain the rules and policies which regulate the Air Traffic Control System. Many other directives and manuals have been developed to expand upon the FARs. You must become familiar with these additional publications which govern the operation of the Air Traffic Control System.

---

## SECTION 11

### FAA HANDBOOKS AND PUBLICATIONS

---

334

As an Air Traffic Control Specialist you will be guided in many cases by written instructions in the form of handbooks. In this section you will be given examples of many of the handbooks you will use in your training and career in Air Traffic Service.

---

## Section 11

### FAA HANDBOOKS AND PUBLICATIONS


---

335

As an Air Traffic Control Specialist you will be guided in many cases by written instructions in the form of handbooks. So that all specialists will interpret these publications in the same manner, it is important to learn the specific meaning of certain words and phrases as used in these handbooks. In this section you will be given examples of specific word usage.

---

Certain words in FAA Handbooks are assigned specific meanings so that all Air Traffic Control Specialists will interpret them in the same manner.

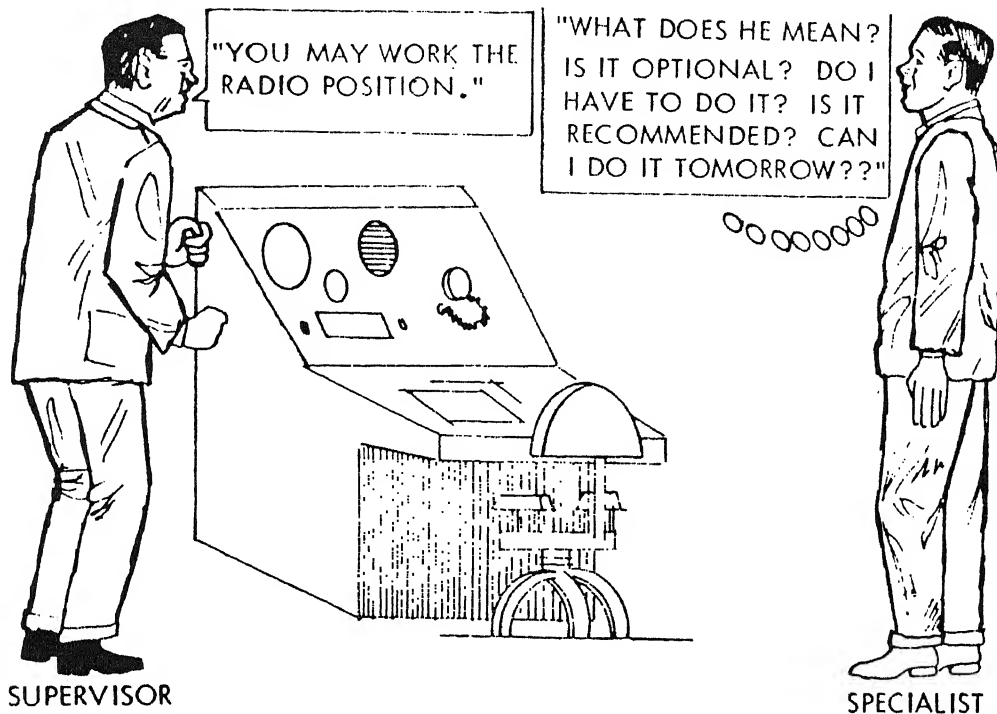

What is the possible consequence of using words whose meanings are not clearly defined?

.....

---

Misinterpretation

---



"Shall" means a procedure is mandatory.

" YOU SHALL USE AUTHORIZED  
PROCEDURES "



SPECIALIST

Look at the illustration. Which words indicate a mandatory procedure?


.....

---

Shall use

---

Sometimes the word shall is not spoken but is implied.

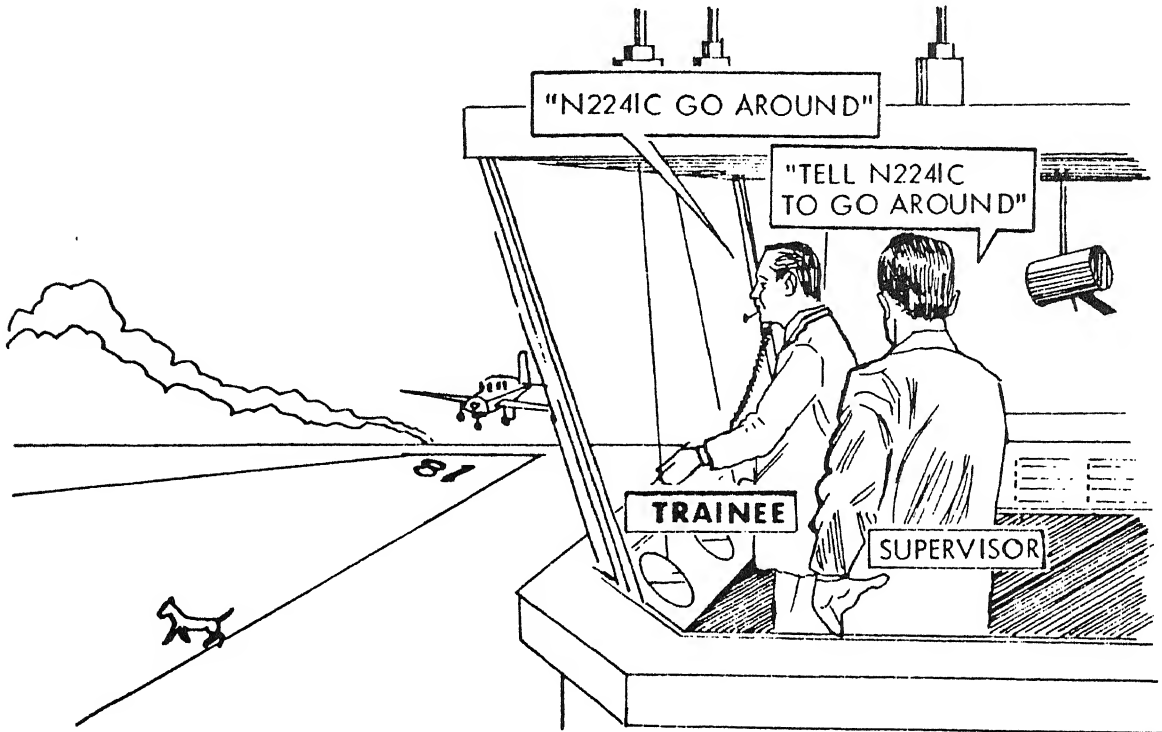

Refer to the illustration.

Is it optional, mandatory, or recommended that the specialist issue a go around?

.....

---

Mandatory

---

Should means a procedure is recommended.



Refer to the illustration.

Is the above instruction recommended, mandatory, or optional?

.....

---

Recommended

---

340

Which passage indicates a recommended procedure?

- ..... A. "... Inspect facility bulletin board, binder, and other optional data as specified by the facility chief."
- ..... B. "The facility chief may assign supplementary duties to any of the positions of operation."
- ..... C. "Regional offices should inform the NFDC if they desire to use a location identifier not presently recognized by the ADIS."

-----  
C.

341

May and need not means a procedure is optional.

Look at this statement:

"A single frequency may be used for more than one function when it is operationally advantageous, such as when operating positions are combined."

Which word indicates that the above procedure is optional?

.....

-----  
may

342

Look at this statement:


Some specialist need not be guided by the instructions.

This statement indicates a procedure which is:

- ..... A. Recommended
- ..... B. Mandatory
- ..... C. Optional

-----  
C.

Will, indicates futurity. It does not mean that application of a procedure is required.

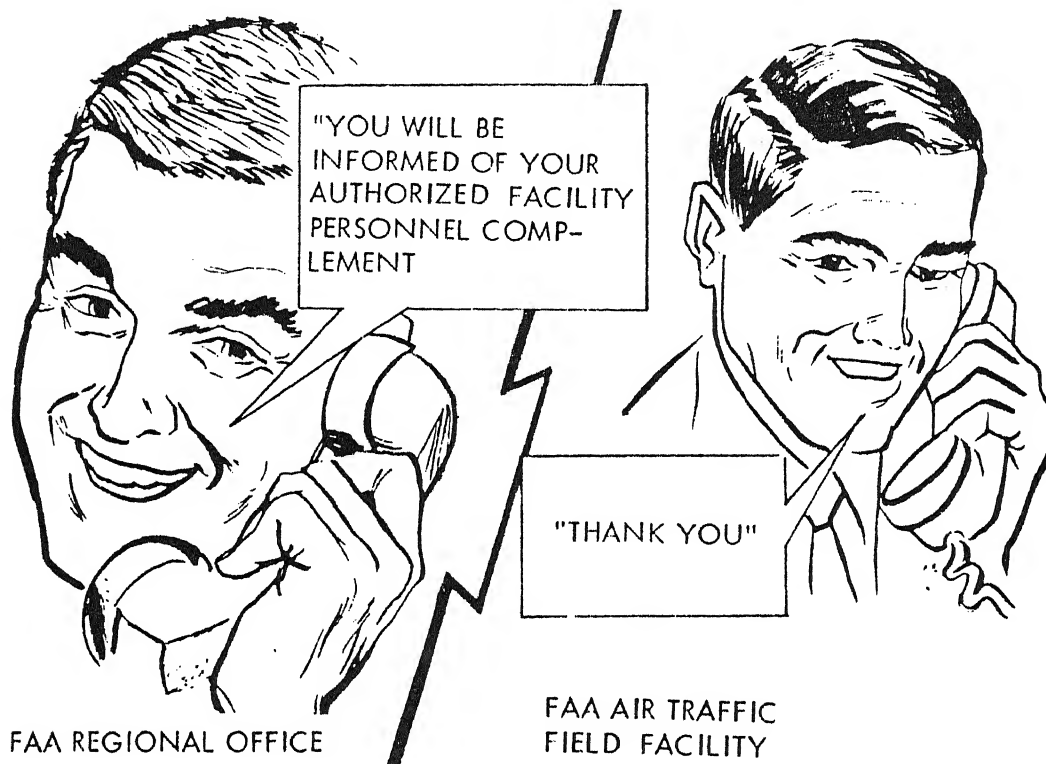

The supervisor in the field facility knows that the conversation with the area office reflects:

- ..... A. A mandatory procedure.
- ..... B. An optional procedure.
- ..... C. A procedure which indicates futurity.

---

C.

---

Indicate whether the following statements reflect a mandatory procedure (M), a recommended procedure (R), an optional procedure (O), or futurity (F).

- ..... A. "Provide air traffic control service to IFR and special VFR aircraft operating within controlled airspace and for which control responsibility has been received."
- ..... B. "You may use as a holding fix a location which the pilot can determine by visual reference to the surface if he is familiar with it."
- ..... C. "Each employee should be familiar with the duties of his particular position and with the duties of subordinate employees."
- ..... D. "The Washington Office will disseminate a summary of these improvement techniques to the regional offices for their information and optional adoption."

-----  
 M A.  
 .....

O B.  
 .....

R C.  
 .....

F D.  
 .....

Aircraft means the airframe, crew members, or both. It can be used in the singular or plural sense.

When it is necessary to make a hurried, brief transmission of traffic information, you may omit aircraft type.

As used in the above example, aircraft means:


- ..... A. The crew members.
- ..... B. The airframe.
- ..... C. The crew members and the airframe.
- ..... D. All of the above.

-----  
 D.

Approved separation means the minimum allowable separation between two or more aircraft when Air Traffic Control is being exercised.

Consider this statement:

Aircraft being separated vertically shall be separated by at least 1000 feet.

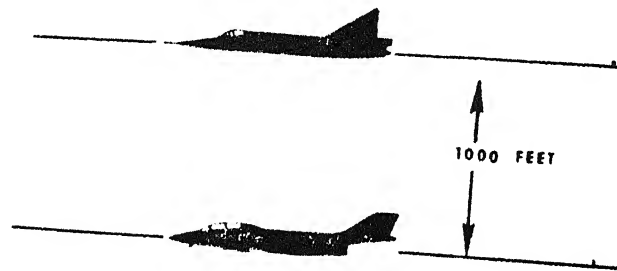

Now answer the following:


A controller has been told to use approved separation when separating those two aircraft.

He knows that:

- ..... A. He should separate the aircraft by at least 1000 feet.
- ..... B. He must separate the aircraft by at least 1000 feet.
- ..... C. He may use his judgment in determining how much separation to apply.

B.

Altitude refers to any given vertical distance.

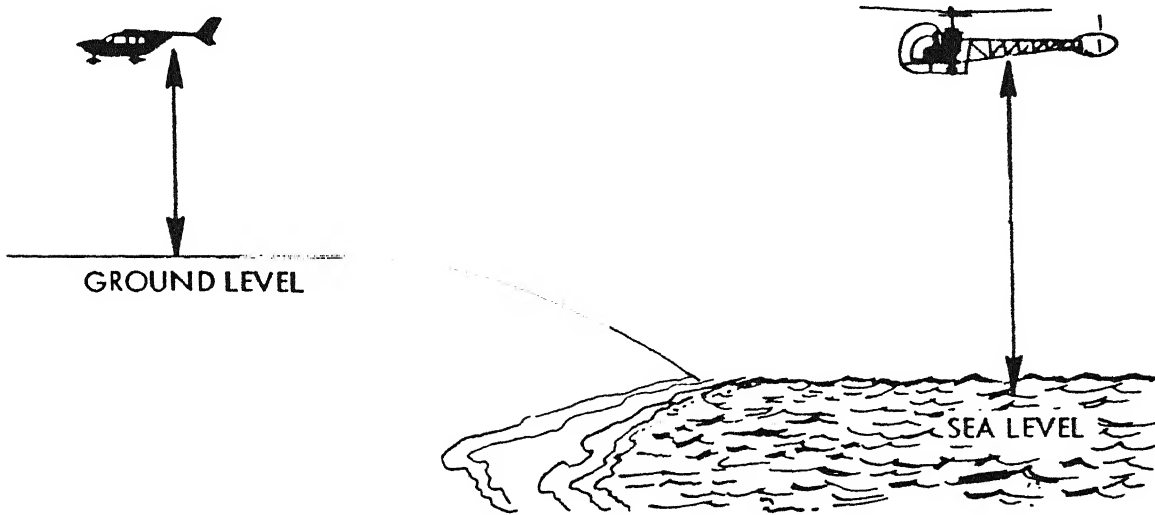

Which of the following illustrate the above statement:

- ..... A. An aircraft flying 500 feet above the terrain.
- ..... B. An aircraft flying 2000 feet above the clouds.
- ..... C. An aircraft at flight level 180.
- ..... D. An aircraft maintaining an altitude of 3000 feet above sea level.

---

A.

B.

C.

D.

---



Miles means nautical miles unless otherwise indicated.



Indicate which of the following refer to nautical miles:

- ..... A. "We have five miles separation between the two aircraft."
- ..... B. Visibility, as used in weather observations, is reported in statute miles.
- ..... C. "The normal station flight service area includes an area within 400 miles of the station."
- ..... D. "Avoid flight within five nautical miles if at this altitude."

-----

A.

C.

D.

Notes are statements of fact, of a prefatory or explanatory nature, which relate to the use of directive material. Notes are identified by the notation "(N)".

- ..... A. "...state the name of the military service, followed by the name of the military facility and the word tower. (E)"
  - ..... B. "...the preceding aircraft has departed and passed the intersection or is airborne and turning to avert any conflict. (I)"
  - ..... C. "The transferring controller shall forward this data to the receiving controller."
  - ..... D. "If your facility performs an en route control function, broadcast a SIGMET alert once on all frequencies serving the en route traffic. (N)"
-

Certain symbols indicate that text-related information appears in the right-hand column.

Examples are identified by the symbol "(E)".

Which statement indicates that an example appears in the right-hand column?

- ..... A. "...use the accompanying table to determine the lowest useable flight level to clear aircraft at or above 18,000 feet msl. (T)"
  - ..... B. "Where military and civil airports are located in the same general area and have similar names, state the name of the military service, followed by the name of the military facility and the word tower. (E)"
  - ..... C. "If the approaching aircraft is on a different frequency, inform it of the aircraft taxiing into position."
  - ..... D. "Each page will show the change number and effective date of the change."
- 

B.

Illustrations are identified by the symbol "(I)":

Which of the following indicates that an illustration appears in the right-hand column?

- ..... A. "...A preceding, arriving aircraft has taxied off the runway. (I)"
  - ..... B. "Include traffic information with the landing clearance."
  - ..... C. "Operate runway centerline and touchdown zone light in accordance with the accompanying intensity setting table, when any of the following conditions exist: (T)..."
  - ..... D. "Apply RVR landing minima, without regard to ceiling, if the approach and sequenced flashing lights are on and operating."
- 

A.

---

352

References to published material are identified by the symbol "(R)".

Which of the following indicates that a reference appears in the right-hand column?

- ..... A. "Clear an aircraft for a contact approach only when the pilot has requested it and the reported ground visibility is at least 1 statute mile."
  - ..... B. "In establishing aircraft in landing sequence you should not assign sequence numbers. (N)"
  - ..... C. "Identify the aircraft before taking action to position it in the landing sequence."
  - ..... D. "Broadcast a terminating advisory at the end of the advisory period. (R)"
- 

D.

---

353

Tables of related information are identified by the symbol "(T)".

Which of the following indicates that a table appears in the right-hand column?

- ..... A. "Issue to aircraft only factual information as reported by the airport management concerning the condition of the runway surface, describing the accumulation of precipitation. (E)"
  - ..... B. "Where RCR's are provided, transmit this information to all arriving USAF and ANG aircraft and to other aircraft when the pilot requests. (N)"
  - ..... C. "Operate runway centerline and touchdown zone lights in accordance with the accompanying intensity table, when any of the following conditions exist: (T)..."
  - ..... D. "858. AVOIDANCE OF AREAS OF NUCLEAR RADIATION (R)"
- 

C.

---

Occasionally two or more symbols appear after the text and indicate that more than one type of explanatory information appears in the right-hand column.

Identify the symbols that appear at the end of each example:

- A. "Clear aircraft at altitudes or flight levels according to the accompanying table: (T)(E)..."
- B. "Where adequate radar coverage exists, radar facilities may vector aircraft to the final approach course in accordance with 671. (N)(E)"
- C. "Use information from the accompanying table as a guide to determine the maximum interception angles when vectoring aircraft to intercept a final approach course. (R)(T)"
- D. "Military turbojet aircraft may be authorized to make SFO maneuvers if the following conditions are met: (N)(R)(I)..."

- 
- A. Table  
Example
  - B. Note  
Example
  - C. Reference  
Table
  - D. Note  
Reference  
Illustration
-

Handbook changes which involve substantial procedural, operational, or policy changes are identified by the symbol "→"

Which of the following examples indicate a substantial procedural, operational, or policy change?

- ..... A. "Use radio frequencies for the special purposes for which they are assigned."
  - ..... B. "→c. Transmit message immediately after call-up (without waiting for aircraft reply) when it is short and receipt is assured."
  - ..... C. "Emphasize appropriate digits, letters, or words to aid in distinguishing between similar aircraft identifications."
  - ..... D. "→a. Enter as may be required the following numbered items in the corresponding numbered spaces illustrated above:..."
- 

B.

D.

A star "\*" preceding a section, paragraph, or subparagraph, denotes one or more military modifications or exceptions to the basic FAA procedure.

Which of the following indicate one or more military modifications or exceptions to the basic FAA procedure?

- ..... A. "532. APPROACH INFORMATION BY NON-APPROACH CONTROL TOWERS"
  - ..... B. "\*533. APPROACH INFORMATION BY APPROACH CONTROL FACILITIES"
  - ..... C. "701. APPROACH INFORMATION"
  - ..... D. "\*702. LOST COMMUNICATIONS"
- 

B.

D.

The Facility Management Handbook applies to all three air traffic options. This handbook governs the operation and administration of the operating facilities of the Air Traffic Control System. It provides instructions, standards and guidance for facility supervisory personnel.

7210.3B

# FACILITY MANAGEMENT



OCTOBER 73

DEPARTMENT OF TRANSPORTATION  
FEDERAL AVIATION ADMINISTRATION  
Air Traffic Service

The following is a content page of the Facility Management Handbook.

## SCAN

7210.38

Page 1

### TABLE OF CONTENTS—PART I

#### Chapter 1. GENERAL

##### Section 1. APPLICATION

	<i>Page</i>
1. Introduction .....	9
2. Conflicting Instructions .....	9
3. Handbook Changes .....	9
4. Word Meanings .....	9
5. Notes .....	9
6. NAS Changes .....	9
7. Inter-Regional Requirements .....	9
8. Classification of Facilities .....	10
9. Emergency Plans .....	10
10-19. Reserved .....	10

##### Section 2. REFERENCES

20. Time Standards .....	11, 12
21. Time Checks .....	11, 12
22. Reference File .....	11, 12
23. Position Binders .....	11, 12
24-29. Reserved .....	11, 12
30. Checking Accuracy of Published Data .....	11, 12
31. Weather Observations .....	11, 12
32. Non-Aviation Weather Service .....	11, 12
33. National Weather Records Center .....	11, 12
34-49. Reserved .....	11, 12

#### Chapter 2. ADMINISTRATION OF FACILITIES

##### Section 1. RESPONSIBILITY

50. Job Requirements .....	13
51. Pre-Duty Familiarization .....	13
52. Sign Off/On Procedures .....	13
54-64. Reserved .....	13

##### Section 2. HOURS OF DUTY

65. Services Provided .....	14
66. Hours of Duty of Supervisors .....	14
67. Basic Watch Schedules .....	14
68. Consolidating Positions .....	14
69. Overtime Duty .....	14
70. Relief Periods .....	14
71-74. Reserved .....	14

##### Section 3. WATCH SUPERVISION

75. Supervisors .....	15
76. Controller-in-Charge .....	15

Below is an example of the Facility Management Handbook.

## Section 2. HOURS OF DUTY

### 65. SERVICES PROVIDED

Air Traffic Control shall be exercised during published hours of operation. However, other air traffic services may be provided outside of published hours of operation.

### 66. HOURS OF DUTY OF SUPERVISORS

a. Hours of duty performed by facility chiefs and their administrative staffs should ordinarily conform with the hours of duty in use by their regional offices.

b. Facility chiefs, deputy chiefs, facility officers, assistant chiefs, and data systems staffs shall either operate or observe a control position in their facility for a period of at least one hour each week. If currently qualified, may operate the position under general supervision; if not currently qualified, shall operate under direct supervision of a currently qualified controller.

### 67. BASIC WATCH SCHEDULES

a. Facility chiefs are responsible for preparing watch schedules for their facilities. These schedules shall take into account normal traffic flow, thereby permitting posting a continuing rotational schedule for an indefinite period of time.

b. Facility chiefs shall ensure that Center and Terminal ATCSs assigned to a position of operations:

(1) Do not work more than six consecutive days.

(2) Do not work more than a ten-hour day.

(3) Have an off-duty period of at least eight hours between watches.

### 68. CONSOLIDATING POSITIONS

Assign facility positions as required by activity, equipment, and duty assignment of

the individual facility. Positions may be consolidated in consonance with facility activity and the qualifications of the personnel involved.

### 69. OVERTIME DUTY

a. Distribution of overtime duty—Facility chiefs shall ensure that overtime duty is equitably distributed among all eligible employees who desire it. Retain overtime duty records for 12 months.

b. **Irregular overtime** is defined as overtime which cannot be anticipated and scheduled on a regular basis in advance. Employees working irregular overtime may be released when the workload requirement no longer exists.

c. **Scheduled overtime** is defined as overtime occurring on a regular recurring basis for which employees are scheduled in advance. Scheduled overtime should be used only when there is a known requirement for accomplishing required work and the necessary manpower is not otherwise available. When an employee is working scheduled overtime he will be expected to work the full time for which he is scheduled. If the situation should arise that the services of an employee working scheduled overtime are no longer required and the employee requests early release, he may be released.

### 70. RELIEF PERIODS

Facility chiefs shall use all available qualified personnel to provide relief periods. First priority should be given to providing a reasonable amount of time away from the position of operations for meals. Additionally, time for such things as briefings and training should be made to rotate work assignments among qualified employees.

### 71-74. RESERVED



---

360

What information concerning a facility would you find in Chapter 2?  
Refer to frame 336.

.....

---

Administration of Facilities

---

361

What information regarding your job is contained in paragraph 52?  
Refer to frame 336.

.....

.....

---

Sign Off/On Procedures

---

362

Which of the following can be found in the Facility Management  
Handbook? Refer to frame 337.

..... A. Overtime duty

..... B. Separation of aircraft

..... C. Basic watch schedules

..... D. Relief periods

---

A.

C.

D.

---

The Location Identifiers Handbook lists the worldwide and location identifiers authorized by the Federal Aviation Administration and Canadian Department of Transport. These identifiers are required in air traffic and related activities. See examples.

## LOCATION IDENTIFIERS



JANUARY 15 1975

**DEPARTMENT OF TRANSPORTATION  
FEDERAL AVIATION ADMINISTRATION**

**Air Traffic Service**

The following is a page from the Location Identifiers Handbook. Here, city names are translated into identifiers. Scan:

Location identifiers usually do not exceed three letters, or letter number combinations, and are used to save time in writing, printing, and in allocating space. There are two ways to locate an identifier for an airport or VOR: (1) know the name of the facility and look for the three-letter code, or (2) know the three-letter code and look up the name of the facility. The following are pages from the Location Identifiers Handbook.

## SCAN

Jan 15 1975

7359 AC

Location	Ident	In	Out	Location	Ident	In	Out	Location	Ident	In	Out
Alice, Tex., Alice FSS	ALI			Alma, Mich., Alma Radiobeacon	AMH			Ambley, Pa., Ambley Radiobeacon	ING		
Alice, Tex., Alice VOR	ALI			Alma City, Minn., Int. (RST284/MSPI87)	IZC			Amboy, N.J., Int. (355COL/04WARD)	TAY		
Aliceville, Al., George Dwyer Field	ALV	BHM	ME	Almyra, Ar., Almyra Municipal Airport	MTJ	LIT	ME	Anchika, Alaska, Anchika Airport	ANT	COB	AN
Aliceville, Ala., Aliceville Radiobeacon	AIV	TCL		Alpena, Mich., Phelps Collins Airport	APN	PLN	MP	Anchika Island, Ak., Navy Automatic Weather Station	NIA		
Alii, Hawaii Int. (KOA 327-33) (JPP 751)	6AI			Alpena, Mich., Collins Radiobeacon	CNS			Amelia, La., Amelia Airport	4R6		HU
Allakappa, Pa., Allakappa-Hopewell Airport	6GJ	AGC	OB	Alpena, Mich., Thunder Bay Island C.G.L.S./WOS	4BY			Amelia, La., Lake Palourde Base Helipad	7R1	NEW	HI
Alkali, Idaho Int. (BFI 111-51) (MUO 866)	4AX			Alpena, Mich., Alpena VORTAC	APN			Amelia, Va. Int. (RIC 245-26 FAX 177)	7AM		
Allakaket, Ak., Allakaket Airport	AET	BYT	AI	Alpena, Mich., Int. (CRL108-52/FNT231)	9FH			Amelia, Va. Hilltop Airport	W08	RIC	DC
8545-2145 LCL	AET	FAI	AI	Alpena, Ark. Int. (HOT 218-PCO111)	2AN			8608-2208 LCL Time	W08	BKT	
2145-8545 LCL	AET	FAI	AI	Alpine Radiobeacon, see Gaylord, Mi.	ALP			2208-8608 LCL Time	W08	RIC	DC
Allard, La. (Gulf of Mexico) Int. (21-44 089-49)	8AJ			Alpine, N.Y., Alpine Radiobeacon	ALP			American Falls, Id., American Falls Airport	U01	BYI	LC
Allan, Mich., Padgham Field	350	MBS	AU	Alpine, Tex., Alpine Municipal Airport	E38	ELP	AB	Americus, Ga. Int. (ABY 351-26 VNA 759)	2AU		
Allegheny Radiobeacon, see Pittsburgh, Pa.				Allamore, Ca. Int. (QAK 868-27) SAC 177-39/SCX 298-27)	4AT			Americus, Ga. Southern Field	ACJ	ABY	TL
Allegheny VORTAC, see Pittsburgh, Pa.				Allavista, Va. Allavista International Airport	1W1	RDA	DC	Americus, Ga. Southern Radiobeacon	ACJ		
Allen, Fla. DNE Fix (NQX 245-22)	9FL			Alto, La. Int. (MLU 897-21/HEZ 329)	8AO			Ames, Iowa, Municipal Airport	AMW	DSW	MP
Allen, Wisc. ATC Coord. Fix (MSP 183-86)	8FL			Alton, Ill., Civic Memorial Airport	ALN	STL	KC	Ames, Iowa, Ames Radiobeacon	AMW		ID
Allen AAF, see Delta Junction 8608-2208 LCL	8IG	BTG	AI	Alton, Ill., Civic Memorial Radiobeacon	CVM			Amherstable Landing Strip	198	CRW	
2208-8608 LCL	8IG	FAI	AI	Altoona, Pa., Blair County Airport	A00		OB	Amvet, Wn. Int. (RWF 248-29.4) (MML 158)	308		
Allen County VOR, see Lima Ohio				Altoona, Pa., Altoona FSS	A00			Amsh, Pa. Int. (HAR 184) (SAX 242)	7AH		
Allen, Tex. Int. (BUJ222-15/SCV334)	8JL			Altoona, Pa., Altoona VOR	A00			Amityville, N.Y., Zahns Airport	AYZ	ISP	NY
Allendale, Mich. Int. (MKE 896-101) (PMB 818-20)	3ZD			Altoona, Pa., Peterson Memorial Field	9CR	PSB	OB	Amsterdam Radiobeacon, see Eorwman, Mont.			
Allendale, S.C., Allendale County Airport	8BJ	SAV	JK	Alturas, Calif., Municipal Airport	088	LMT	SE	Anacapa, Calif. Int. (OAF 249 SBA 133-24)	4AN		
Allendale, S.C., Allendale VOR	ALD			Altus, Ok., Altus AFB	LTS	HBR	FW	Anacortes, Wash., Anacortes Airport	745	BLI	SE
Allenhurst Radiobeacon, see Hinesville, Ga.				Altus, Ok., Altus VOR	LTS			Anapolis, Md., Patos Island C.G.L.S./WOS	945		
Allentown, Pa., Allentown-Bethlehem-Easton Airport	ABE	AVP	NY	Altus, Ok., Altus Municipal Airport	AXS	HBR	FW	Anacostia, D.C., Navy Radiobeacon	NDV		
Allentown, Pa., Allentown Queen City Municipal Airport	1M9	AVP	NY	Alva, Miss. Int. (CBM 264-55)	2VA			Anadarko, Okla., Municipal Airport	F88	OKC	FW
Allentown, Pa., Allentown VORTAC	ABE			Alva, Okla., Alva Radiobeacon	AVK			Anaheim, Calif., Anaheim Disneyland Helipad	ANA	LAX	LA
Allenville, Mo. Int. (FAM138-35) (CG275)	9AN			Alva, Okla., Municipal Airport	3K1	GAG	KC	Anahac, Tex., Chambers County Airport	T88	HOU	HU
Alliance, Mo., Alliance Airport	AIA	BFF	DV	Alvin, Tx. Alvin Airport	6PS	GLS	HU	Anaktuvuk Pass, Ak., Anaktuvuk Pass Airport	AKP		
Alliance, Mo., Alliance VOR	AIA			Alvin Callender NAS, see New Orleans, La.	NRG	NEH	HU	8545-2145 LCL	AKP	BTI	AN
Alliance, Mo., Alliance Radiobeacon	A0Q			Alyeska, Alaska, Alyeska Airport	AQY	ANC	AN	2145-8545 LCL	AKP	FAI	AN
Alliance, Ohio, Alliance Airport	6GR	CLE	OB	Amado, Ariz. DNE Fix (DMA TACAN 198-18)	8AM			Anasco, P.R. Int. (RSJ 282-16 DDP 261 trg/ PSE 300)	9KN		
Alliance, Ohio, Miller Airport	4G3	CLE	OB	Amara, Iowa, Marsh Airport	C11	CIO	AU	Anchor, Hawaii Int. (KOA 297-15 MUJ 248)	6AN		
Allison, Ia. Municipal Airport	K98	CID	AU	Amarillo, Tex., Amarillo Air Terminal	AMA		AB	Anchorage, Alaska, APTCC	ZAN		
Allison, S.D. Int. (ABR 222-43) (HON 182)	3LI			Amarillo, Tex., Amarillo FSS	AMA			Anchorage, Alaska, Anchorage FSS	ANC		AN
Alma, Ga., Alma-Baron Airport	AMG	AMG	JK	Amarillo, Tex., Amarillo Radiobeacon Runway 3	AMA			International Airport	ANC		
8608-2208 LCL	AMG	SSI	JK	Amarillo, Tex., Amarillo VORTAC	AMA			Anchorage Alaska, Anchorage VORTAC	AIC		
Alma, Ga., Alma FSS	AMG			Amarillo, Tex., Tradewind Airport	TOW	AMA	AB	Anchorage Alaska, Campbell Air Strip	CSR	ANC	AN
Alma, Ga., Alma VORTAC/WP	AMG			Amarillo Radiobeacon, see St. Joseph, Mo.	AZH						
Alma, Kans. Int. (TOP 254-48) (MHK 138/EMP 328)	3AK			Amber, Ok. Int. (OKC 193-13) (TIK 248)	8AB						
Alma, Mich., Gratiot Community Airport	AMH	MBS	OB	Ambley, Alaska, Ambley River Airport	ABL	OTZ	AN				

Page A-3

On the sample page, identifiers are translated into the corresponding city name.

# SCAN

Jan 15 1975

7339.4C

LVS Las Vegas, N. Mex., Las Vegas Airport	MAL Malone, N.Y., Dulort Airport	MDA San Antonio, Tex., Martindale AAF
LVS Las Vegas, N. Mex., Las Vegas FSS	MAO Marion, S.C., Marion Radiobeacon	MDC Boston, Mass., Logan Int'l Airport, Malden Radiobeacon BC
LVS Las Vegas, N. Mex., Las Vegas VORTAC	MAP Maples, Mo., Maples VORTAC	Runway 33L
LVT Livingston, Tenn., Livingston VORTAC	MAW Malden, Mo., Malden Airport	MDD Midland, Tex., Midland Airport
LWB Lewisburg, W. Va., Greenbrier Valley Airport	MAW Malden, Mo., Malden VORTAC	MDE Cincinnati, Ohio, Madeira Radiobeacon
LWB Lewisburg, W. Va., Lewisburg Radiobeacon	MAZ Mayaguez, Puerto Rico, Mayaguez Airfield	MDE Madeira, Ohio, Madeira Radiobeacon
LWC Lawrence, Kans., Lawrence Radiobeacon	MAZ Mayaguez, P. R., Mayaguez Radiobeacon	MDG Valdosta, Ga., Moody AFB ILS
LWL Wells, Nev., Harriet Field	MAZ Mayaguez, P. R., Mayaguez VOR	Runway 36R
LWL Wells, Nev., Wells VOR	MBG Mobridge, S. Dak., Mobridge Airport	MDH Carbondale-Murphysboro, Ill., Southern Illinois Airport
LWM Lawrence, Mass., Lawrence Airport	MBG Mobridge, S. Dak., Mobridge VOR	MDH Carbondale, Ill., Carbondale Radiobeacon
LWM Lawrence, Mass., Lawrence VOR	MBL Manistee, Mich., Manistee - Blacker Airport	MDN Madison, Ind., Jefferson Proving Ground
LWS Lewiston, Idaho, Lewiston-Nez Perce County Airport	MBS Saginaw, Mich., Saginaw FSS	MDO Middleton Island, Alaska Intermediate Field
LWS Lewiston, Idaho, Lewiston VOR	MBS Saginaw, Mich., Saginaw VORTAC	MDO Middleton Island, Alaska, Middleton Island VORTAC
LWT Lewistown, Mont., Lewistown Airport	MBS Saginaw, Mich., Tri City Airport	MDR Medfra, Alaska, Medfra Airport
LWT Lewistown, Mont., Lewistown FSS	MBT Murfreesboro, Tenn., Lascassas Radiobeacon	MDS Madison, S.D., Wentworth Radiobeacon
LWT Lewistown, Mont., Lewistown VORTAC	MBW Medicine Bow, Wyo., Medicine Bow VORTAC	MDT Middletown, Pa., Harrisburg International Airport - Olmsted Field
LWV Lawrenceville, Ill., Lawrenceville-Vincennes Municipal Airport	MCR McComb, Miss., McComb-Pike County Airport	MDV Baltimore, Md., Martin Marietta Airport Middle River VOR
LWV Lawrenceville, Ill., Lawrenceville VOR	MCR McComb, Miss., McComb FSS	MDW Chicago, Ill., Chicago-Midway Airport
LXB Pittsburgh, Pa., Greater Pittsburgh Airport ILS Runway 30L	MCC Sacramento, Ca., McClellan AFB Western A.F. Rescue Center	MDZ Medford, W. Medford Radiobeacon
LXL Little Falls, Minn., Little Falls Municipal Airport	MCC Sacramento, Calif., McClellan Radiobeacon	MEA Cassoway, W. Va., Meadows Radiobeacon
LXL Little Falls, Minn., Little Falls Radiobeacon	MCC Sacramento, Calif., McClellan TACAN	NED Chicago, Ill., O'Hare ILS Runway 89R
LXN Lexington, Nebr., Lexington Airport	MCE Merced, Calif., Merced VOR	MEE Muskogee, Okla., Davis VOR
LXN Lexington, Nebr., Lexington Radiobeacon	MCE Merced, Calif., Merced Airport	MEH Meacham, Oreg., REP
LXV Leadville, Colo., REP	MCF Tampa, Fla., MacDill AFB	MFI Meridian, Miss., Key Field
LYH Lynchburg, Va., Preston Glenn Airport	MCF Tampa, Fla., MacDill AFB TACAN	MFI Meridian, Miss., Meridian FSS
LYH Lynchburg, Va., Lynchburg VORTAC	MCG McGrath, Alaska, McGrath Airport	MEI Meridian, Miss., Meridian VORTAC WP
LYO Lyons, Kans., Lyons-Rice County Municipal Airport	MCG McGrath, Alaska, McGrath FSS	MEM Memphis, Tenn., Brooks Radiobeacon
LYO Lyons, Kans., Lyons Radiobeacon	MCG McGrath, Alaska, McGrath VORTAC	MEM Memphis, Tenn., Memphis International Airport
LYS Olean, N.Y., Olean Radiobeacon	MCI Kansas City, Mo., Kansas City International Airport	MEM Memphis, Tenn., Memphis FSS
	MCK McCook, Nebr., McCook Airport	MEM Memphis, Tenn., Memphis VORTAC WP
	MCK McCook, Nebr., McCook VOR	MEQ Jefferson City, Mo., Memorial Radiobeacon
	MCN Macon, Mo., Macon VORTAC	MEQ Memorial Radiobeacon, see Jefferson City, Mo.
	MCN Macon, Ga., Macon FSS	MER Merced, Calif., Castle AFB
	MGN Macon, Ga., Macon VORTAC	MER Merced, Calif., Castle TACAN
	MCO Orlando, Fla., McCoy AFB	MEV Minden, Nev., Douglas County Airport
	MCO Orlando, Fla., McCoy TACAN	MEY Mapleton, Ia., Mapleton Municipal Airport
	MCU Rochester, N. Y., ILS Runway 4	MEY Mapleton, Ia., Mapleton Radiobeacon
	MCW Mason City, Iowa, Mason City Airport	MEZ Menz, Ar., Menz Radiobeacon
	MCW Mason City, Iowa, Mason City FSS	MFA Miami, Fla., Int'l Airport, ILS Runway 09L
	MCW Mason City, Iowa, Mason City VORTAC	MFD Mansfield, Ohio, Mansfield LaMh Municipal Airport
	MCX Monticello, Ind., White County Radiobeacon	MFD Mansfield, Ohio, Mansfield CS/T
	MCX Monticello, Ind., White County Radiobeacon	
	MCY Mercury, Nev., Mercury Radiobeacon	
	MCZ Williamson, N. C., Williamson Radiobeacon	

Page 8-23

---

366

What are the identifiers for the following? Refer to frame 342.

..... Alyeska, Alaska

..... Almyra, Ark.

---

..... AQY

..... M73

---

367

Identify the following. Refer to frame 343.

..... MAE

..... MCI

..... MDD

---

Madera, Calif.

Kansas City, Mo.

Midland, Tex.

---

368

Which handbook would you use to look up the three-letter code for Dallas, Texas?

.....

---

Location Identifiers Handbook

---

The Contractions Handbook contains the approved word and phrase contractions used by FAA personnel. See example below.

7340.IE

# CONTRACTIONS



October 1, 1975

**DEPARTMENT OF TRANSPORTATION**  
**FEDERAL AVIATION ADMINISTRATION**  
**AIR TRAFFIC SERVICE**

This handbook is also used by other organizations which provide air traffic control, communications, weather, charting, and associated services.

During your career with the FAA, you will be concerned with the contractions contained in this handbook. See the table of contents below.

## SCAN

7344.18  
10/1/78

### TABLE OF CONTENTS

	<i>Page</i>
Introduction .....	1-5
All Contractions, Decode .....	A1-A28
Administrative and General Operational Contractions, Encode .....	B1-B14
Air Traffic Control Contractions, Encode .....	C1-C8
Meteorological Contractions, Encode .....	D1-D6
International Abbreviations, Encode .....	E1-E6
Civil Aircraft Company Designators, Encode .....	F1-F14
Civil Aircraft Company Designators, Decode .....	G1-G16
Special Use Symbols, Decode .....	H1
Special Use Symbols, Encode .....	I1
Aircraft Nationality and Registration Marks, Decode .....	J1-J2
Aircraft Nationality and Registration Marks, Encode .....	K1-K2
Civil/Military Aircraft Type Designators, Decode .....	L1-L6
Civil/Military Aircraft Type Designators, Encode .....	M1-M6

The following is a page from the Contractions Handbook.

## SCAN

7340.1B

10/1/78

Page C-1

## Air Traffic Control Contractions

### Encode

#### A

absem .....	ABM	aircraft out of commission for parts.....	AOCF
aboard .....	ABD	Air Defense Control Facility.....	ADCF
above clouds.....	ACLD	Air Defense Direction Center.....	ADDC
above ground level.....	AGL	Air Defense Identification Zone.....	ADIZ
above sea level.....	ASL	Air Defense Liaison Officer (at NORAD Headquarters).....	ADLO
accelerate .....	ACLT	Air Defense Warning.....	ADW
accept .....	ACPT	airfile .....	A/F
accident .....	ACONT	air evacuation.....	AEVAC
accident notice.....	ACNOT	air evacuation aircraft (military aircraft identification prefix).....	E
account .....	ACCT	Air Force.....	AF
account mechanical.....	AMECH	Air Force Base.....	AFB
account traffic.....	ATFC	Air Force Jet.....	AFJ
account weather.....	AWX	air height surveillance radar.....	AHSR-1
acknowledge .....	ACK	air ground.....	AG
acknowledgement of receipt (message handling).....	R	Airport Advisory Service.....	AAS
aerobatic .....	ACRBT	airport of entry.....	AOE
acting .....	ACTG	Airport Reservation Office.....	ARO
activate .....	ACTVT	airport surface detection equipment.....	ASDE
activate IFR flight plan.....	AIFP	airport surveillance radar.....	ASR
activate VFR flight plan.....	AVFP	airport traffic control tower.....	ATCT
active .....	ACTV	Airman's Information Manual.....	AIM
actual time of arrival.....	ATA	Airman's Meteorological Information.....	AIRMET
actual time of departure.....	ATD	Airman Advisory (a Notice to Airmen for local dissemination only).....	AIRAD
actual time of penetration.....	ATP	air refueling.....	AIRFL
actual time of release.....	ATRLS	air refueling control point.....	ARCP
additional traffic is.....	ADNL TFC	air refueling egress point.....	AREP
adjacent .....	ADJT	air refueling initial point.....	ARIP
Automated Radar Terminal System.....	ARTS	Air Rescue Service (USAF).....	ARS
advise .....	ADZ	air route surveillance radar.....	ARSR
advise arrival.....	ADZAR	air route traffic control.....	ARTC
advise Customs.....	ADCUS	Air Route Traffic Control Center.....	ARTCC
advise if able.....	AIA	air route traffic control center clearance delivered (towers only) (ctl only).....	B
advise if able to proceed.....	AAP	airspace .....	ASP
advise intentions.....	ADZI	Air Traffic Division.....	ATD
advise present position and altitude.....	APPA	ATC advises.....	CA
after passing.....	APSG	air traffic control beacon interrogator.....	ATCBI
ahead .....	AHD	ATC clears (ctl only).....	C
Air or Army National Guard (military aircraft identification prefix) .....	C	ATC requests.....	CR
Airborne Early Warning.....	AEW	airway .....	AWY
airborne launching.....	ABLCHO	alert notice.....	ALNOT
air base .....	AB	alfa (phonetic).....	A
airborne .....	AB	All Accident Notice Offices.....	ALANO
airborne pulse search radar.....	APS	all International Telecommunications Switching Centers.....	ALIATSC
air carrier.....	ACR	all courses and quadrants.....	ACQ
air combat maneuvers.....	ACM	all weather landing.....	AWL
air combat training.....	ACT	all weather low altitude route.....	AWLAR
air conditioning.....	A/C	all concerned notified.....	ACN
aircraft .....	ACFT	allowable take-off gross.....	ATOG
Air Carrier District Office.....	ACDO	all right.....	OK
aircraft departing at (number of minutes) intervals.....	ADMIS	alternate (approach and landing charts only).....	A
Aerospace Defense Command.....	ADC		



## Page A-2

**ABMAP**.....advise by air mail as soon as practicable  
**ADMIN**.....administration  
**ADMIN**.....Administrator  
**ADMIS**.....aircraft departing at [number of minutes] intervals  
**ADMIV**.....administrative  
**ADML**.....Admiral  
**ADML TPC**.....additional traffic is (cfl. only)  
**ADNOK**.....advise if not correct  
**ADNOT**.....ADIS Notice  
**ADO**.....Airport District Office  
**ADP**.....Automatic Data Processing  
**ADPE**.....Automatic Data Processing Equipment  
**ADPP**.....Automatic Data Processing Programs  
**ADPS**.....Automatic Data Processing Systems  
**ADQT**.....adequate  
**ADR**.....advisory route (ICAO abbr.)  
**ADRE**.....advise reason for delay  
**ADRNDCK**.....Adirondack  
**ADS**.....address  
**ADSPN**.....advise disposition  
**ADTAC**.....Automatic Digital Tracking Analyzer Computer  
**ADVALT**.....advice of allotment or allotment advice  
**ADVC**.....advice  
**ADVCTN**.....advection  
**ADVN**.....advance  
**ADW**.....Air Defense Warning  
**ADZ**.....advise  
**ADZAR**.....advise arrival  
**ADZI**.....advise intentions  
**ADZOF**.....advise this office  
**ADZY**.....advisory  
**AED**.....Associate Administrator for Engineering and Development (FAA)  
**AEO**.....Aviation Evaluation Group  
**AEM**.....aircraft and engine mechanic  
**AEM**.....aircraft and engine mechanic  
**AENO**.....Airways Engineer  
**AEO**.....Office of Environmental Quality (FAA)  
**AER**.....approach end runway  
**AERO**.....aviation routine weather report (in international MET figure code (ICAO abbr.)  
**AERO**.....aeronautical; aeronautics  
**AEVAC**.....air evacuation  
**AEW**.....airborne early warning  
**AF**.....Air Force  
**AF**.....aviation facilities  
**A/F**.....airfile  
**AFB**.....Air Force Base  
**AFC**.....automatic frequency control (Airway Facilities)  
**AFCOM**.....AFTN Communications Center, FAA (Kansas City, Mo.)  
**AFCS**.....Air Force Communications Service  
**AFCT**.....affect  
**AFDK**.....after dark  
**AFIL**.....filed flight plan in the air (ICAO abbr.)  
**AFIO**.....Authorization for Fighter Interceptor Operations  
**AFIRM**.....affirmative  
**AFJ**.....Air Force jet  
**AFNEA**.....Air Force NOTAM Exchange Area  
**AFNEO**.....Air Force NOTAM Exchange Office  
**AFP**.....alternate flight plan  
**AFRT**.....air freight  
**AFS**.....Flight Standards Service (FAA)  
**AFS**.....airways facilities sector  
**AFS**.....aeronautical fixed service (ICAO abbr.)  
**AFT**.....after  
**AFTN**.....afternoon  
**AFTN**.....Aeronautical Fixed Telecommunications Network  
**AG; A/G**.....air-ground  
**AGA**.....Office of General Aviation (FAA)  
**AGA**.....aerodromes, air routes and ground aids (ICAO abbr.)  
**AGACS**.....automatic ground air/ground communication system  
**AGC**.....Office of Chief Counsel (FAA)  
**AGC**.....automatic gain control (Airway Facilities)  
**AGCA**.....automatic ground controlled approach  
**A-GEAR**.....arresting gear

7340.1E

10/1/75

**AOL**.....above ground level  
**AGN**.....again  
**AGR**.....agree  
**AGRMNT**.....agreement  
**AGT**.....agent  
**AHD**.....ahead  
**AHSE-I**.....air height surveillance radar  
**AI**.....arrival approval request for IFR flight  
**AIA**.....Office of International Aviation Affairs (FAA)  
**AIA**.....advise if able  
**AID**.....Airport Information Desk  
**AIFP**.....activate IFR flight plan  
**AILS**.....Automatic Instrument Landing System  
**AIM**.....Airmen's Information Manual  
**AIP**.....Aeronautical Information Publication (ICAO abbr.)  
**AIRAD**.....Airmen's Advisory (a Notice to Airmen for local dissemination only)  
**AIRCOMNET**.....Air Force Communications Network  
**AIREP**.....plain language form of air-report (ICAO abbr.)  
**AIRFL**.....air refueling  
**AIRMET**.....Airman's Meteorological Information  
**AIROPNET**.....Air Operations Network  
**AIS**.....Office of Information Service (FAA)  
**AIS**.....Aeronautical Information Service(s)  
**AK**.....Alaska  
**AL**.....all (when used as prefix)  
**AL**.....annual leave  
**AL/**.....at least (altitude)  
**AL**.....Alaskan Region, FAA  
**AL**.....Alabama  
**ALACFO**.....All Air Carrier Field Offices  
**ALADLO**.....all Air Defense Liaison Officers in region  
**ALAFFO**.....All Airway Facilities Sector and Field Offices  
**ALANO**.....All Accident Notice Offices  
**ALARTC**.....all air route traffic control centers in region  
**ALAT**.....all Air Traffic Service personnel in region  
**ALATF**.....All Air Traffic Field Facilities  
**ALATFO**.....All Air Traffic Field Offices  
**ALCT**.....attempt to locate  
**ALCKT**.....all stations or offices having send-receive teletype-writer service on circuit  
**ALCS/C**.....all AT combined station/centers in region  
**ALCS/T**.....all AT combined station/towers in region  
**ALDA**.....Air Line Dispatchers Association  
**ALERFA**.....message relates to alert phase (ICAO abbr.)  
**ALP**.....aloft  
**ALFAA**.....all FAA Field Offices & personnel  
**ALFAB**.....All FAA Offices on Service B  
**ALFOF**.....all FAA field offices  
**ALFSFO**.....All Flight Standards Field Offices  
**ALPSS**.....all flight service stations in region  
**ALG**.....Logistics Service (FAA)  
**ALG**.....along  
**ALGHNY**.....Allagheny  
**ALGTG**.....alighting  
**ALIATSC**.....All International Aeronautical Telecommunications Switching Centers  
**ALIPSS**.....all international flight service stations in region  
**ALNMT**.....alignment  
**ALNOT**.....alert notice  
**ALP**.....airport layout plan  
**ALP**.....airport location point  
**ALPA**.....Air Line Pilots Association  
**ALQDS**.....all quadrants  
**ALR**.....Office of Labor Relations (FAA)  
**ALRAFAC**.....all radar air traffic control facilities in region  
**ALRGN**.....all Regional Offices  
**ALS**.....approach lighting system  
**ALSEC**.....all sectors  
**ALSF-1**.....standard 3000 foot high intensity ALS with sequenced flashers category I configuration  
**ALSF-2**.....standard 3000 foot high intensity ALS with sequenced flashers category II configuration

---

373

Encode the following words: (1) above sea level, (2) air evacuation, and (3) aircraft. Refer to frame 349.

.....  
.....  
.....

---

ASL

AEVAC

ACFT

---

374

Decode the following: (1) AGL, (2) A/F, and (3) AIRFL. Refer to frame 350.

.....  
.....  
.....

---

Above ground level

Airfile

Air refueling

---

The Airman's Information Manual (AIM) is an FAA publication which contains information about the status of components of the National Airspace System and serves as a preflight and inflight reference for pilots. It has been designed as a pilot's operational manual for use primarily within the United States. See example below.



The AIM is divided into four basic parts: (1) Basic Flight and ATC Procedures, (2) Airport Directory, (3) Operational Data and Notices to Airmen, and (4) Graphic Notices and Supplemental Data.

Part 1 contains basic fundamentals required for flying in the National Airspace System and facts of interest to pilots, and ATC information affecting rules, regulations, and procedures. Below is a page from Part 1. Scan this page.

## TABLE OF CONTENTS

	Page
● GLOSSARY OF AERONAUTICAL TERMS .....	1-1
Chapter 1. NAVIGATION AIDS	
AIR NAVIGATION RADIO AIDS .....	1-7
General .....	1-7
Non-Directional Radio Beacon (NDB) .....	1-7
VHF Omnidirectional Range (VOR) .....	1-7
VOR Receiver Check .....	1-8
Tactical Air Navigation (TACAN) .....	1-8
VHF Omnidirectional Range/Tactical Air Navigation (VORTAC) .....	1-8
Distance Measuring Equipment (DME) .....	1-9
Class of NAVAIDS .....	1-9
Marker Beacon .....	1-10
● Instrument Landing System (ILS) .....	1-10
Simplified Directional Facility (SDF) .....	1-13
Maintenance of FAA NAVAIDS .....	1-13
NAVAIDS with Voice .....	1-13
Simultaneous Voice Transmissions from a Single FSS Location .....	1-13
User Reports on NAVAID Performance .....	1-13
Loran .....	1-14
CONSOLAN .....	1-14
VHF/UHF Direction Finder .....	1-14
● Radar .....	1-14
Air Traffic Control Beacon System (ATCRBS) .....	1-15
Surveillance Radar .....	1-16
Precision Radar .....	1-16
AIRPORT, AIR NAVIGATION LIGHTING AND MARKING AIDS .....	1-17
Aeronautical (Light) Beacons .....	1-17
Rotating Beacon .....	1-17
Auxiliary Lights .....	1-17
● Obstructions .....	1-17
Military Airports .....	1-17
Daylight Beacon Operation .....	1-18
Airway Beacons .....	1-18
Instrument Approach Light Systems .....	1-18
● Runway Edge Light Systems .....	1-18
In-Runway Lighting .....	1-18
● Control of Lighting Systems .....	1-18
● Pilot Control of Airport Lighting .....	1-18
Visual Approach Slope Indicator (VASI) .....	1-19
Tri-Color Visual Approach Slope Indicator .....	1-19
Runway End Identifier Lights (REIL) .....	1-20
Aircraft Arresting Devices .....	1-20
Marking .....	1-20
Chapter 2. AIRSPACE	
UNCONTROLLED AIRSPACE .....	1-22
General .....	1-22
VFR Requirements .....	1-22
Minimum Visibility and Distance from Clouds—VFR in Uncontrolled Airspace .....	1-22

## Chapter 1. NAVIGATION AIDS

### AIR NAVIGATION RADIO AIDS

#### GENERAL

Various types of air navigation aids are in use today, each serving a special purpose in our system of air navigation.

These aids have varied owners and operators namely: the Federal Aviation Administration, the military services, private organizations; and individual states and foreign governments.

The Federal Aviation Administration has the statutory authority to establish, operate, and maintain air navigation facilities and to prescribe standards for the operation of any of these aids which are used by both civil and military aircraft for instrument flight in federally controlled airspace. These aids are tabulated in the Airport/Facility Directory by State in Part 3 of this Manual.

A brief description of these aids follows. Also, a composite table of normal usable altitudes and distances appears in Class of VOR/VORTAC/TACAN.

#### NON-DIRECTIONAL RADIO BEACON (NDB)

1. A low or medium-frequency radio beacon transmits nondirectional signals whereby the pilot of an aircraft equipped with a loop antenna can determine his bearing and "home" on the station. These facilities normally operate in the frequency band of 200 to 415 kHz and transmit a continuous carrier with 1,020-cycle modulation keyed to provide identification except during voice transmission.

2. When a radio beacon is used in conjunction with the Instrument Landing System markers, it is called a Compass Locator.

3. All radio beacons except the compass locators transmit a continuous three-letter identification in code except during voice transmissions. Compass locators transmit a continuous two-letter identification in code. The first and second letters of the three-letter location identifier are assigned to the front course outer marker compass locator (LOM), and the second and third letters are assigned to the front course middle marker compass locator (LMM).

#### Example:

ATLANTA, ATL, LOM-AT, LMM-TL.

4. Voice transmissions are made on radio beacons unless the letter "W" (without voice) is included in the class designator (HW).

5. Radio beacons are subject to disturbances that result in ADF needle deviations, signal fades and interference from distant station during night operations. Pilots are cautioned to be on the alert for these vagaries.

#### VHF OMNIDIRECTIONAL RANGE (VOR)

1. VOR's operate within the 108.0-117.95 MHz frequency band and have a power output necessary to provide coverage within their assigned operational service volume. The equipment is VHF, thus, it is subject to line-of-sight restriction, and its range varies proportionally to the altitude of the receiving equipment. There is some "spill over," however, and reception at an altitude of 1000 feet is about 40 to 45 miles. This distance increases with altitude.

2. There is voice transmission on the VOR frequency available over the VOR's.

3. The effectiveness of the VOR depends upon proper use and adjustment of both ground and airborne equipment.

a. **Accuracy:** The accuracy of course alignment of the VOR is excellent, being generally plus or minus 1°.

b. **Roughness:** On some VORs, minor course roughness may be observed, evidenced by course needle or brief flag alarm activity (some receivers are more subject to these irregularities than others). At a few stations, usually in mountainous terrain, the pilot may occasionally observe a brief course needle oscillation, similar to the indication of "approaching station." Pilots flying over unfamiliar routes are cautioned to be on the alert for these vagaries, and in particular, to use the "to-from" indicator to determine positive station passage.

(1) Certain propeller RPM settings can cause the VOR Course Deviation Indicator to fluctuate as much as  $\pm 6^\circ$ . Slight changes to the RPM setting will normally smooth out this roughness. Helicopter rotor speeds may also cause VOR course disturbances. Pilots are urged to check for this propeller modulation phenomenon prior to reporting a VOR station or aircraft equipment for unsatisfactory operation.

4. The only positive method of identifying a VOR is by its Morse Code identification or by the recorded automatic voice identification which is always indicated by use of the word "VOR" following the range's name. Reliance on determining the identification of an omnirange should never be placed on listening to voice transmissions by the Flight Service Station (FSS) (or approach control facility) involved. Many FSS remotely operate several omniranges which have different names from each other and in some cases none have the name of the "parent" FSS. (During periods of maintenance the coded identification is removed. See MAINTENANCE OF FAA NAVAIDS.)

● 5. Voice identification has been added to numerous VHF omniranges. The transmission consists of a voice announcement, "AIRVILLE VOR" alternating with the usual Morse Code identification.

---

378

Is the Airman's Information Manual designed for use by the pilot or the air traffic controller?

.....

---

The pilot

---

379

Which of the four parts of the AIM contains information about air traffic procedures? Refer to frame 353.

.....

---

Part I

---

The En Route Air Traffic Control Handbook prescribes air traffic control procedures and phraseology for use by personnel providing en route air traffic control services. See example below.

7110.90

## EN ROUTE AIR TRAFFIC CONTROL



JANUARY 1 1975

DEPARTMENT OF TRANSPORTATION  
FEDERAL AVIATION ADMINISTRATION

Air Traffic Service

Controllers are required to be familiar with the provisions of this handbook which pertain to their operational responsibility and to exercise their best judgment if they encounter situations not covered by it. Revisions for this handbook are published and distributed to you every three months. You will be responsible for updating your personal copy.

The following table of contents was taken from the En Route Air Traffic Control Handbook.

## TABLE OF CONTENTS

### Chapter 1. INTRODUCTION

	<i>Page</i>
<b>Section 1. TERMS OF REFERENCE</b>	
1. Word Meanings .....	1
2. Notes .....	1
3. Symbols .....	1
4. Manual Changes .....	2
5. SAGE Application .....	2
6. Military Procedures Identification .....	2
7. Recommendations for Procedural Changes .....	3
8-17. Reserved .....	3
<b>Section 2. RESPONSIBILITIES</b>	
18. Control Responsibility .....	4
19. Stage A Sector Eligibility .....	4
20. Procedural Applications .....	4
21. Military Procedures Application .....	4
22. Use of MARSA .....	5
23-31. Reserved .....	5
<b>Section 3. DEFINITIONS</b>	
32. Definitions .....	6
33. Reserved .....	14
<b>Section 4. ABBREVIATIONS</b>	
34. Abbreviations .....	15
35-54. Reserved .....	16

### Chapter 2. GENERAL CONTROL

<b>Section 1. GENERAL</b>	
55. Duty Priority .....	17
56. Procedural Preference .....	17
57. Operational Priority .....	17
58. Control Transfer .....	18
59-63. Reserved .....	18
64. Radio Communications Transfer .....	18
65. Formation Flights .....	19
66. Pilot Requests .....	19
67. Expeditious Compliance .....	19
68-77. Reserved .....	19
<b>Section 2. WEATHER INFORMATION</b>	
78. Familiarization .....	20
79. Deleted .....	20
80. Pilot Weather Reports .....	20
81. PIREP Information .....	20
82. Responsibility .....	21
83. SIGMET Alert .....	21
84. Reporting Minimums .....	22
85-93. Reserved .....	22



Scan this page.

**TABLE OF CONTENTS—Continued**

	<i>Page</i>
<b>Section 3. NAVAID USE LIMITATIONS</b>	
94. Altitude and Distance Limitations .....	23
95. Exceptions .....	24
96. Crossing Altitude .....	24
97. VFR Conditions on Top .....	24
98. Fix Use .....	24
99. High Altitude Fixes .....	24
100-109. Reserved .....	24
<b>Section 4. REPORTING ESSENTIAL FLIGHT INFORMATION</b>	
110. Responsibility .....	25
111-121. Reserved .....	25
<b>Section 5. RADIO AND INTERPHONE COMMUNICATIONS</b>	
122. Radio Communications .....	26
123. Monitoring .....	26
124. Authorized Interruptions .....	26
125. Authorized Transmissions .....	26
126. Authorized Relays .....	26
127-132. Reserved .....	26
133. Interphone Transmission Priorities .....	26
134. Priority Interruption .....	27
135. Interphone Message Termination .....	27
136. Radio Message Format .....	27
137. Abbreviated Transmissions .....	28
138-142. Reserved .....	28
143. Words and Phrases .....	28
144. Emphasize for Clarity .....	29
145. ICAO Phonetics .....	29
146. Numbers Usage .....	30
147. Facility Identification .....	31
148. Aircraft Identification .....	32
149. Description of Aircraft Types .....	34
150-159. Reserved .....	35
<b>Section 6. ROUTE AND NAVAID DESCRIPTION</b>	
160. Airways and Routes .....	36
161. Navaid Terms .....	36
162. Navaid Fixes .....	36
163. Navaid Malfunctions .....	37
164-173. Reserved .....	37
<b>Section 7. ALTIMETER SETTINGS</b>	
174. Current Settings .....	38
175. Source Identification .....	38
176. Operation Below FL 180 .....	38
177. Descent Below Lowest Usable Flight Level .....	38
178-182. Reserved .....	38
183. Destination Setting .....	38
184. Millibar Settings .....	39
185. Requested Settings .....	39
186-195. Reserved .....	39

## Section 6. ROUTE AND NAVAID DESCRIPTION

## 160. AIRWAYS AND ROUTES

Describe airways or jet routes as follows:

a. VOR/VORTAC/TACAN airways or jet routes—state the word “victor” or the letter “J”, followed by the number of the airway or route in group form. For RNAV routes add the word “ROMEO”. (E)

b. VOR/VORTAC/TACAN alternative airways—state the word “victor,” followed by the number of the airway in group form and the alternative direction. (E)

c. L/MF airways—state the color of the airway, followed by the number in group form. (E)

## 160.a. Examples.—

“Victor twelve.”

“J five thirty three.”

“Victor seven ten ROMEO.”

“J eight thirty ROMEO.”

“Offset one zero miles right of J eight thirty ROMEO.”

## 160.b. Example.—

“Victor twelve south.”

## 160.c. Example.—

“Blue eighty one.”

## 161. NAVAID TERMS

Describe radials, arcs, courses, and bearings of navaids as follows:

a. VOR/VORTAC/TACAN navaids—state the name of the navaid, followed by the separate digits of the bearing of the radial (omitting the word “degrees”), and the word “radial.” (E)

## 161.a. Example.—

“Appleton zero five zero radial.”

b. Arcs about VOR-DME/VORTAC/TACAN navaids—state the distance in miles from the navaid, followed by the words “mile arc,” the direction from the navaid in terms of the 8 principal points of the compass, the word “of,” and the name of the navaid. (E)

## 161.b. Example.—

“One five mile arc southwest of Grantsville.”

c. L/MF navaids—state the name of the station, followed by the bearing of the course from the station in terms of the 8 principal points of the compass, and the word “course.” (E)

## 161.c. Example.—

“Roswell northeast course.”

d. Nondirectional beacons—state the course to, or bearing from, the radio beacon, omitting the word “degree,” followed by the words “course to” or “bearing from,” the name of the radio beacon and the words “radio beacon.” (E)

## 161.d. Example.—

“Three four zero bearing from Randolph Radio Beacon.”

## 162. NAVAID FIXES

Describe fixes determined by reference to a radial/localizer and distance from a VOR-DME/VORTAC/TACAN/ILS-DME as follows:

a. When a fix is not named, state the name of the navaid followed by the specified radial/localizer and state the distance in miles followed by the phrase “mile fix”. (E)

## 162.a. Examples.—

“Appleton zero five zero radial three seven mile f

“Reno localizer back course 4 mile fix.”

---

384

What type of information will you find listed under Chapter 2?  
Refer to frame 359.

.....

---

General Control

---

385

What information is contained in sections 6 and 7? Refer to frame  
360.

.....

.....

---

Route and Navaid Description

Altimeter Settings

---

386

Write the phraseology for Appleton 50 degree radial. Refer to  
frame 361.

.....

---

Appleton zero five zero radial

---

The Terminal Air Traffic Control Handbook prescribes air traffic control procedures and phraseology for use by personnel providing terminal air traffic control services. See example below.

7110.80

## TERMINAL AIR TRAFFIC CONTROL



JANUARY 1 1975

**DEPARTMENT OF TRANSPORTATION**  
**FEDERAL AVIATION ADMINISTRATION**

**Air Traffic Service**

Controllers are required to be familiar with the provisions of this handbook which pertain to their operational responsibility and to exercise their best judgment if they encounter situations not covered by it. Revisions for this handbook are published and distributed to you every three months. You will be responsible for updating your personal copy.

Scan this Table of Contents from the Terminal Handbook.

7110.80

Page i

## TABLE OF CONTENTS

### Chapter 1. INTRODUCTION

	<i>Page</i>
<b>Section 1. TERMS OF REFERENCE</b>	
1. Word Meanings .....	1
2. Notes .....	2
3. Symbols .....	2
4. Manual Changes .....	2
5. Military Procedures Identification .....	2
6. Recommendations for Procedural Changes .....	3
7-12. Reserved	
<b>Section 2. RESPONSIBILITIES</b>	
13. Control Responsibility .....	4
14. Procedural Applications .....	4
15. Military Procedures Application .....	4
16. Use of MARSA .....	5
17-22. Reserved	
<b>Section 3. DEFINITIONS</b>	
23. Definitions .....	6
24. Reserved	
<b>Section 4. ABBREVIATIONS</b>	
25. Abbreviations .....	15
26-27. Reserved	

### Chapter 2. GENERAL CONTROL

<b>Section 1. GENERAL</b>	
28. Duty Priority .....	17
29. Procedural Preference .....	17
30. Operational Priority .....	17
31. Control Transfer .....	18
32-34. Reserved	
35. Radio Communications Transfer .....	18
36. Formation Flights .....	19
37. Requests .....	20
38. Expeditious Compliance .....	20
39-59. Reserved	
<b>Section 2. WEATHER INFORMATION</b>	
60. Familiarization .....	21
61. Pilot Weather Reports (PIREP) .....	21
62. Responsibility .....	21
63-69. Reserved	
70. PIREP Information .....	21
71. SIGMET Alert .....	22
72. Reporting Weather Conditions .....	22
73-89. Reserved	
<b>Section 3. NAVAID USE LIMITATIONS</b>	
90. Altitude and Distance Limitations .....	23
91. Exceptions .....	24

Scan:

Page vi

7110.80

**TABLE OF CONTENTS—Continued**

	<i>Page</i>
782. Through Clearances .....	93
783. ALTRV Clearance .....	93
784. Composite Flight Plans .....	93
785-789. Reserved	
<b>Section 3. VERTICAL SEPARATION</b>	
790. Application .....	94
791. Minima .....	94
792. Separation by Pilots .....	94
793-799. Reserved	
<b>Section 4. ALTITUDE ASSIGNMENT</b>	
790. Flight Direction .....	95
791. Exceptions .....	95
792. Lowest Usable Flight Level .....	96
793. Altitude Information .....	96
794-799. Reserved	
790. Anticipated Changes .....	97
791. Minimum En Route Altitudes .....	97
792. Adjusted Minimum Flight Level .....	98
793-800. Reserved	
<b>Section 5. ALTITUDE VERIFICATION AND POSITION REPORTING</b>	
810. Altitude Verification—Non-Automatic Altitude Reporting .....	99
811. Altitude Verification—Automatic Altitude Reporting .....	99
812. Altitude Verification—Automatic Altitude Reporting Using "Quick Look" .....	100
813. Nonreceipt of Position Reports .....	100
814. Duplicate Position Reports .....	101
815-820. Reserved	
<b>Section 6. LONGITUDINAL SEPARATION</b>	
820. Application .....	102
821. Minima on Same, Converging, or Crossing Courses .....	102
822. Minima on Opposite Courses .....	103
823. Separation by Pilots .....	107
824. RNAV Aircraft Along VOR Airways/Routes .....	107
825-840. Reserved	
<b>Section 7. LATERAL SEPARATION</b>	
850. Application .....	108
851. Minima Along Other than Established Airways or Routes .....	108
852. Minima on Diverging Radials .....	110
853. DME Minima .....	110
854. RNAV Minima—Diverging/Crossing Courses .....	111
855-860. Reserved	
<b>Section 8. ROUTE ASSIGNMENT</b>	
870. Route Use .....	112
871. Uncontrolled Airspace .....	113
872. Alternative Routes .....	113
873. Route Structure Transitions .....	113
874-879. Reserved	
880. Restricted Airspace .....	114
881. Restricted Airspace Avoidance .....	114
882. Intensive Student Jet Training Areas .....	115
883. Joint-Use Warning Areas .....	115
884-900. Reserved	
<b>Section 9. HOLDING AIRCRAFT</b>	
900. Delay Anticipated .....	116
901. Delay Not Anticipated .....	116
902. Lengthy Delay .....	116
903. General Holding .....	116
904. Detailed Holding .....	117

Read this page from the Terminal Handbook.

Page 114

7110.90

#### 880. RESTRICTED AIRSPACE

If you are controlling an aircraft (including one maintaining VFR conditions-on-top in accordance with an IFR clearance, in an area adjacent to restricted airspace, take the following action before it enters the restricted airspace:

##### a. For joint-use restricted airspace:

(1) Coordinate, as necessary, with the facility designated as controlling facility or the using agency and obtain permission for the aircraft to operate in the airspace. (N)

(2) Clear the aircraft so it avoids the airspace if permission cannot be obtained.

##### b. For prohibited and nonjoint-use restricted airspace:

Clear the aircraft so it avoids the restricted airspace, unless one of the following conditions exists: (N)

(1) The aircraft informs you it has obtained permission from the using agency to operate in the airspace.

(2) The using agency informs you they have given permission for the aircraft to operate in the airspace. (N)

(3) The aircraft is on an approved ALTRV. (N)

#### 881. RESTRICTED AIRSPACE AVOIDANCE

Take the following action to clear an aircraft so it avoids restricted airspace:

a. For an aircraft maintaining a specified altitude—clear it at an altitude or via a route which will avoid the airspace.

b. For an aircraft maintaining VFR conditions on top—clear it to conduct flight in VFR conditions on top above the upper limit or below the lower limit of the airspace.

##### Phraseology:

MAINTAIN V-F-R CONDITIONS ON TOP ABOVE [upper limit of restricted airspace] OR BELOW [lower limit of restricted airspace] ACROSS [name or number of restricted airspace] BETWEEN [fix] AND [fix].

c. For an aircraft on a radius-of-action flight—clear it via courses, quadrants, or radials within a radius of a navaid, excluding the airspace.

##### Phraseology:

CLEARED TO FLY [specified] COURSES/RADIALS/QUADRANTS OF [navaid name and type] WITHIN [number of miles] MILE/RADIUS EXCLUDING:

[Name or number of restricted airspace].

or

ALL RESTRICTED AIRSPACE.

880.a.(1). *Note.*—The FAA is the controlling agency for joint-use restricted airspace, therefore, flight therein is authorized if permission is obtained from the using agency.

880.b. *Note.*—The FAA has no jurisdictional authority over the use of prohibited or nonjoint-use restricted airspace, therefore, clearance cannot be issued for flight therein.

880.b.(2). *Note.*—Using agency approval for flight in prohibited or nonjoint-use restricted airspace may be relayed to the pilot.

880.b.(3). *Note.*—Mission project officers are responsible for obtaining approval for ALTRV operations within restricted airspace.

---

391

What chapter and section covers navaid use limitations? Refer to frame 366.

.....  
.....

---

Chapter 2

Section 3

---

392

What information is contained in sections 4 and 9? Refer to frame 367.

.....  
.....

---

Altitude Assignment

Holding Aircraft

---

393

Which of the following can be found in the Terminal Handbook? Refer to frame 368.

- ..... A. Restricted Airspace
- ..... B. Contractions

---

A.

---



The Flight Services Handbook contains instructions for personnel performing flight service duties. It consists of two parts. Part I prescribes procedures and phraseology for use by personnel providing flight assistance and communications services. Part II, the teletypewriter portion, includes Services A and B teletypewriter operating procedures, pertinent International Teletypewriter Procedures, and the Weather Schedules. See example below.

#### FRONT COVER

7110.10C

## FLIGHT SERVICES



JANUARY 1 1975

**DEPARTMENT OF TRANSPORTATION**  
**FEDERAL AVIATION ADMINISTRATION**

**Air Traffic Service**

Flight Service Specialists are required to be familiar with the provisions of this handbook which pertain to their operational responsibilities and to exercise their best judgement if they encounter situations not covered by it.

Revisions for the Flight Services Handbook are published and distributed to you every three months. You are responsible for updating your personal copy.

SCAN

7110.10C

## TABLE OF CONTENTS—PART I

Page I

### Chapter 1. INTRODUCTION

#### Section 1. RESPONSIBILITY

1. Scope .....	Page 1
2. Procedural Applications .....	1
3. Priority of Duties .....	1
4-9. Reserved .....	1

#### Section 2. TERMS OF REFERENCE

10. Word Meanings .....	2
11. Notes .....	2
12. Manual Changes .....	2
13. Definitions .....	2
14. Abbreviations .....	5
15-19. Reserved .....	6

### Chapter 2. MONITORING

#### Section 1. NAVIGATION AIDS

20. Duties .....	7
21. Malfunctions .....	8
22. Aircraft-reported Malfunctions .....	8
23. Adjustments to Navaids .....	8
24. Navaid Flight Check .....	8
25-29. Reserved .....	8

#### Section 2. INTERPHONE, RADIO, AND TWEE

30. Interphone (Service F) .....	9
31. Radio .....	9
32. Transcribed Weather Broadcast (TWEE) .....	9
33-39. Reserved .....	9

### Chapter 3. RADIO AND INTERPHONE COMMUNICATIONS

#### Section 1. RADIO COMMUNICATIONS

50. Frequency Use .....	11
51. Authorized Transmissions .....	11
52. Authorized Relays .....	11
53. Radio Message Format .....	11
54. Abbreviated Transmissions .....	11
55. Routine Radio Contacts .....	12
56-59. Reserved .....	12

#### Section 2. INTERPHONE COMMUNICATIONS

70. Interphone Transmission Priorities .....	13
71. Priority Interruption .....	13
72. Message Termination .....	13
73-79. Reserved .....	13

## READ

7110.10C

Page 7

**Chapter 2. MONITORING****Section 1. NAVIGATION AIDS****20. DUTIES**

When the Air Traffic Division has assigned your facility the responsibility for monitoring NAVAIDS, take the following actions, as appropriate:

**a. VOR/VORTAC**

(1) Aurally check the identification at the beginning of each watch.

(2) Record the check on FAA Form 7230-4.

(3) If a monitor category 2 exists, notify the center.

**NOTE 1.**—VOR's VORTAC's and TACAN's have an automatic course alignment and signal monitor (ACM). This monitor is usually connected to a remote alarm. An automatic transfer and shutdown unit (ATU) is installed as part of the ACM. When the ACM detects a malfunction, the ATU switches the range to a standby transmitter. If the standby transmitter does not work properly, the ATU will shut down the facility.

**NOTE 2.**—Monitoring of VOR test signals (VOT) is accomplished by a light or buzzer monitor and is of local concern only.

**NOTE 3.**—VOR and VORTAC monitor categories:

(a) Category 1—Alarm feature and identification heard at control point.

(b) Category 2—Monitor equipment failure and identification not heard at control point but aircraft reports indicate facility operating normally.

(c) Category 3—Not constantly monitored by other than ACM and ATU.

**b. TACAN (joint use airports):**

(1) Aurally check the identification at the beginning of each watch.

(2) Immediately notify the responsible military authority when an alarm is received.

(3) Consider the aid inoperative when the alarm cannot be silenced and the identification cannot be heard on the usual monitor.

**NOTE.**—The military authority will issue Notices to Airmen for TACAN's; except, in the Pacific Region, the FAA will issue the Notices to Airmen on TACAN's.

**NOTE.—Alaska.** Tie-in facilities shall transmit Notices to Airmen originated by military officials on military aids.

**c. DME** (monitored by the same facility that monitors the associated VOR, VORTAC, or ILS):

(1) Press the VORW/DME control oscillator level to "facility on" position at the beginning of each watch.

(2) Record the check on FAA Form 7230-4.

**d. L/MF aids** (to be monitored on a continuous basis):

(1) Check the identification at the beginning of each watch.

(2) Record the check on FAA Form 7230-4.

**e. NDB (class HH, H, and MH):**

(1) Monitor continuously by automatic means beacons used as IFR aids.

(2) Check operation at least once each hour if an automatic alarm is not available.

**f. ILS:**

(1) Check the ILS monitor panel at the beginning of each watch and record the system status on Form 7230-4.

(2) When there are indications that a component (localizer, glide path, outer marker, middle marker) has failed, shut off that component and allow the rest of the system to continue operating.

**NOTE.**—Not all ILS components will be provided with remote monitor and control lines (on/off capability). If the failure indication is caused by a control line or control station monitor failure the Airways Facility technician shall advise if that component will be restored to operation and the monitor status. Reference SM P 6750.1 and SM P 6750.2.

---

397

What information is contained in Chapter 2? Section 1? Refer to frame 373.

.....

.....

---

Monitoring

Navigational Aids

---

398

At the beginning of each watch, what does an FSS specialist do concerning VOR/VORTAC? Refer to frame 374.

.....


---

Check the identification

---

The Air Traffic Control Handbook prescribes air traffic control procedures and phraseology for use by personnel providing air traffic control service.

### FRONT COVER

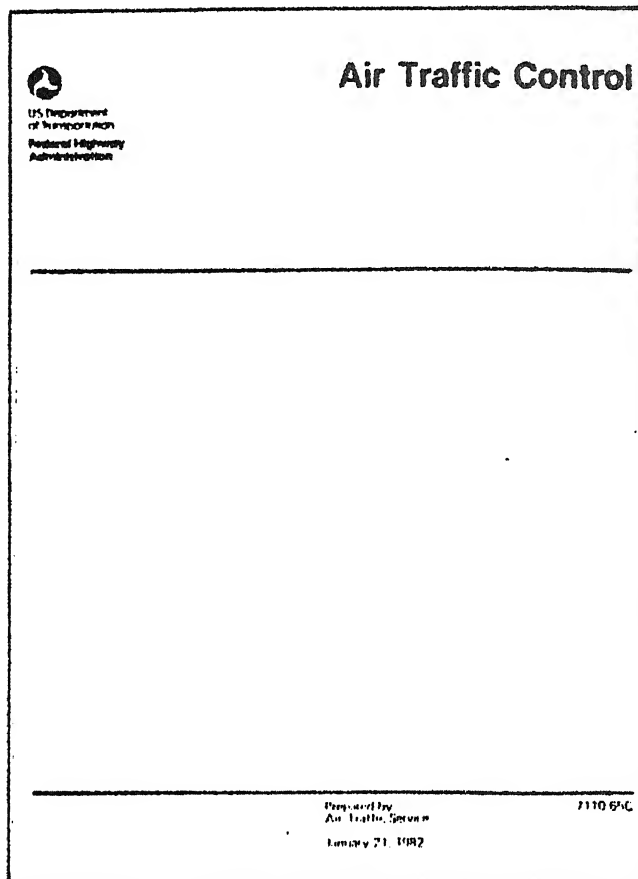

Controllers are required to be familiar with the provisions of this handbook which pertain to their operational responsibility and to exercise their best judgment if they encounter situations not covered by it. Revisions for this handbook are published and distributed to you every three months. You will be responsible for updating your personal copy.

## TABLE OF CONTENTS

Chapter 1. INTRODUCTION		Page
Section 1. GENERAL		
1. Purpose .....		1
2. Distribution .....		1
3. Cancellation .....		1
4. Explanation of Major Changes .....		1
5. Effective Date .....		2
6. Reserved .....		2
Section 2. TERMS OF REFERENCE		
7. Word Meanings .....		3
8. Notes .....		3
9. Annotations .....		3
10. Recommendations for Procedural Changes .....		3
11. Publication and Delivery Dates .....		4
12-13. Reserved .....		4
Section 3. APPLICATION OF AIR TRAFFIC CONTROL SERVICE		
14. ATC Service .....		5
15. Constraints Governing Supplements and Procedural Deviations .....		5
16. Procedural Letters of Agreement .....		5
17. Use of MARSAs .....		5
18. Military Procedures .....		5
19-20. Reserved .....		6
Section 4. ABBREVIATIONS		
21. Abbreviations .....		7
Chapter 2. GENERAL CONTROL		
Section 1. GENERAL		
22. Duty Priority .....		9
23. Procedural Preference .....		9
24. Operational Priority .....		9
25. Control Transfer .....		10
26. Radio Communications Transfer .....		10
27. Formation Flights .....		11
28. Pilot Requests .....		11
29. Expeditious Compliance .....		11
30. In-flight Deviations From Transponder/Mode C Requirements Between 12,500 Feet and 18,000 Feet .....		11
31. In-flight Equipment Malfunctions .....		12
32. Airport Traffic Areas .....		12
33. Safety Advisory .....		12
34. Coordinate Use of Airspace .....		13
35. Minimum Fuel .....		13
36. Transfer of Position Responsibility .....		13
37-39. Reserved .....		13
Section 2. WEATHER INFORMATION		
40. Familiarization .....		14
41. SIGMET Alert .....		14
42. Reporting Weather Conditions .....		14
43-44. Reserved .....		14

Page iii

**TABLE OF CONTENTS—Continued**

	<i>Page</i>
<b>Section 3. ADDITIONAL SERVICES</b>	
45. Application .....	15
46. Traffic Advisories .....	15
47. Merging Target Procedures .....	16
48. Holding Pattern Surveillance .....	16
49. PIREP Information .....	16
50. Weather and Chaff Services .....	17
51. Disseminating Weather Information .....	17
52. Bird Activity Information .....	17
53-54. Reserved .....	18
<b>Section 4. NAVAID USE LIMITATIONS</b>	
55. Altitude and Distance Limitations .....	19
56. Exceptions .....	19
57. Crossing Altitude .....	19
58. VFR-On-Top .....	19
59. Fix Use .....	19
60-64. Reserved .....	20
<b>Section 5. REPORTING ESSENTIAL FLIGHT INFORMATION</b>	
65. Responsibility .....	21
66. Landing Area Condition .....	21
67-69. Reserved .....	21
<b>Section 6. RADIO AND INTERPHONE COMMUNICATIONS</b>	
70. Radio Communications .....	22
71. Monitoring .....	22
72. Authorized Interruptions .....	22
73. Authorized Transmissions .....	22
74. Authorized Relays .....	22
75. Radio Message Format .....	22
76. Abbreviated Transmissions .....	22
77. Interphone Transmission Priorities .....	23
78. Priority Interruption .....	23
79. Interphone Message Format .....	23
80. Interphone Message Termination .....	23
81. Reserved .....	23
82. Words and Phrases .....	23
83. Emphasize for Clarity .....	23
84. ICAO Phonetics .....	23
85. Numbers Usage .....	24
86. Facility Identification .....	25
87. Aircraft Identification .....	26
88. Description of Aircraft Types .....	28
89-99. Reserved .....	28
<b>Section 7. ROUTE AND NAVAID DESCRIPTION</b>	
100. Airways and Routes .....	29
101. NAVAID Terms .....	29
102. NAVAID Fixes .....	29
103. NAVAID Malfunctions .....	30
104-109. Reserved .....	30
<b>Section 8. ALTIMETER SETTINGS</b>	
110. Current Settings .....	31
111. Altimeter Setting Issuance Below Lowest Usable FL .....	31
112-119. Reserved .....	31

Scan this page from the Air Traffic Control Handbook.

1/21/82

7110.08C

## Section 7. ROUTE AND NAVAID DESCRIPTION

### 100. AIRWAYS AND ROUTES

Describe airways, route or jet routes as follows:

a. VOR/VORTAC/TACAN airways or jet routes—State the word "Victor" or the letter "J", followed by the number of the airway or route in group form. For RNAV routes add the word "Romeo."

#### 100.a. Examples.—

"Victor Twelve."  
 "J Five Thirty-three."  
 "Victor Seven Ten Romeo."  
 "J Eight Thirty Romeo."  
 "Offset one zero miles right of J Eight Thirty Romeo."

b. VOR/VORTAC/TACAN alternative airways—State the word "Victor," followed by the number of the airway in group form and the alternative direction.

#### 100.b. Example.—

"Victor Twelve South."

c. L/MF airways—State the color of the airway, followed by the number in group form.

#### 100.c. Example.—

"Blue Eighty-one."

d. North American Route—State the words "North American Route" followed by the number of the route in group form.

#### 100.d. Example.—

"North American Route Fifty."

e. MTRs—State the letters followed by the number of the route in group form.

#### 100.e. Example.—

"IR Five Thirty-one."

### 101. NAVAID TERMS

Describe radials, arcs, courses, bearings and quadrants of NAVAIDs as follows:

a. VOR/VORTAC/TACAN NAVAIDs—State the name of the NAVAID, followed by the separate digits of the radial (omitting the word "degrees"), and the word "radial."

#### 101.a. Example.—

"Appleton zero five zero radial."

b. Arcs about VOR-DME/VORTAC/TACAN NAVAIDs—State the distance in miles from the

NAVAID, followed by the words "mile arc," the direction from the NAVAID in terms of the 8 principal points of the compass, the word "of," and the name of the NAVAID.

#### 101.b. Example.—

"One five mile arc southwest of Grantsville."

c. Quadrant within a radius of NAVAID—State direction from NAVAID in terms of the quadrant, e.g., NE, SE, SW, NW, followed by the distance in miles from the NAVAID.

#### 101.c. Example.—

"Cleared to fly northeast quadrant of Philipsburg VORTAC within four zero mile radius."

101.e. Reference—Route Use, 290.h. Glossary (Quadrant).

d. Nondirectional beacons—State the course to, or bearing from, the radio beacon, omitting the word "degree," followed by the words "course to" or "bearing from," the name of the radio beacon, and the words "radio beacon."

#### 101.d. Example.—

"Three four zero bearing from Randolph Radio Beacon."

### 102. NAVAID FIXES

Describe fixes determined by reference to a radial/localizer and distance from a VOR-DME/VORTAC/TACAN/ILS-DME as follows:

a. When a fix is not named, state the name of the NAVAID, followed by a specified radial/localizer, and state the distance in miles followed by the phrase "mile fix".

#### 102.a. Examples.—

"Appleton zero five zero radial three seven mile fix."

"Reno localizer back course 4 mile fix."

b. When a fix is named, state the name of the fix, followed by the phrase "D-M-E fix" or "Waypoint" as appropriate.

#### 102.b. Examples.—

"Shum D-M-E fix."

"Shum Waypoint."



---

403

What type of information will you find listed under Chapter 2? Refer to frame 391.

.....

---

General Control

---

404

What information is contained in sections 6 and 7? Refer to frame 392.

.....

.....

---

Route and Navid Description

IFR Clearances

---

405

Write the phraseology for Appleton 50 degree radial. Refer to frame 393.

.....

---

Appleton zero five zero radial

---

## Section 12

### COMPUTERIZED AIR TRAFFIC CONTROL

#### AUTOMATED RADAR TERMINAL SYSTEMS (ARTS)

406

You have learned that the control of air traffic is complicated, requiring extensive technical knowledge on the part of the specialist, and support from other organizations such as Airways Facilities, Weather Bureau, etc. A major source of support to the specialist is the FAA Research and Development Section. Improvements in radar and other electronic devices continue to aid the specialist in his job. One product of research and development is the computerization of Air Traffic Control. Let's take a look at what a few Air Traffic Facilities are now using and what will become the everyday method of control in the future.

---

407

You have learned that the control of air traffic is complicated, requiring extensive technical knowledge on the part of the specialist, and support from other organizations such as Airways Facilities, Weather Bureau, etc. A major source of support to the specialist is the FAA Research and Development Section. Improvements in radar and other electronic devices continue to aid the specialist in his job. One product of research and development is the computerization of Air Traffic Control. Let's take a look at what a few Air Traffic Facilities are now using and what will become the everyday method of control in the future.

---

408

The demand for air traffic control services in the United States has been growing at the rate of nearly 20% a year. This rapid growth has necessitated the development of an air traffic control automation program for en route and terminal facilities. When this system is completed it will provide for automated control of aircraft at those centers and terminals where traffic is most complex.

---

409

The overall control system operates in a three-dimensional environment and depends upon the specialists' knowing the identity, position, and altitude of each aircraft. Identification and position of aircraft are two of the three items needed for control purposes. What is the third?

.....

---

Altitude

---

410

Currently, the position of the aircraft is the only information shown on the radar scope. Radio communication is needed between the pilot and controller to obtain identification and altitude information.

What information is now shown on the radar scope?

.....

---

n of the aircraft.

---

411

How does a controller obtain the identification and altitude of an aircraft?


.....

Radio communication.

412

In the new automated system all three items of information will automatically be shown on the scope by the use of alphanumeric (letters and numbers). In addition, weather information can be shown.

413

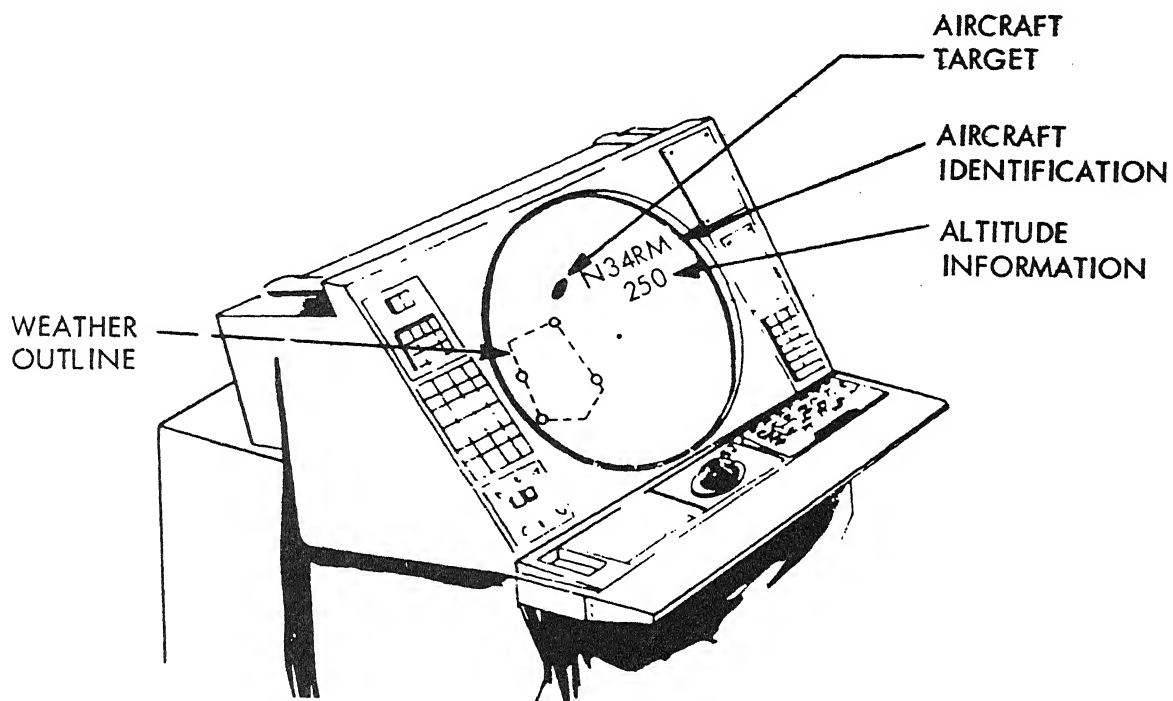


In the above illustration the controller observes the aircraft target on the scope. Adjacent to the target is the aircraft identification and altitude. As you can see, this will substantially reduce radio communications between pilots and controllers.

What does the word alphanumeric mean?

.....

Letters and numbers

The new system will display the identification of aircraft directly on the radar scope.

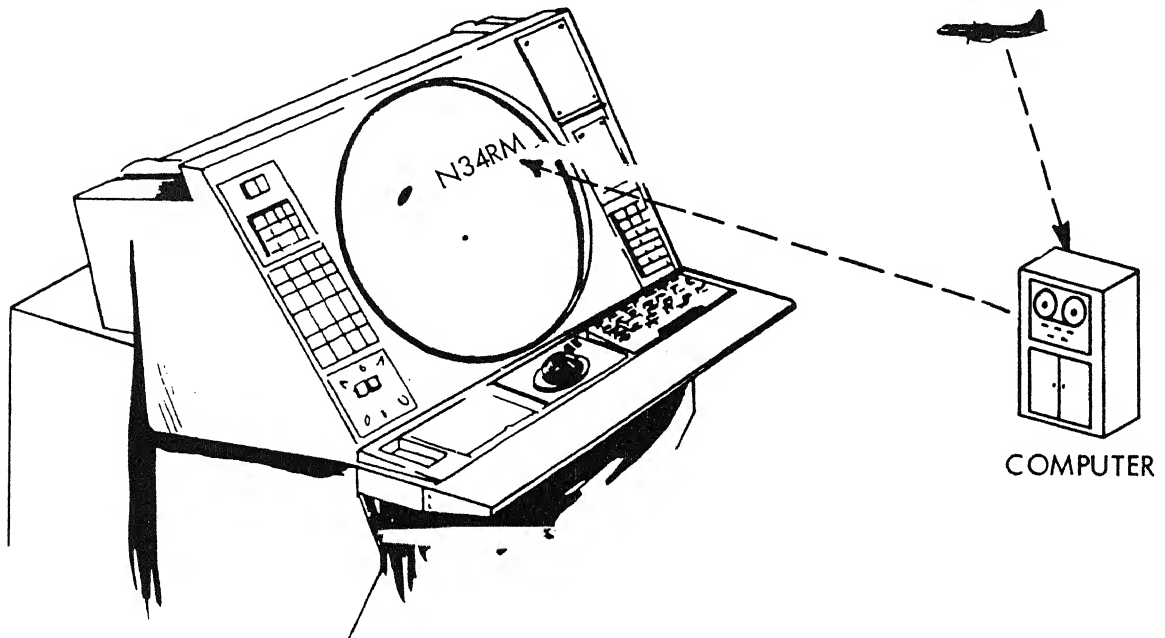


What is the aircraft identification in the above illustration?

.....

N34RM

In addition to identification, the altitude of the aircraft will be displayed automatically.

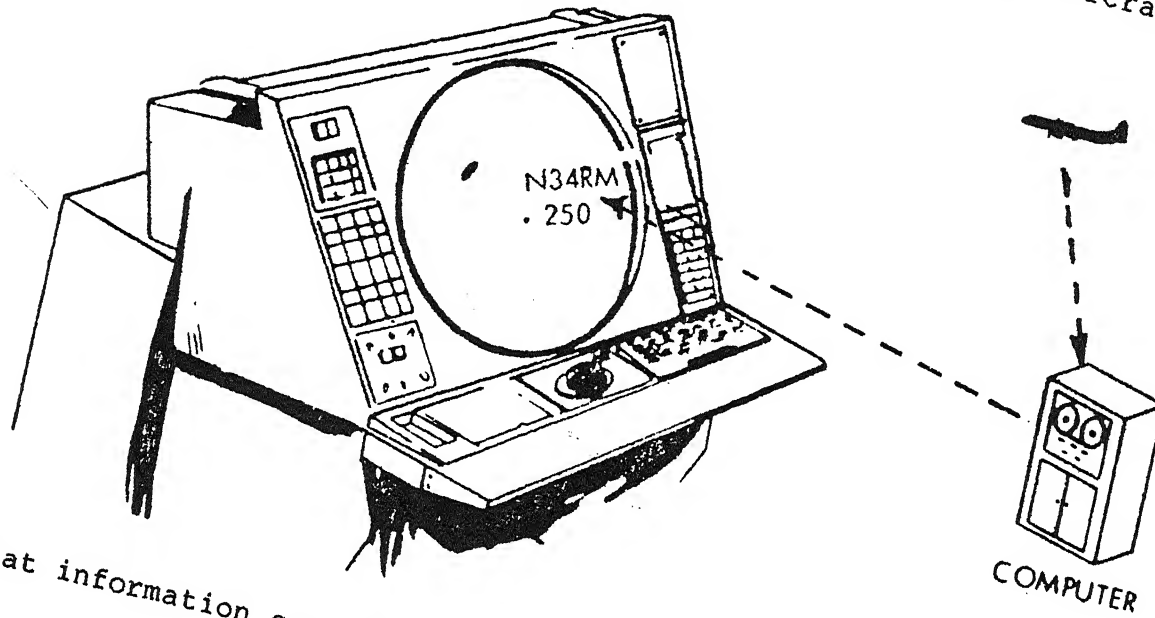

What information can alphanumeric present to the controller?  
 .....


Aircraft identification and altitude.

This system also provides for automatic handoff of an aircraft from one radar controller to another.



As the aircraft approaches a preselected handoff point the computer will automatically force the symbol, HAND, to appear on the transferring and receiving scopes. This symbol, HAND, will then blink on and off until appropriate action is taken by the receiving controller.

The receiving controller, when ready to accept this aircraft, will put an acceptance message into the computer and the symbol HAND will change to a blinking OVER.

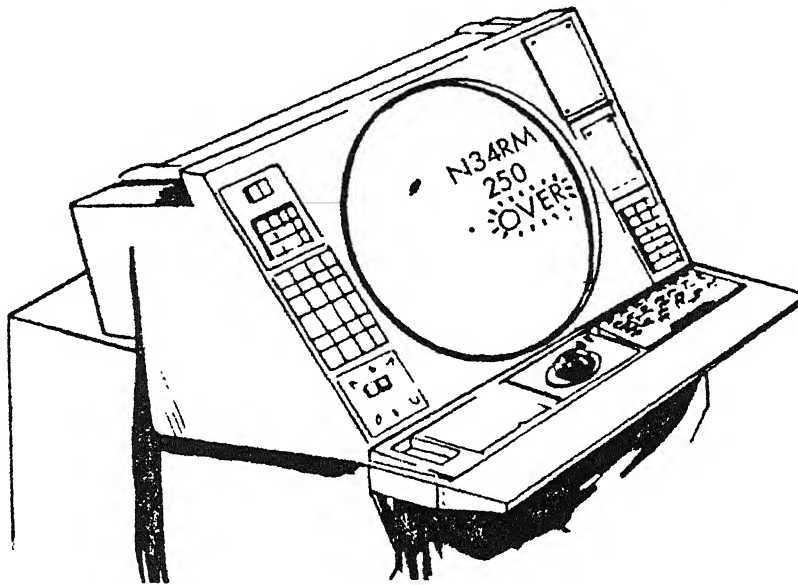

When the transferring controller sees the blinking word, OVER, he will transfer radio communication with the aircraft to the receiving controller.

What symbol on the radar scope indicates to the transferring controller that the receiving controller is ready to accept the aircraft on a handoff?

.....

-----  
The word "OVER" blinking on the scope.

Current handoff procedures require the transferring controller to call the receiving controller by interphone and state the aircraft's position. The receiving controller after observing the target on his scope then advises that he will accept the aircraft. Obviously the automatic handoff system using alphanumerics will reduce manual coordination considerably.




In addition to alphanumeric readouts, the new automated system also has the capability of adding other features such as conflict prediction, collision avoidance, and aircraft sequencing.


Computers will also be used to reduce the time spent in hand copying and transporting flight movement and other printed control information.

## COMPARE THE SYSTEMS

### —PRESENT— TELETYPEWRITER TELEPHONE

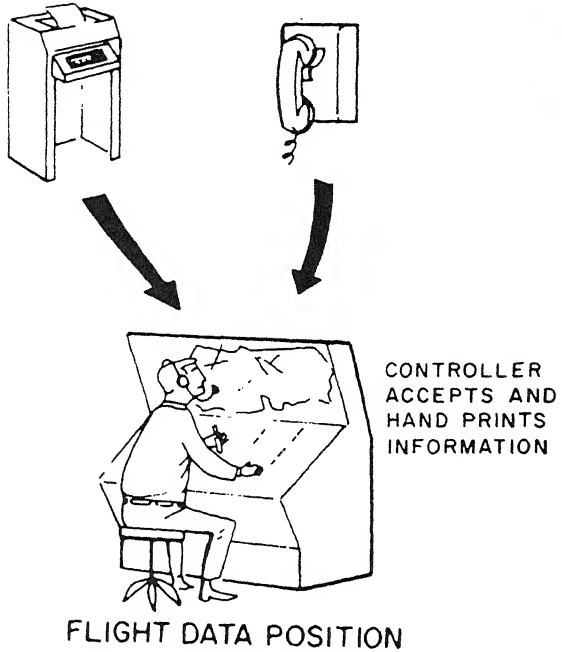

### —NEW— TELETYPEWRITER

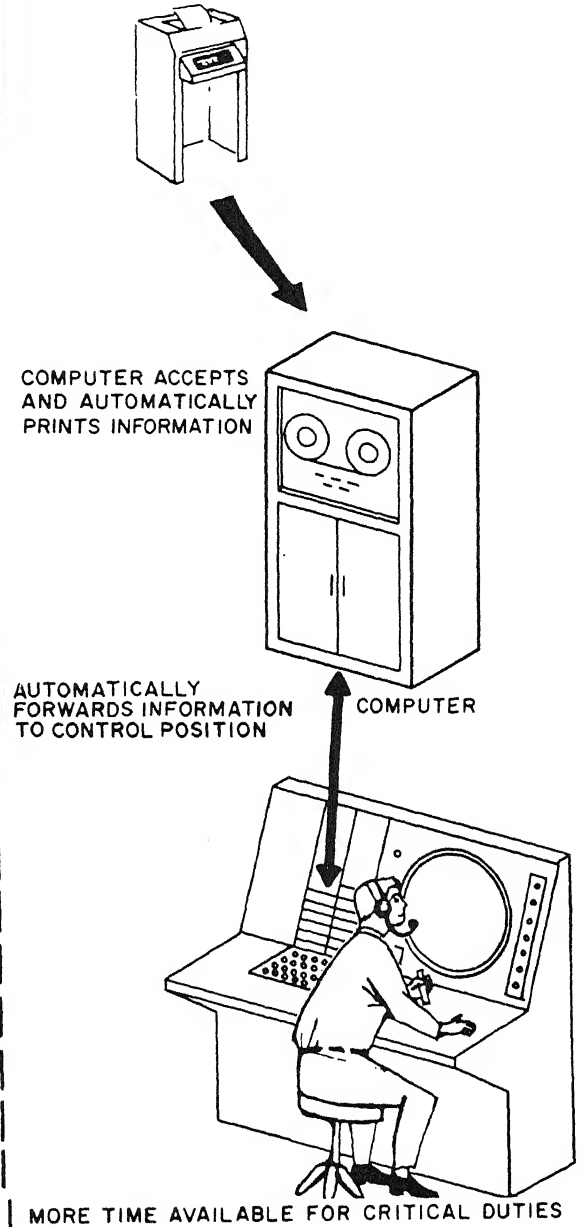

---

421

Name the advantage of the new system over the old.

.....

---

More time available for critical duties.

---

422

What term means letters and numbers?

.....

---

Alphanumerics

---

423


In the automatic handoff procedure what symbol appears on the radar scope to indicate the aircraft is approaching the preselected handoff point?

.....

---

The blinking word "HAND"

---

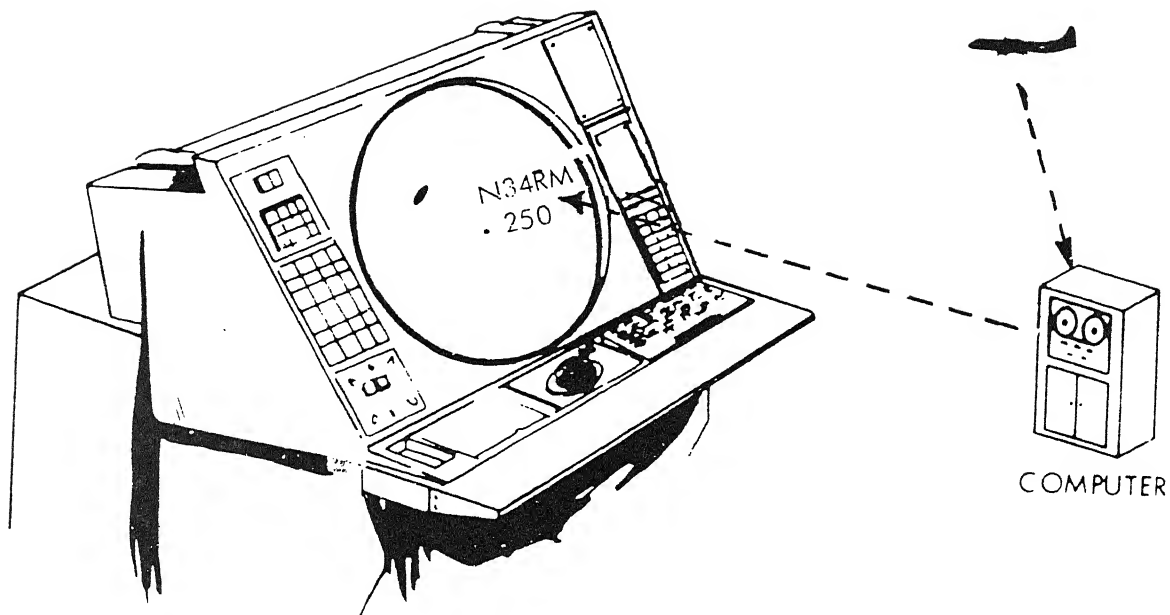

What is the altitude of the target in the above illustration?

.....

---

FL250

---

425

The new automation system will greatly enhance the safe accommodation of future air traffic workloads through the use of alphanumerics and the computerized printing and relaying of control information.

---

426

Up to this point you have received a broad overview of the National Airspace System, its components, and the duties of those who help make it work. You should be prepared to enter your next phase of training where you will learn in greater detail the skills needed to perform in your particular option. We are sure you will find serving the flying public a challenging and rewarding experience whether at a station, center, or tower. Again, welcome to the FAA.